



DTA-3X-W

27W

3ch



**FEATURES:**

- 3-pole IEC320-C14 AC inlet, Class I
- Black color plastic enclosed case
- 2 year warranty
- Triple Output




MODEL/CHANNEL		Unit	DTA27-3X-W		
<b>OUTPUT</b>	Output Voltage Min	Vdc	+5	+12	-12
	Output Load Max	A	3	0.8	0.25
	Output Load Min	A	0.3	0.1	0.03
	Ripple & Noise(max) *3	mV	50	120	120
	Output Limit Max	V	5.25	12.6	-13.2
	Output Limit Min	V	4.85	11.4	-10.8
	O/P Regulation	%	±3%	±5%	±8%
	Hold Up Time	-	> 10ms typical @full load, 115VAC		
<b>INPUT</b>	Input Voltage	Vac	90~264VAC		
	Input Current	A	2A @90VAC; 1A @264VAC max		
	Line Frequency	Hz	47Hz to 63Hz		
	Inrush Current Range	A	30A MAX. (COLD START AT MAX. LOAD & 110VAC) 60A MAX. (COLD START AT MAX. LOAD & 220VAC INPUT)		
	Efficiency	%	70% AC normal input & the Maximum load		
<b>Protection</b>	Over current Protection	-	+5 Overvoltage Range 5.6 to 6.5		
	Over Load Protection	-	+160% MAX		
	Short circuit protection	-	+5V to +12V		
<b>Environmental Agencies</b>	Safety	-	UL 60950-1	CSA C22.2-No.60950-1	TUV EN60950-1    CB IEC 60950-1
	EMC	-	CISPR22 Class B	EN 55022 Class B	FCC CERTIFICATE    CE
<b>Dielectric Withstand</b>	Primary to Secondary	-	3000VAC for 60 Sec.		
	Primary to Frame Ground	-	1500VAC for 60 Sec.		
	Secondary to Ground	-	500VAC for 60 Sec.		
<b>Environment</b>	Operating Temperature	-	0 to +60°C(Derate linearly 2.5% per °C from 41 to 60°C)		
	Operating Humidity	-	20 to 90% non-condensing		
	Storage Temperature	-	-10°C to +70°C		
	MTBF	-	>80,000 hours at full load and 25°C ambient temperature		
<b>Dimension</b>	Size(WxHxD) / Weight	mm/g	132(L) mm x 69(W) mm x 40(H) mm/0.42 kgs		





## MECHANICAL DIMENSIONS


27W

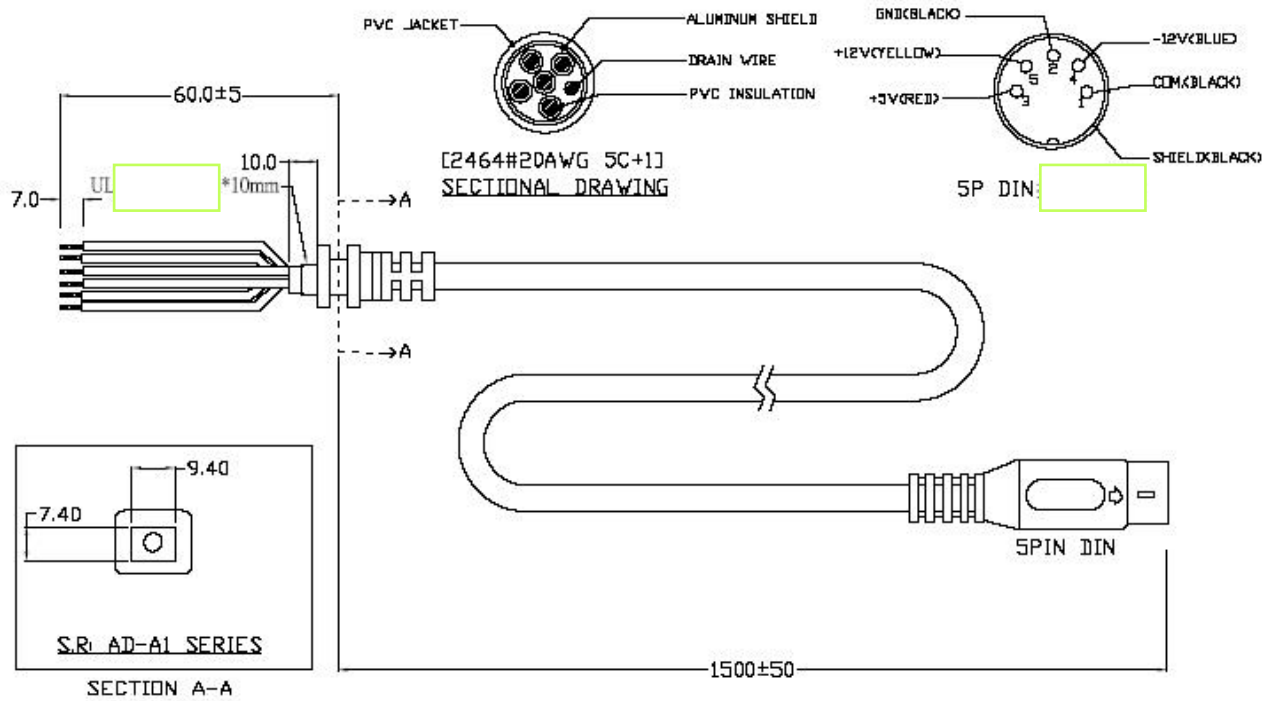



## MECHANICAL DIMENSIONS

27W

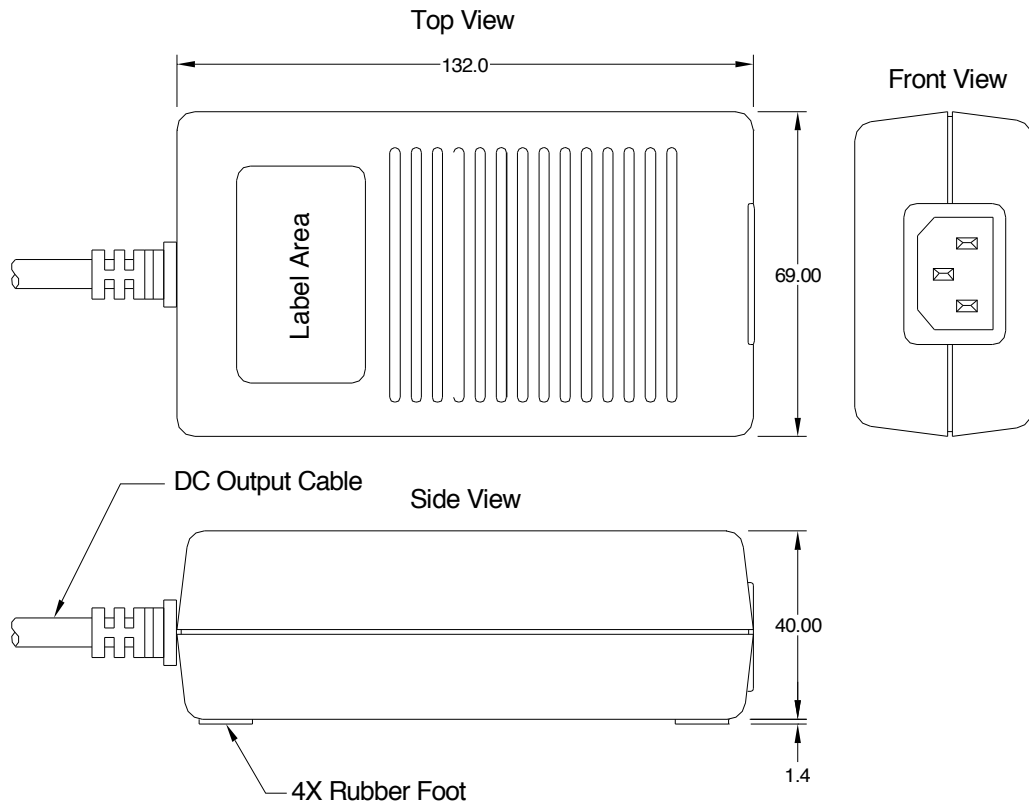

- Note:
1. AC Inlet : IEC320-C14
  2. Plastic Case Color : Black
  3. Tolerance :  $\pm 0.5\text{mm}$
  4. Unit : mm



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Desktop AC Adapters](#) category:*

*Click to view products by [ETA](#) manufacturer:*

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [PCM50UT04](#) [PCM50UT05](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#) [CPSUNOTAKY-07387](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#) [ME30A4803F01](#) [ME40A1203N01](#) [ME40A2403N01](#) [MENT1150A2451F01](#) [125530040F](#) [1255300611](#)