




# ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

AC/DC SWITCHING POWER SUPPLY  
AC INPUT 85~264V  
2 CHANNELS OUTPUT  
10 WATTS

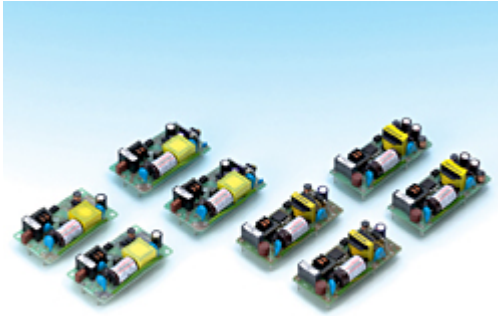


Dimension: W36×L78×H22mm



## OJS-WX SERIES

### General Description

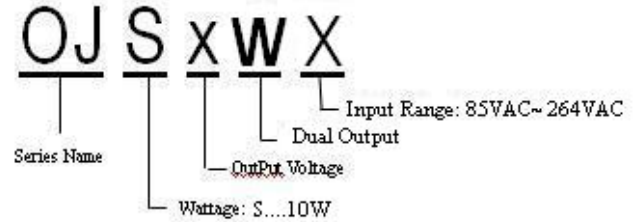

### Input

<b>Input Voltage:</b>	AC100-240V (DC130-320V)
<b>Input Range:</b>	AC85-264V (DC110-370V)
<b>Input Current:</b>	0.3-0.13A
<b>Frequency:</b>	50/60Hz
<b>Input Frequency Range:</b>	47-440Hz
<b>Phase:</b>	Single
<b>Inrush Current: *1</b>	20A (typical) at AC100V/48A (typical) at AC240V
<b>Leakage Current:</b>	45uA (typical) at Ta=25C and AC100Vin, 50Hz (measured by Yokogawa type-3226 1K Ohm/0.1uF)

Output Characteristics		Models			
		OJS22WX		OJS23WX	
Output Voltage	Vdc	+12	-12	+15	-15
Output Current	A	0.45	0.45	0.35	0.35
Voltage Tolerance	V	±0.24		±0.3	
Voltage Adjust Range		not available			
Ripple and Noise(max.) *3	mVpp	200		250	
<b>Regulation</b>					
a. Static Line Regulation	mV	96	96	120	120
b. Static Load Regulation *4	mV	±1600	±1600	±2000	±2000
Maximum *5		±540	±540	±675	±675
Maximum *6		±108	±108	±135	±135
c. Temperature Coefficient *7		0.03 [%/°C] Max			
e. Drift(maximum) *8		75		90	
f. Dynamic Load Regulation (typ.) *9		±540		±675	
g. Recovery Time	mV	20mS (typical)			
Rise up time	mS	200mS(maximum) at 25C and rated input/output			
Hold up time *10	mS	20mS(typical) at 25C and rated input/output			
<b>Efficiency</b>	*2	%	<b>72</b>		<b>72</b>





# ETA-USA

## HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature	-10 to 50°C at full load -10 to 71C (refer to derating curve)
Operating Humidity	20-90%/RH (non-condensing)
Storage Temperature	-20 to +85°C
Storage Humidity	20 to 90%/RH (non-condensing)
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute at 10mA Primary-Frame Ground AC2,500V for 1minute at 10mA Primary-Secondary-Frame Ground 100MOhm (minimum) by DC500V insulation tester
Isolation Resistance	Primary-Secondary-Frame Ground 100MOhm (minimum) by DC500V insulation tester
Vibration	5-10Hz:10mm double amplitude, 10-55Hz:19.6m/s <sup>2</sup> , for 60minutes each along X,Y,Z axes (non-operating)
Shock	196m/s <sup>2</sup>
Cooling	Convection
Functions	
Over current Protection *11	Foldback/Current Limiting with automatic recovery
Over voltage Protection	Not available
Remote Sense	Not available
Trimming of output voltage	Not available
Line Conducted Noise	Built to meet FCC Part15-B Class A Built to meet VCCI Class B
Safety	UL: UL60950 C-UL: CSA C22.2 No. 60950 (AC100V)
Weight [g] (typical)	Open board type:35g
MTBF [H]	1'000'000
Frequency [kHz] (typical)	64.4-372kHz (load 0 to 100%, input AC85 to 264V), 77/160kHz at rated input/output
Dimension [mm]	W36×L78×H22mm

Conditions:

- \*1 cold start
- \*2 at DC130V input, rated output and 25C
- \*3 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth
- \*4 at AC100/200V when output current changed from 0mA to rated current keeping the current of other output less than 10% of rated current
- \*5 at AC100/200V when output current changed from 0mA to rated current keeping the current of other output more than 10% of rated current
- \*6 at AC100/200V when output current of both channels changed from 0mA to rated current synchronously
- \*7 at -10 to +71°C
- \*8 only for 7hours from 1hour after switch-on at 25C and rated input/output
- \*9 when output current changed rapidly between 25% and 75% of rated current at rated input
- \*10 at AC100V input, 70% of rated output current of both channels
- \*11 for short period



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037  
Phone: 1-800-ETA-POWR, (408) 404-1685 Fax: (408) 779-2753


Visit us at: [www.eta-usa.com](http://www.eta-usa.com)  
email at: [sales@eta-usa.com](mailto:sales@eta-usa.com)




# ETA-USA

## HIGH QUALITY SWITCHING POWER SUPPLIES


### DIMENSION DIAGRAM (mm)

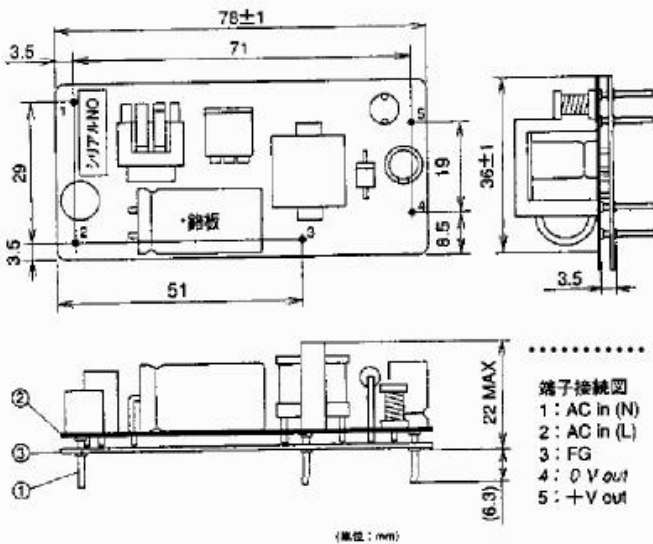


### DERATING CURVE

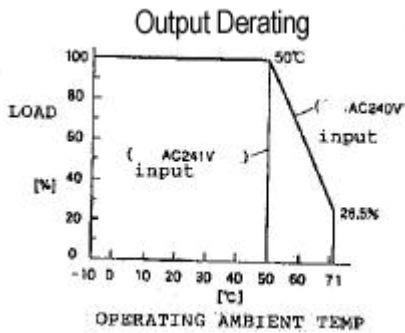


### OCP CURVE

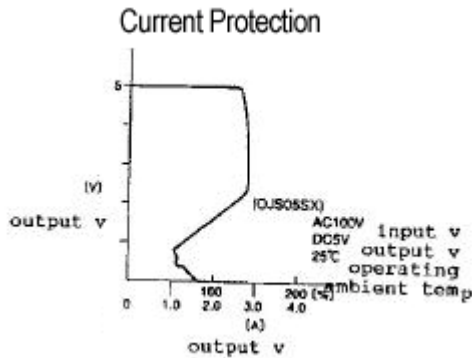

### EFFICIENCY CURVE

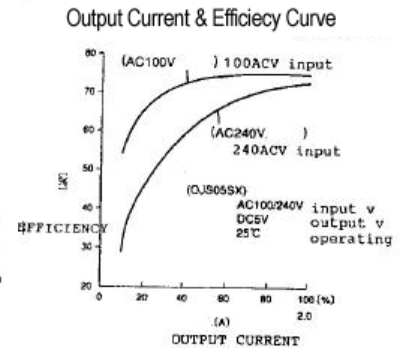

### BLOCK DIAGRAM

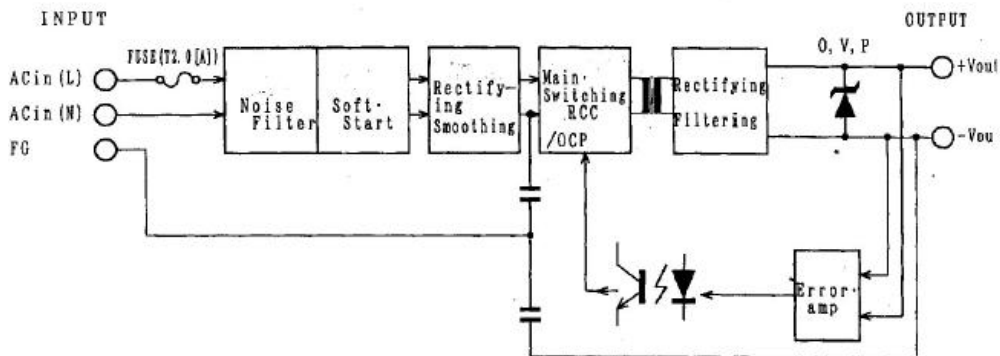

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [ETA](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)  
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)  
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)  
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)  
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)