



## VTD-SC-O

## 100W



### FEATURES

#### Available Inputs

- 12 VDC Nom (DC9~18V) • 48 VDC Nom(DC 38~63V)
- 24 VDC Nom(DC 18~36V) • 110 VDC Nom(DC 85~160V)

Oversvoltage 115-140% of rating

#### • 2 Year Warranty

- PART No. Description: VTB\_\_SC\_\_-O

↑ ↑  
Output Voltage Input Voltage (nominal)

**RoHS**

MODEL/CHANNEL		Unit	VTD**SC12-O	VTD**SC24-O	VTD**SC48-O	VTD**SC110-O
INPUT	Nominal Voltage	V	12	24	48	110
	Current Typ	A	15	10	4	1.4
	Inrush Current 12VDC 24VDC 48VDC 110VDC	VDC	65 (Ta=25°C, Io=100% at cold start) 65 (Ta=25°C, Io=100% at cold start) 65 (Ta=25°C, Io=100% at cold start) 40 (Ta=25°C, Io=100% at cold start)			

MODEL/CHANNEL		Unit	VTD05SC**-O	VTD12SC**-O	VTD15SC**-O	VTD24SC**-O
OUTPUT	Output Voltage	Vdc	5	12	15	24
	Voltage Range	V	4.95 ~ 5.05	11.88~12.12	14.85~15.15	23.76~24.24
	Current	A	20 18 for VTD05SC110	9	7	4.5
	Total Power	W	90~100	108	105	108
	Line Regulation	mV	25	60	75	120
	Load Regulation	mVp	50	120	150	240
	Efficiency	%	70	75	78	80
	Ripple	mVp-p	50	120	150	240
	Ripple and Noise	mVp-p	100	170	200	290
	OVP	V	5.75~7	13.8-16.8	17.25~21	26.4~33.6
	OCP	A	11~13	4.6~5.5	3.7~4.4	2.8~3.3
	Drift	mV	75	180	225	360
	Rise Time	-	500 max [DC IN 9V Io=100%]			
	Hold Time	-	10 typ [DC IN 9V Io=100%]			





VTD-SC


100W

	MODEL/CHANNEL	Unit	
<b>Environment</b>	Operating Temperature	°C	-10 ~ +50°C 20~90% RH(Non condensing)
	Storage Temperature	°C	-20 ~ +75°C 20~90% RH(Non condensing)
	Overvoltage Protection	V	Works at 115-140% of rating
	Overcurrent Protection	A	Works at over 110% of rating and recovers automatically
	Isolation Resistance Input-Output	-	AC 1.5KV 1 min. cut-off: 20mA,/DC 500V 100MΩ
	Isolation Resistance Input-F.G.	-	AC 1.5KV 1 min. cut-off: 20mA,/DC 500V 100MΩ
	Isolation Resistance Output-F.G.	-	AC 500V 1 min. cut-off:100mA, DC 500V 100MΩ
	Vibration	-	10 ~ 55Hz at 1G, 3 minutes period, 30 minutes along X, Y and Z axis
	Cooling	-	Convection
<b>Dimension</b>	Size(WxHxD) / Weight	mm/g	97x54x200/700







## Terminal Output

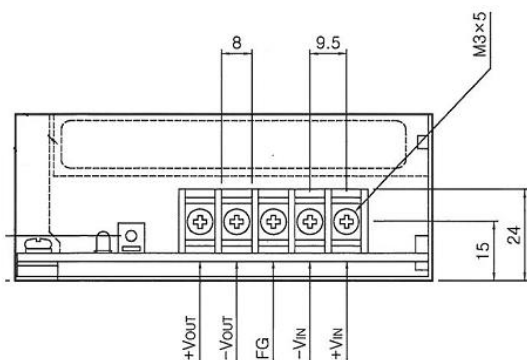

Mark	Pin Connection	Function
+Vin	DC Input (+)	DC Input Terminal (+) Fuse In Line
-VIN	DC Output (-)	DC Input Terminal (-)
F.G	Frame Ground	DC Ground Terminal/ Chassis Ground
+V	DC Output (+)	DC Output Terminal (+)
-V	DC Output (-)	DC Output Terminal (-)

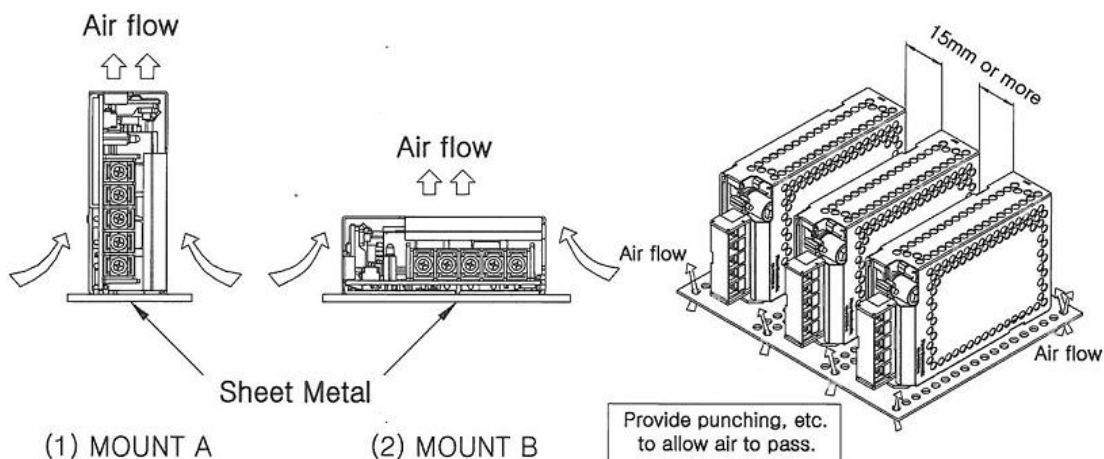


## Efficiency Curve

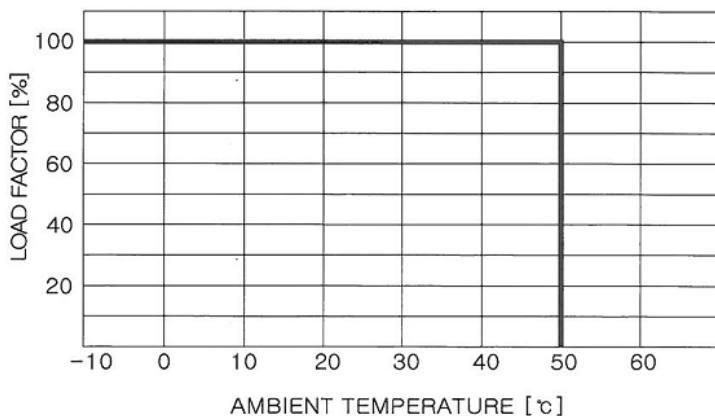




## Dimension Diagram (mm)

100W

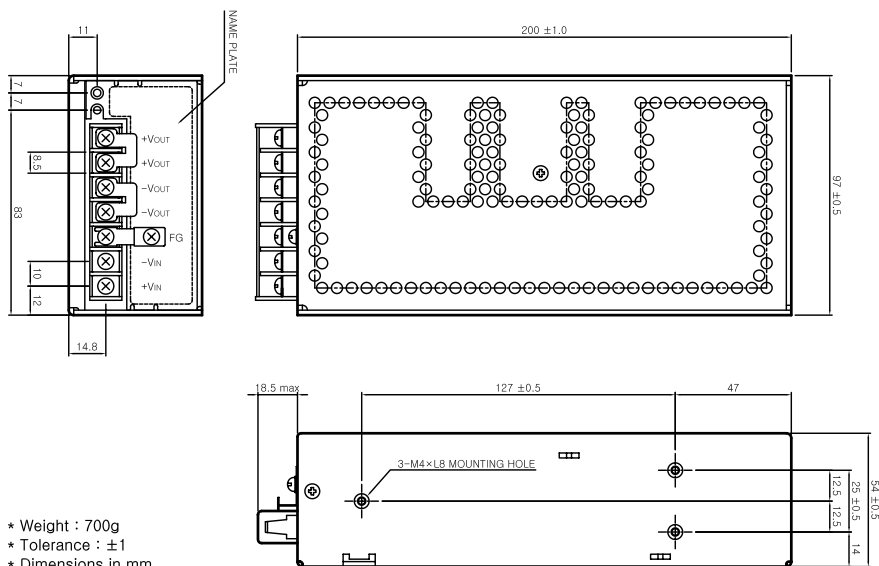

## Block Diagram

100W

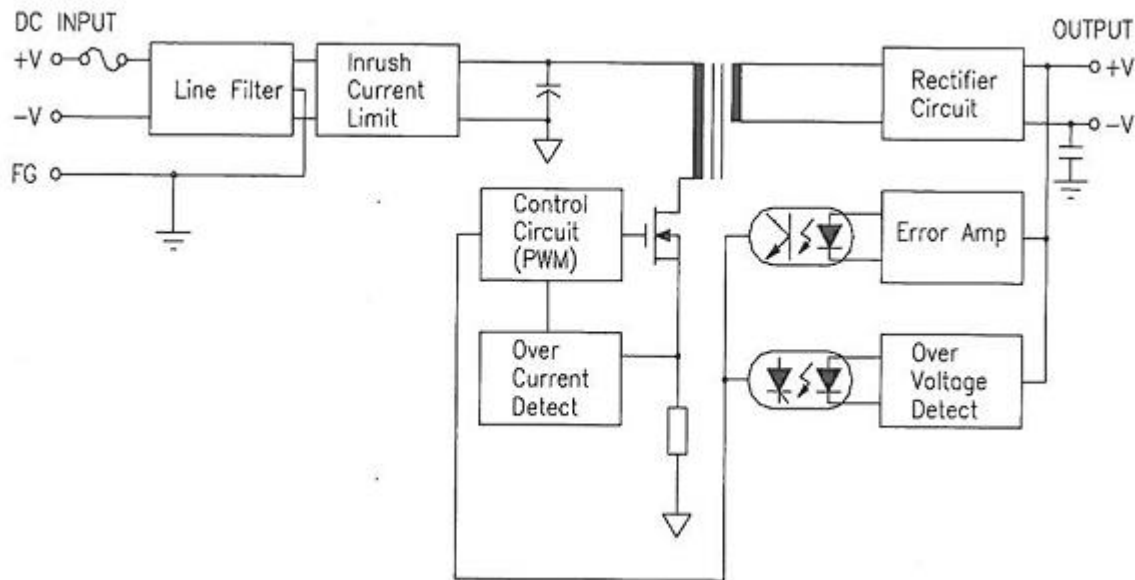

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters - Chassis Mount](#) category:*

*Click to view products by [ETA](#) manufacturer:*

Other Similar products are found below :

[RPS8-350ATX-XE](#) [AK-1615-7R](#) [EBC4050N042N75](#) [FK1601-7RT](#) [AM3040-9G](#) [BQ2660-9RF](#) [B62SR24125CC](#) [B40SR12424CC](#)  
[VTD24SC24-O](#) [VTB05SC110-O](#) [B62SR13722AC](#) [TMDC 20-4811](#) [TMDC 20-4815](#) [TMDC 40-2411](#) [TMDC 40-4811](#) [TMDC 60-2411](#)  
[TMDC 60-4815](#) [RSD-300D-5](#) [STMGFS152412](#) [TMDC 20-2411](#) [TMDC 20-2412](#) [TMDC 20-2418](#) [TMDC 60-4811](#) [TMDC 60-4812](#) [TMDC](#)  
[60-4818](#) [VHK150W-Q24-S48](#) [EQ2001-9RG](#) [SD-100A-12](#) [RSD-30G-3.3](#) [RSD-30H-3.3](#) [RSD-30H-5](#) [RSD-30L-3.3](#) [RSD-30L-5](#) [RSD-60G-5](#)  
[RSD-60H-24](#) [RSD-60H-3.3](#) [RSD-60H-5](#) [RSD-30G-5](#) [VHK200W-Q24-S12](#) [RSD-60L-5](#) [MGFS32412](#) [VHK150W-Q24-S12](#) [TEQ 300-](#)  
[7216WIR](#) [MGFS32415](#) [MGFS3243R3](#) [PS8-250ATX-ZE](#) [RPS8-750ATX-XE](#) [PS8-300ATX-ZBE](#) [RPM40-2412DG](#) [TEQ 300-7215WIR](#)