


## PC/104-Plus Switch with five 10/100MB Ethernet ports

# COM-1267

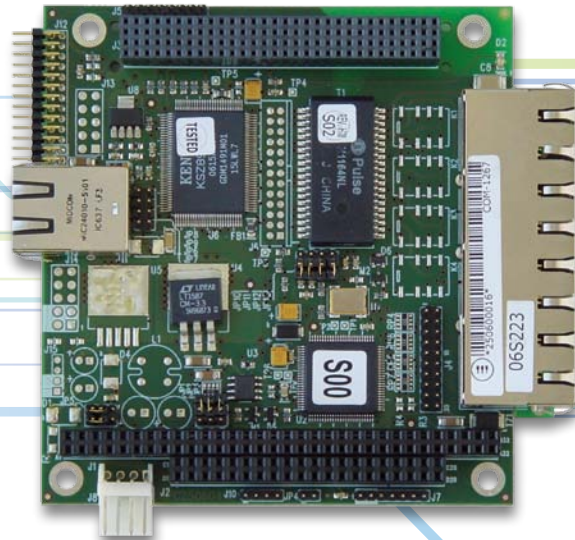

## FEATURES

### General Features:

- PC/104-Plus architecture. Can be also used in PC/104-only architectures or Standalone
- Integrated Five port 10/100 Mbps Ethernet Switch with Physical Layer Transceivers
- 64KB SRAM frame buffer
- 10BaseT and 100BaseTX operating modes
- Superior analog technology for reduced power consumption
- Features QoS for DiffServ priority, 802.1p based priority or port based priority support
- LED indicators for link, activity, full/half duplex and speed
- Unmanaged operation via EEPROM at system reset time
- Hardware based 10/100, full/half, flow control and auto negotiation
- Individual port forced modes (full duplex, 100BaseTX) when auto negotiation is disabled
- Integrated address Look-Up Engine, supports 1K absolute MAC address
- Automatic address learning, address aging and address migration
- Broadcast storm protection
- Full duplex IEEE 802.3x flow control
- Half duplex back pressure flow control
- Supports MDI / MDI-X auto crossover
- Fully RoHS (2002/95/CE) Compliant

### RoHS:

- Fully RoHS (2002/95/CE) Compliant

The COM-1267 can be used as a standalone module or integrated within a PC104 or PC104-Plus system together with a Eurotech CPU module.

Optionally the COM-1267 can feature a cross over connection between Ethernet ports 2 and 3 that can be activated via software, automatically activated when the board is powered off, or activated when a Watchdog signal is received from the host Eurotech CPU module.

Typical applications for the COM-1267 include remote data acquisition, machine monitoring, process control, environmental control, and communications gateways for factory automation, aerospace, telecom and transportation.

### Physical Characteristics

DIMENSIONS	• 90 x 96 mm (3.6" x 3.8")
HEIGHT	• 11 mm (0.4")
POWER SUPPLY	• Single +5V DC +/- 5%
POWER CONSUMPTION	• 600mA @ 5V
OPERATING TEMPERATURE	• 0 to +60 °C (standard) • -40 to +85 °C (extended)
HUMIDITY	• Up to 95% @ 40°C non-condensing

### Options

- Extended operating temperature range
- Conformal coating
- Custom Connectors

Note: The information in this document is subject to change without notice and should not be construed as a commitment by EUROTECH. While reasonable precautions have been taken, EUROTECH assumes no responsibility for any error that may appear in this document. All trademarks or registered trademarks are the properties of their respective companies.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Eurotech](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)  
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)  
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)  
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)  
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)  
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)