


## Technical Data Sheet

### 0.35mm Height Chip LED with Full Color

#### 19-337/R6GHBHC-M01/2T

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Full-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

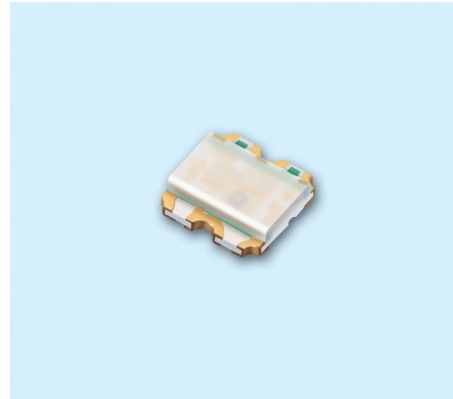

#### Descriptions

- The 19-337 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.




#### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.



#### Device Selection Guide

| Chip |          |                 | Resin Color |
|------|----------|-----------------|-------------|
| Type | Material | Emitted Color   |             |
| R6   | AlInGaN  | Brilliant Red   | Water Clear |
| GH   | InGaN    | Brilliant Green |             |
| BH   | InGaN    | Blue            |             |

### Package Outline Dimensions

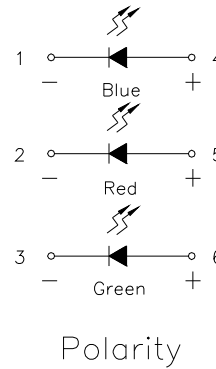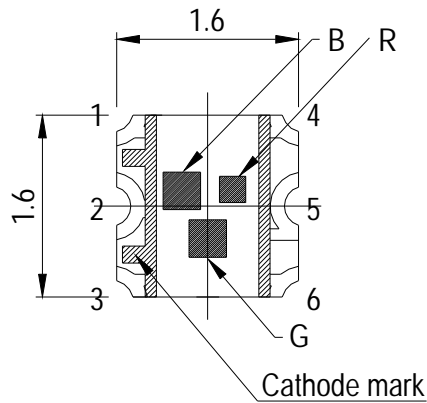

Recommend soldering pad

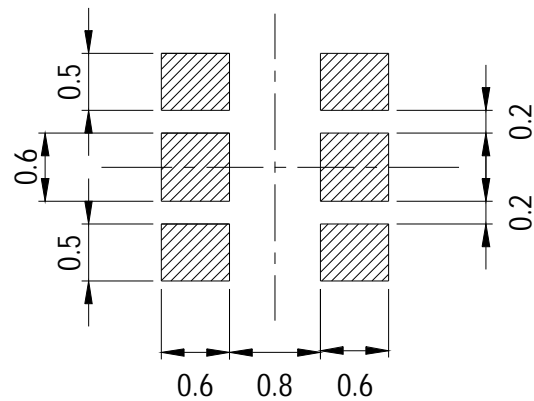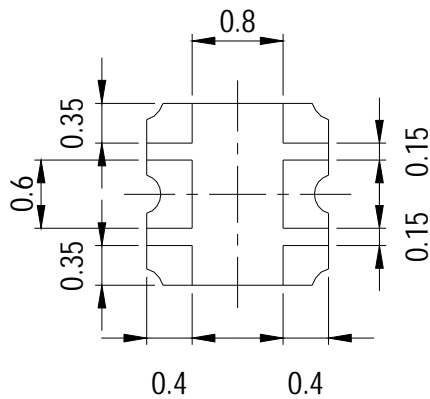

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### Absolute Maximum Ratings (Ta=25 )

| Parameter                                 | Symbol           | Rating   | Unit                      |
|---|------------------|--|---------------------------|
| Reverse Voltage                           | V <sub>R</sub>   | 5  | V                         |
| Forward Current                           | I <sub>F</sub>   | R6:25<br>GH:25<br>BH:25                        | mA                        |
| Peak Forward Current<br>(Duty 1/10 @1KHz) | I <sub>FP</sub>  | R6:60<br>GH:100<br>BH:100                      | mA                        |
| Power Dissipation                         | P <sub>d</sub>   | R6:60<br>GH:95<br>BH:95                        | mW                        |
| Electrostatic Discharge(HBM)              | ESD              | R6:2000<br>GH:150<br>BH:150                    | V                         |
| Operating Temperature                     | T <sub>opr</sub> | -40 ~ +85                                      |                           |
| Storage Temperature                       | T <sub>stg</sub> | -40 ~ +90                                      |                           |
| Soldering Temperature                     | T <sub>sol</sub> | Reflow Soldering : 260<br>Hand Soldering : 350 | for 10 sec.<br>for 3 sec. |

### Electro-Optical Characteristics (Ta=25 )

| Parameter                    | Symbol | Min.  | Typ.  | Max.  | Unit | Condition  |
|------------------------------|--------|-------|-------|-------|------|--|
| Luminous Intensity           | Iv     | 57.0  |       | 140   | mcd  |  |
| Viewing Angle                | 2 1/2  | ----- | 120   | ----- | deg  |  |
| Peak Wavelength              | R6     |       | 632   |       |      | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
|                              | GH     | ----- | 518   | ----- | nm   |  |
|                              | BH     |       | 468   |       |      |  |
| Dominant Wavelength          | R6     |       | 624   |       |      | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
|                              | GH     | ----- | 525   | ----- | nm   |  |
|                              | BH     |       | 470   |       |      |  |
| Spectrum Radiation Bandwidth | R6     |       | 20    |       |      |  |
|                              | GH     | ----- | 35    | ----- | nm   |  |
|                              | BH     |       | 35    |       |      |  |
| Forward Voltage              | R6     | 1.6   |       | 2.1   |      | V  |
|                              | GH     | 2.6   | ----- | 3.1   |      |  |
|                              | BH     | 2.6   |       | 3.0   |      |  |
| Reverse Current              | R6     |       |       | 10    |      | VR=5V  |
|                              | GH     | ----- | ----- | 50    | μ A  |  |
|                              | BH     |       |       | 50    |      |  |

\*When three LED dies are operated simultaneously.

### Notes:

**1.Tolerance of Luminous Intensity ±11%**

**2.Tolerance of Forward Voltage ±0.1V**

### Bin Range Of Luminous Intensity

| Bin | Min  | Max  | Unit | Condition  |
|-----|------|------|------|--|
| P1  | 45.0 | 57.0 | mcd  | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
| P2  | 57.0 | 72.0 |      |  |
| Q1  | 72.0 | 90.0 |      |  |
| Q2  | 90.0 | 112  |      |  |

\*When three LED dies are operated simultaneously.

### Notes:

- 1.Tolerance of Luminous Intensity  $\pm 11\%$

EVERLIGHT

### Chromaticity Coordinates Specifications for Bin Grading

| Bin Code | CIE_x | CIE_y | Condition  |
|----------|-------|-------|--|
| 180      | 0.257 | 0.220 | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
|          | 0.257 | 0.245 |  |
|          | 0.282 | 0.255 |  |
|          | 0.282 | 0.230 |  |
| 181      | 0.282 | 0.230 |  |
|          | 0.282 | 0.255 |  |
|          | 0.307 | 0.265 |  |
|          | 0.307 | 0.240 |  |
| 182      | 0.307 | 0.240 |  |
|          | 0.307 | 0.265 |  |
|          | 0.332 | 0.275 |  |
|          | 0.332 | 0.250 |  |
| 183      | 0.332 | 0.250 |  |
|          | 0.332 | 0.275 |  |
|          | 0.357 | 0.285 |  |
|          | 0.357 | 0.260 |  |
| PW 01    | 0.257 | 0.245 |  |
|          | 0.257 | 0.270 |  |
|          | 0.282 | 0.280 |  |
|          | 0.282 | 0.255 |  |
| PW 02    | 0.282 | 0.255 |  |
|          | 0.282 | 0.280 |  |
|          | 0.307 | 0.290 |  |
|          | 0.307 | 0.265 |  |

## 19-337/R6GHBHC-M01/2T

| Bin Code | CIE_x | CIE_y | Condition  |
|----------|-------|-------|--|
| PW 03    | 0.307 | 0.265 | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
|          | 0.307 | 0.290 |  |
|          | 0.332 | 0.300 |  |
|          | 0.332 | 0.275 |  |
| PW 04    | 0.332 | 0.275 |  |
|          | 0.332 | 0.300 |  |
|          | 0.357 | 0.310 |  |
|          | 0.357 | 0.285 |  |
| PW 05    | 0.257 | 0.270 |  |
|          | 0.257 | 0.295 |  |
|          | 0.282 | 0.305 |  |
|          | 0.282 | 0.280 |  |
| PW 06    | 0.282 | 0.280 |  |
|          | 0.282 | 0.305 |  |
|          | 0.307 | 0.315 |  |
|          | 0.307 | 0.290 |  |
| PW 07    | 0.307 | 0.290 |  |
|          | 0.307 | 0.315 |  |
|          | 0.332 | 0.325 |  |
|          | 0.332 | 0.300 |  |
| PW 08    | 0.332 | 0.300 |  |
|          | 0.332 | 0.325 |  |
|          | 0.357 | 0.335 |  |
|          | 0.357 | 0.310 |  |

| Bin Code | CIE_x | CIE_y | Condition  |
|----------|-------|-------|--|
| Pw09     | 0.257 | 0.295 | R6 : IF=5.1mA<br>GH : IF=3.5mA<br>BH : IF=2.45mA |
|          | 0.257 | 0.320 |  |
|          | 0.282 | 0.330 |  |
|          | 0.282 | 0.305 |  |
| PW 10    | 0.282 | 0.305 |  |
|          | 0.282 | 0.330 |  |
|          | 0.307 | 0.340 |  |
|          | 0.307 | 0.315 |  |
| PW 11    | 0.307 | 0.315 |  |
|          | 0.307 | 0.340 |  |
|          | 0.332 | 0.350 |  |
|          | 0.332 | 0.325 |  |
| PW 12    | 0.332 | 0.325 |  |
|          | 0.332 | 0.350 |  |
|          | 0.357 | 0.360 |  |
|          | 0.357 | 0.335 |  |


**\*When three LED dies are operated simultaneously.**

Notes:

- 1.The C.I.E. 1931 chromaticity diagram ( Tolerance  $\pm 0.01$ ).
- 2.The products are sensitive to static electricity and care must be fully taken when handling products









### CIE Chromaticity Diagram

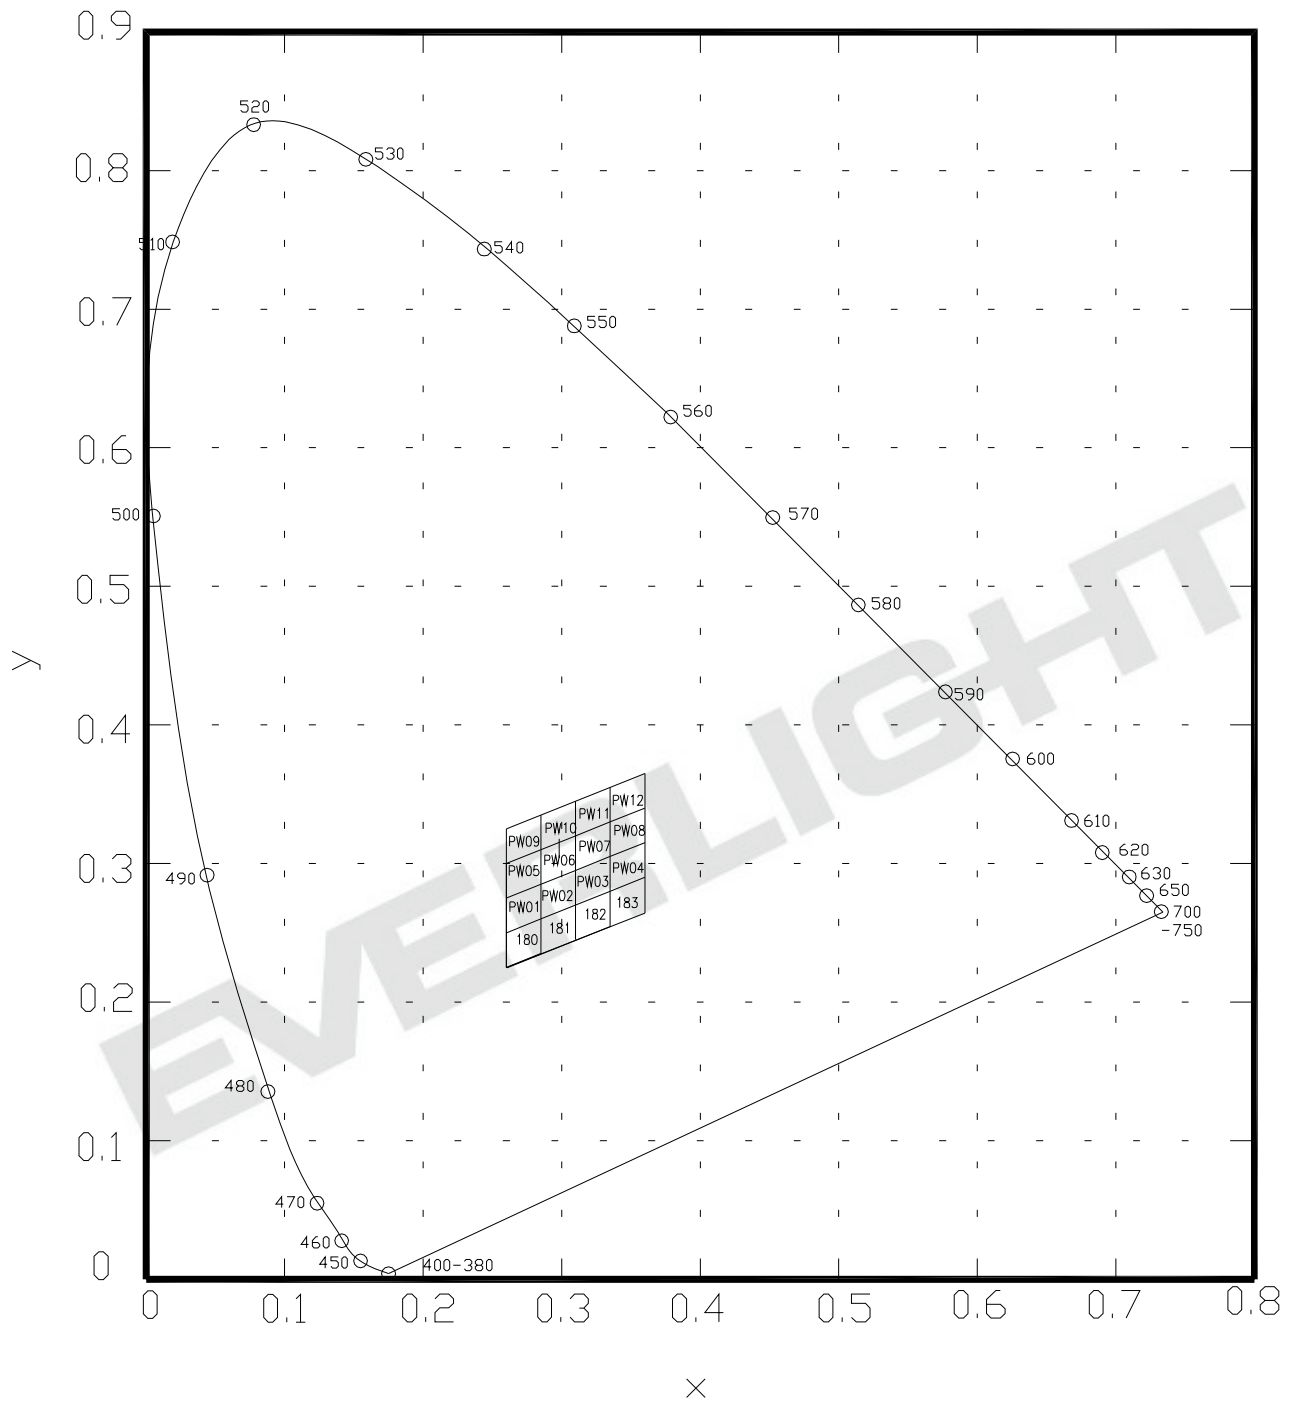







### Typical Electro-Optical Characteristics Curves

#### R6

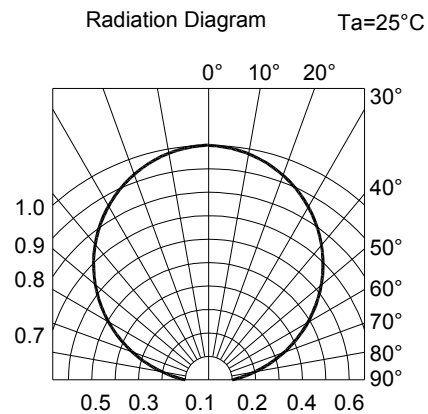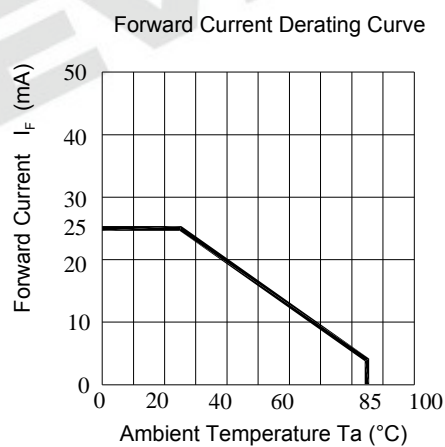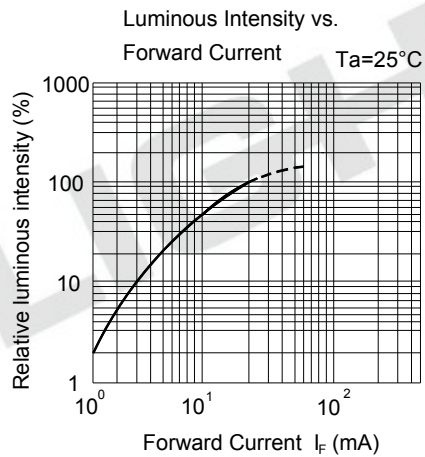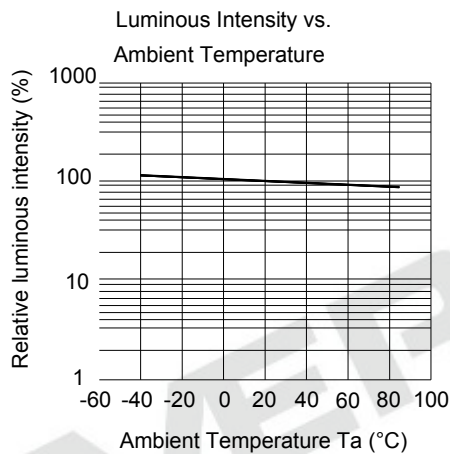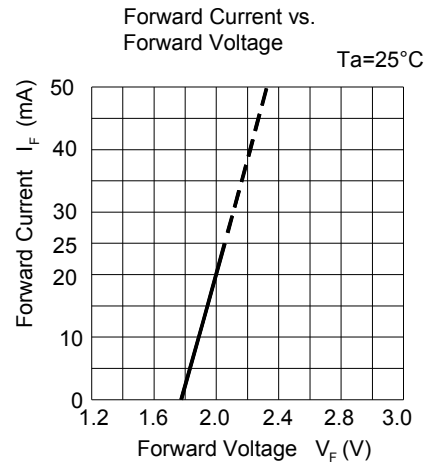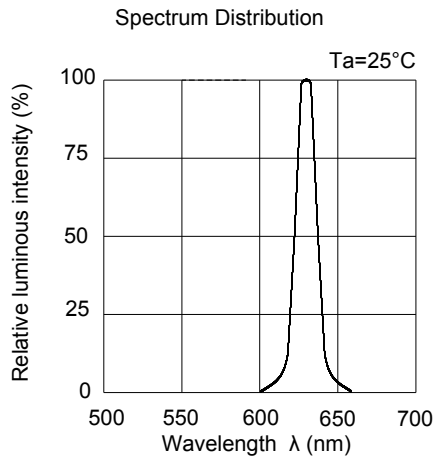







### Typical Electro-Optical Characteristics Curves

**GH**

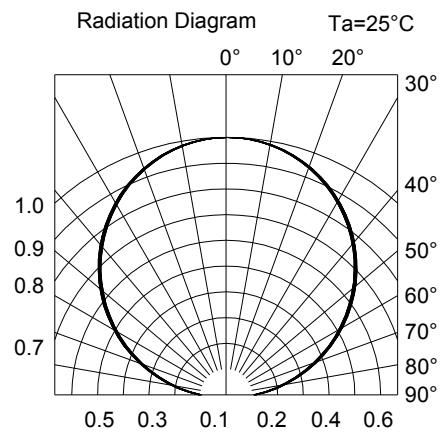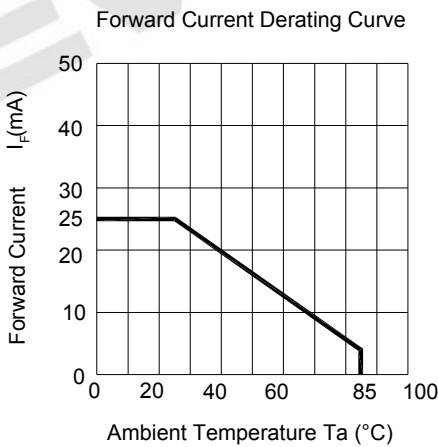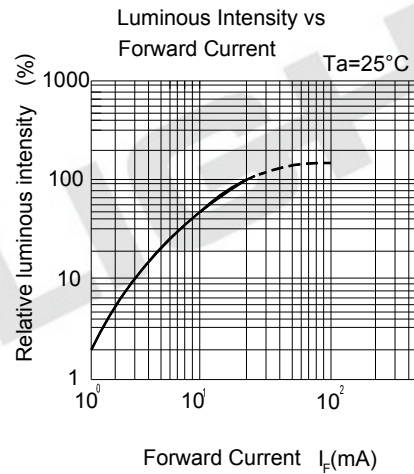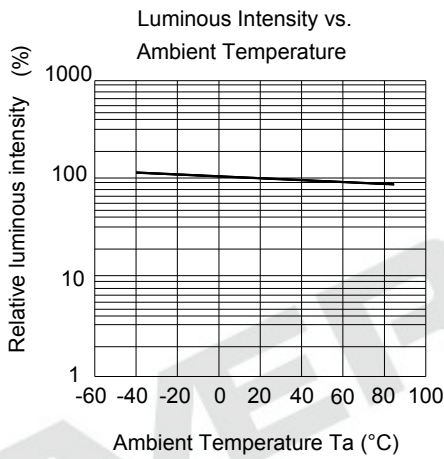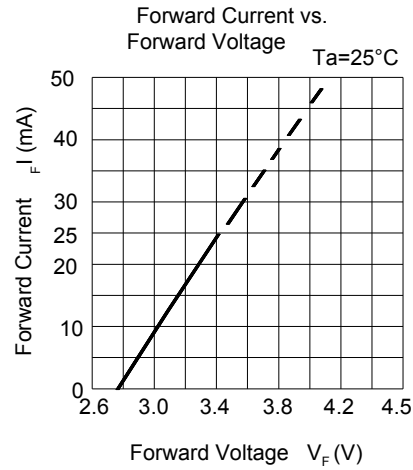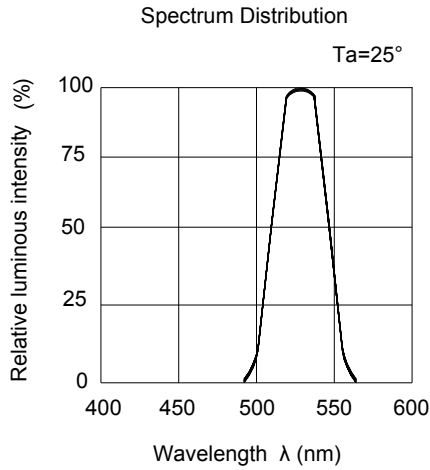

### Typical Electro-Optical Characteristics Curves

**BH**

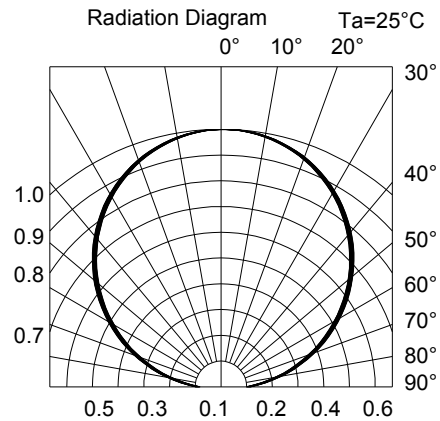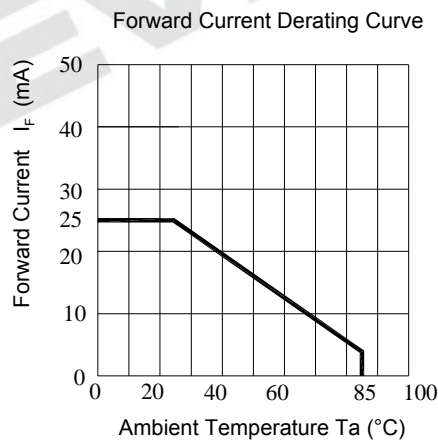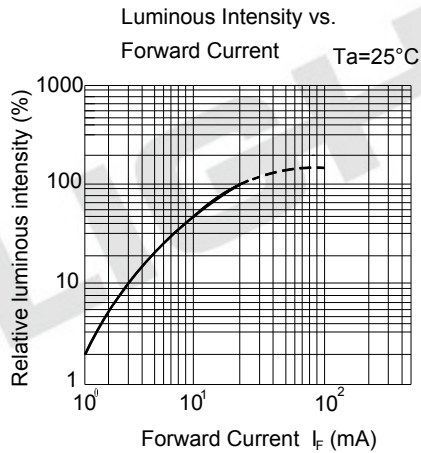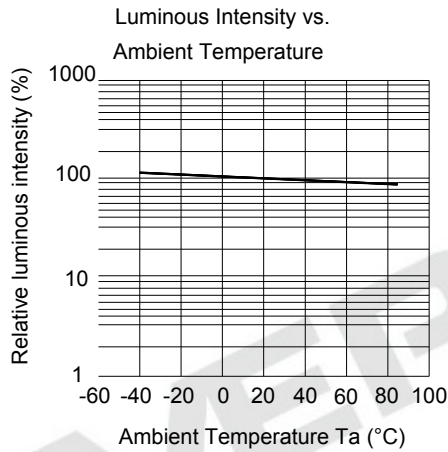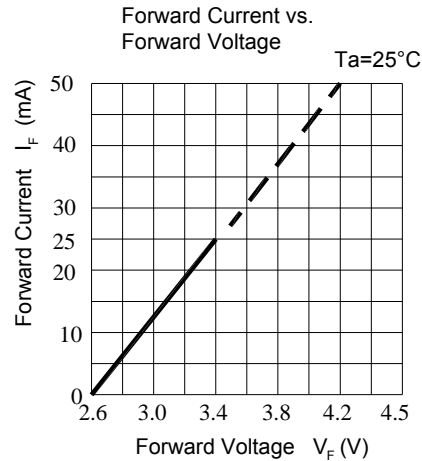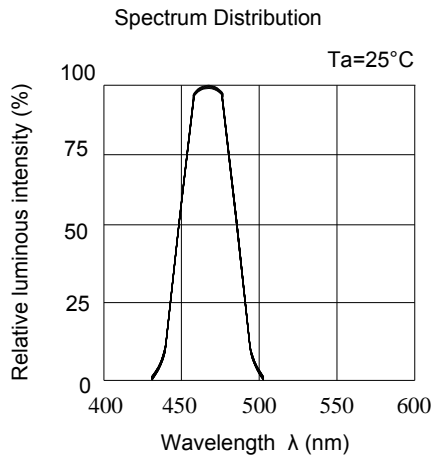

### Label Explanation


**CAT:** Luminous Intensity Rank

**HUE:** Chromaticity Coordinates

**REF:** Forward Voltage Rank




### Reel Dimensions

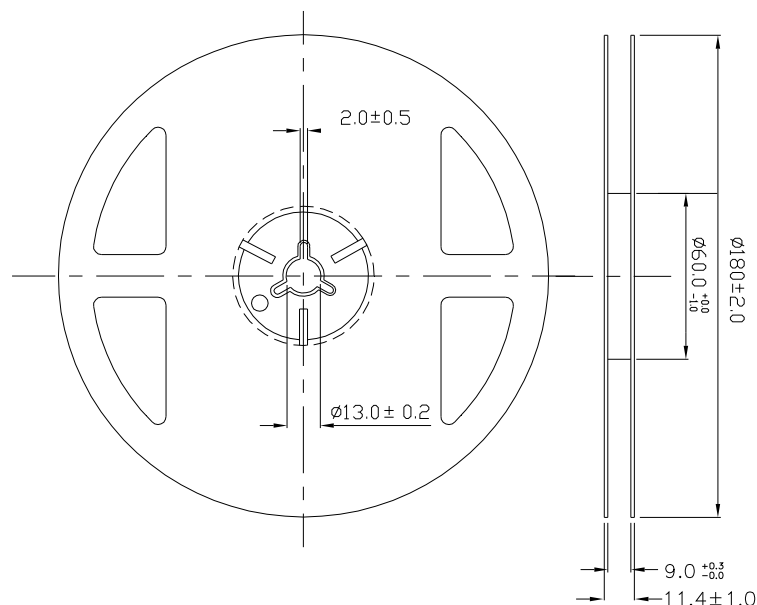


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

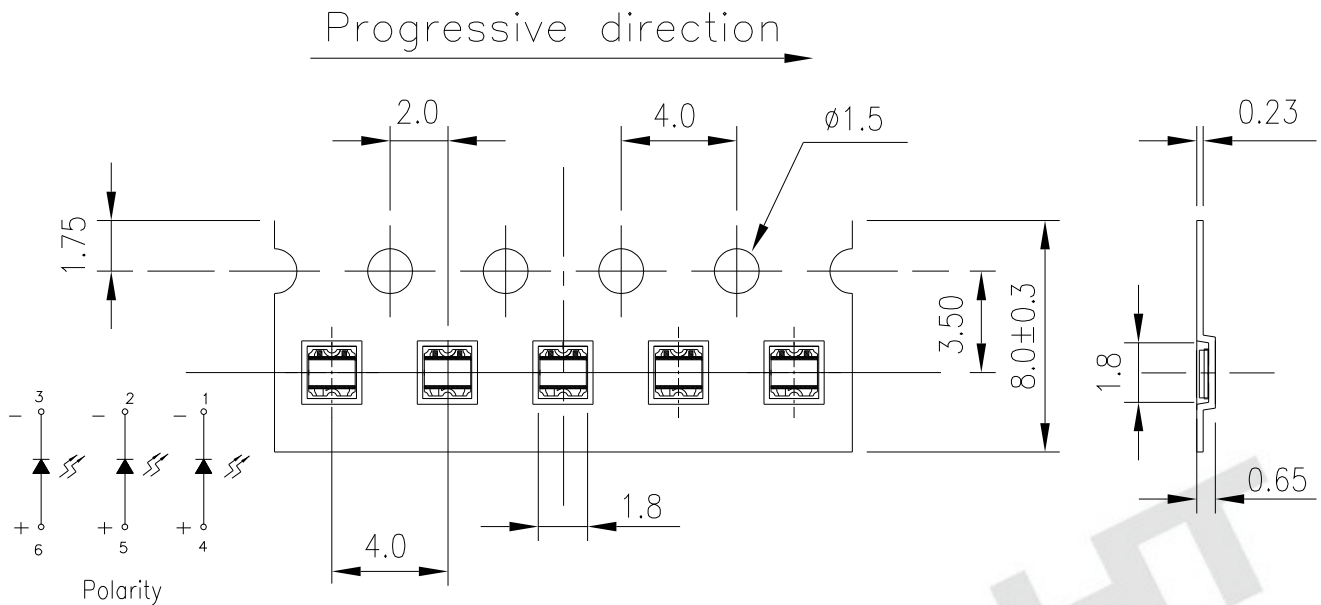

**Note:** The tolerances unless mentioned is  $\pm 0.1\text{mm}$ , Unit = mm

### Moisture Resistant Packaging

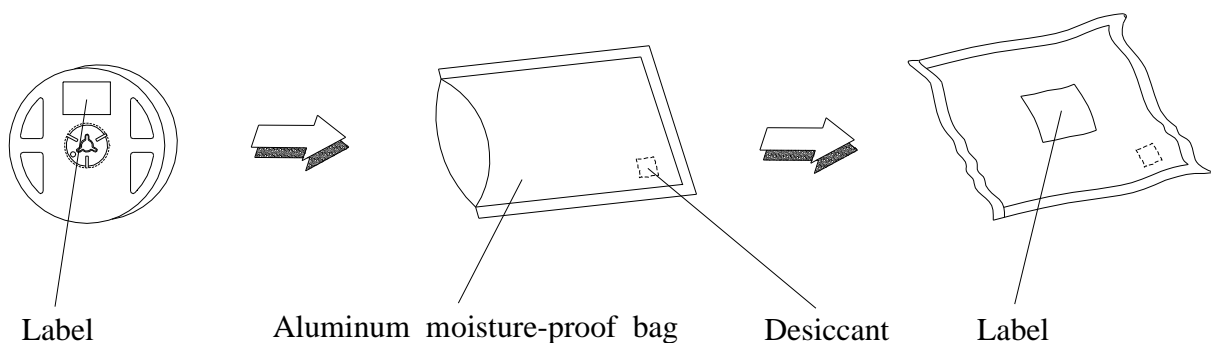

### Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| No. | Items                            | Test Condition                           | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|----------------------------------|--|-------------------|-------------|-------|
| 1   | Reflow Soldering                 | Temp. : 260 ±5<br>Max. 10sec.            | 6 Min.            | 22 PCS.     | 0/1   |
| 2   | Temperature Cycle                | H : +100 15min<br>5 min<br>L : -40 15min | 300 Cycles        | 22 PCS.     | 0/1   |
| 3   | Thermal Shock                    | H : +100 5min<br>10 sec<br>L : -10 5min  | 300 Cycles        | 22 PCS.     | 0/1   |
| 4   | High Temperature Storage         | Temp. : 100                              | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 5   | Low Temperature Storage          | Temp. : -40                              | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 6   | DC Operating Life                | IF = 20 mA                               | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 7   | High Temperature / High Humidity | 85 / 85%RH                               | 1000 Hrs.         | 22 PCS.     | 0/1   |

### Precautions For Use

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

#### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm 5$  for 24 hours.

#### 3. Soldering Condition

##### 3.1 Pb-free solder temperature profile

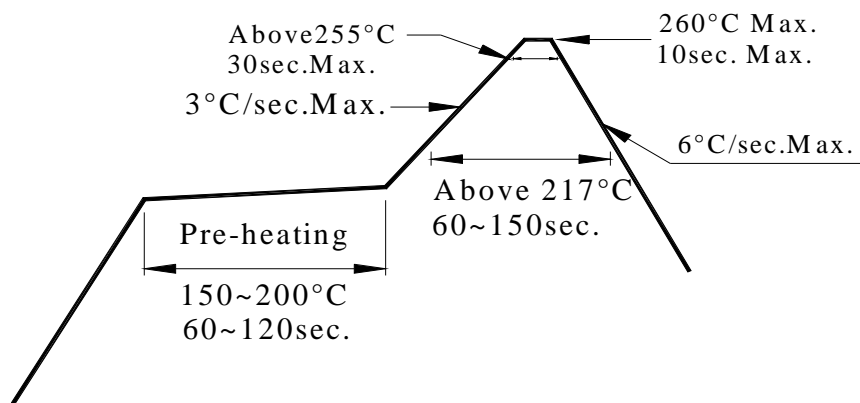

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.




### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

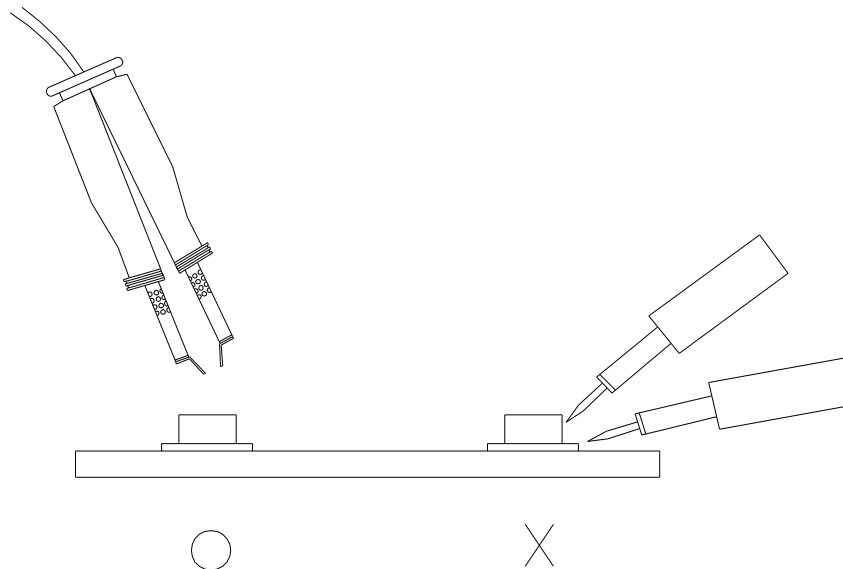

**EVERLIGHT ELECTRONICS CO., LTD.**  
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936  
Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - SMD category](#):*

*Click to view products by [Everlight manufacturer](#):*

Other Similar products are found below :

[LTST-C190KYKT](#) [LTST-C19GD2WT](#) [LTST-N683GBEW](#) [LTW-170ZDC](#) [LTW-M140SZS40](#) [598-8110-100F](#) [598-8170-100F](#) [598-8610-202F](#) [AAAF5060QBFSEEZGS](#) [HLMA-QG00-S0021](#) [ALMD-LB36-SV002](#) [APT1608QGW](#) [EAST2012YA0](#) [EASV1803BA0](#) [LG M67K-H1J2-24-0-2-R18-Z](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#) [LT1ED53A](#) [AM27ZGC03](#) [APB3025SGNC](#) [APFA3010SURKCGKQBDC](#) [APHK1608VGCA](#) [APT2012QGW](#) [CLX6D-FKB-CN1R1H1BB7D3D3](#) [LTST-008BGEW](#) [LTST-C250KGKT](#) [LTW-010DCG](#) [LTW-020ZDCG](#) [LTW-21TS5](#) [LTW-220DS5](#) [598-8330-117F](#) [SML-LX0402IC-TR](#) [CMDA20AYAA7D1S](#) [CMDA16AYDR7A1X](#) [91-21SYGD/S530-E2/TR7](#) [598-8040-100F](#) [598-8070-100F](#) [598-8140-100F](#) [598-8610-200F](#) [EAST2012GA0](#) [SML-LXL1209SYC/ATR](#) [EAST2012RA0](#) [EAST1608RGBAO](#) [CMD91-21VRC/TR7](#) [SML-LXR851SGSIC-TR](#) [SML-512PWT86A](#) [SMF-2432GYC-TR](#) [HSMQ-C197](#)