EVERLIGHT ELECTRONICS CO,,LTD.

Device Number : DLE-026-328 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO : 264-7UYOC/S530-A3 ECN : Page: 1/4

Features :

- High luminous power.
- Can be driven at low current.
- 2.54mm lead spacing.
- Available on tape and reel.

Description :

- The series is specially designed for applications require higher brightness than that achievable with standard lamp.
- The LED lamps are available with different colors,intensities, epoxy colors, etc.

Package Dimension:

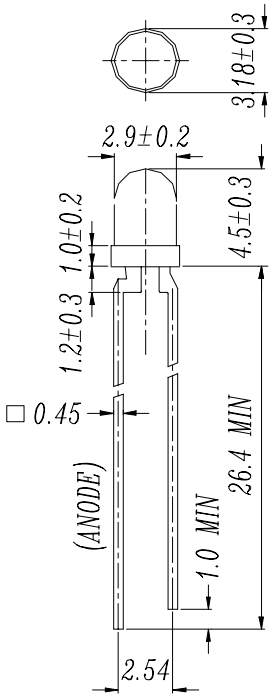

Applications :

- TV Set
- Monitor
- Telephone
- Computer

NOTES :

1.All dimensions are in millimeters.
2.An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
264-7UYOC/S530-A3	AlGaInP	Super Yellow Orange	Water Clear

DESIGNER	CHECKER	APPROVER

Office : NO 25,Lane 76,Chung Yang Rd,Sec.3
Tucheng,Taipei 236,Taiwan,R.O.C.

TEL : 886-2-2267-2000,2267-9936(22 Lines)
FAX : 886-2-2267-6189

EVERLIGHT ELECTRONICS CO,,LTD.

Device Number : DLE-026-328 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO : 264-7UYOC/S530-A3 ECN : Page: 2/4

■ Absolute Maximum Ratings at T_A = 25℃

Parameter	Symbol	Rating	Unit
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	℃
Storage Temperature	Tstg	-40 to +100	℃
Soldering Temperature	Tsol	260 ± 5	℃
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA
Reverse Voltage	Vr	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	----- 110	12 200	-----	mcd	If=2mA If=20mA
Viewing Angle	2 θ 1/2	-----	40	----	deg	If=20mA
Peak Wavelength	λ p	----	611	----	nm	If=20mA
Dominant Wavelength	λ d	----	605	-----	nm	If=20mA
Spectrum Radiation Bandwidth	$\triangle\lambda$	----	17	----	nm	If=20mA
Forward Voltage	Vf	-----	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V

■ Typical Electro-Optical Characteristic Curves

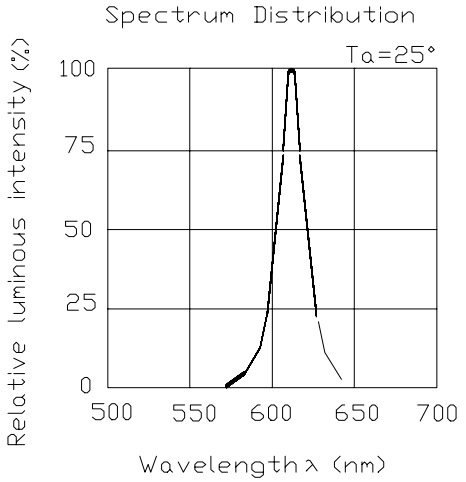

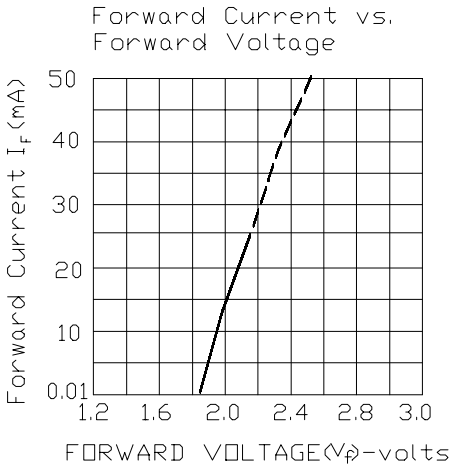

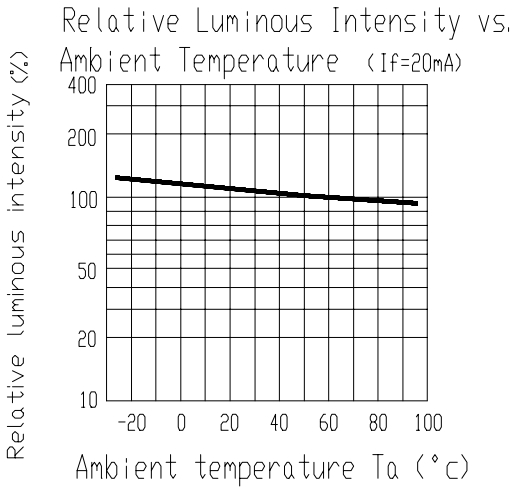

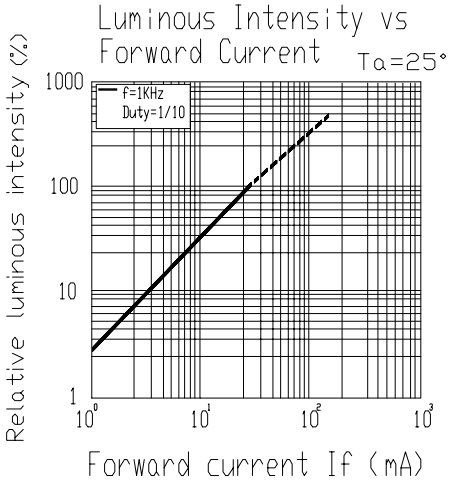

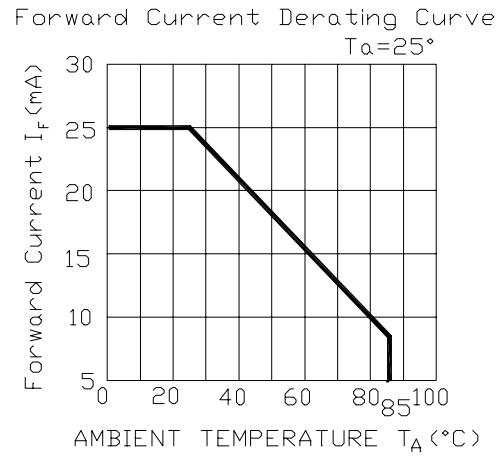

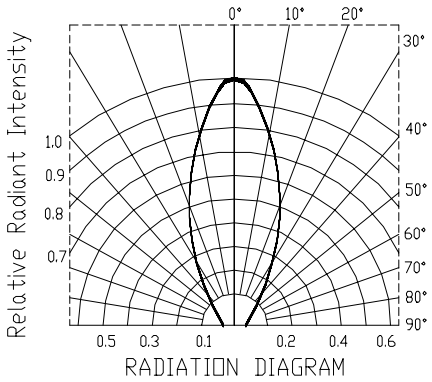

EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-026-328 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO 264-7UYOC/S530-A3 ECN : Page: 4/4

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Soldering Heat	TEMP : 260℃ ± 5 ℃	10±1 SEC	76 Pcs	0/1
2	Solderability	TEMP : 230℃ ± 5 ℃	5±1 SEC	76 Pcs	0/1
3	Temperature Cycle	H : +85℃ 30min ∫ 5 min L : -55℃ 30min	50 CYCLE	76 Pcs	0/1
4	Thermal Shock	H : +100℃ 5min ∫ 10 sec L : -10℃ 5min	50 CYCLE	76 Pcs	0/1
5	High Temperature Storage	TEMP : 100℃	1000 HRS	76 Pcs	0/1
6	Low Temperature Storage	TEMP : -55℃	1000 HRS	76 Pcs	0/1
7	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
8	High Temperature / High Humidity	85℃/85% RH	1000 HRS	76 Pcs	0/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole ***category:***

Click to view products by Everlight ***manufacturer:***

Other Similar products are found below :

LTL-10254W LTL-1214A LTL-2231AT LTL-3251A LTL-4262N LTL-433P LTL-5234 LTL87HTBK LTW-87HD4B HLMP-EL30-PS0DD 1L0532V23G0TD001 NSPW500CS LD CQDP-1U3U-W5-1-K LP379PPG1C0G0300001 SLR-342MC3F SLX-LX3044GD SLX-LX3044ID SLX-LX3044YD 1.90690.3330000 SSS-LX4673ID-410B 1L0532Y24I0TD001 264-7SYGD/S530-E2 HLMP-1301-G00FG HLMP1385 LTL-10224W LTL-1224A LTL-1234A LTL-2251AT LTL-403HR LTL-4222 LU7-E-B 4380H1 HLMP-3962-F0002 HLMP-GG15-R0000 323-2SURD/S530-A3 L53SRC/E-Z L-7679C1ZGC 4302T1-5V 4306D23 4363D1/5 WP1503SRC/J4 WP153YDT WP1543SGC WP1543SURC WP53MGD WP7113HD WP7113MBD WP7113MGC WP7143SEC/H Z-221A