



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-694 REV.: 2

5.0mm Round Type LED Lamps

PART NO. : 333-2SYGD/S530-E2

ECN: \_\_\_\_\_

Page: 1/4

### ■ Features :

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust


### ■ Descriptions :

- The series is specially designed for applications requiring higher brightness
- The led lamps are available with different colors, intensities,

### ■ Applications :

- TV set
- Monitor
- Telephone
- Computer

### ■ Package Dimensions:

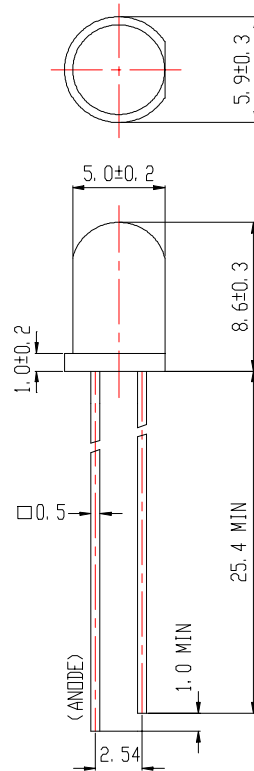

### ■ Notes :

1. All dimensions are in millimeters.
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
3. Tolerances unless Dimension ±0.25mm.

PART NO.	Chip		Lens Color
	Material	Emitted Color	
333-2SYGD/S530-E2	AlGaInP	Super Yellow Green	Green Diffused

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan  
 Bonded Processing Zone Pan Yu, Guang Zhou, China  
 TEL. : (020)84860913,84860914  
 FAX : (020)84860600  
 http : //www.everlight.com

T00561,C89113124



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-694 REV.: 2

5.0mm Round Type LED Lamps

PART NO. : 333-2SYGD/S530-E2 ECN: \_\_\_\_\_ Page: 2/4

## Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	I <sub>F</sub>	25	mA
Operating Temperature	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +100	°C
Soldering Temperature	T <sub>sol</sub>	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P <sub>d</sub>	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	I <sub>F(Peak)</sub>	160	mA
Reverse Voltage	V <sub>R</sub>	5	V

## Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I <sub>v</sub>	40	80	/	mcd	I <sub>F</sub> = 20 mA
Viewing Angle	2θ 1/2	/	30	/	deg	I <sub>F</sub> = 20 mA
Peak Wavelength	λ <sub>p</sub>	/	575	/	nm	I <sub>F</sub> = 20 mA
Dominant Wavelength	λ <sub>d</sub>	/	573	/	nm	I <sub>F</sub> = 20 mA
Spectrum Radiation Bandwidth	△λ	/	20	/	nm	I <sub>F</sub> = 20 mA
Forward Voltage	V <sub>F</sub>	/	2.0	2.4	V	I <sub>F</sub> = 20 mA
Reverse Current	I <sub>R</sub>	/	/	10	μA	V <sub>R</sub> = 5 V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-694 REV.: 2







5.0mm Round Type LED Lamps

PART NO. : 333-2SYGD/S530-E2

ECN : \_\_\_\_\_ Page: 3/4

## ■ Typical Electro-Optical Characteristic Curves:

(SYG)

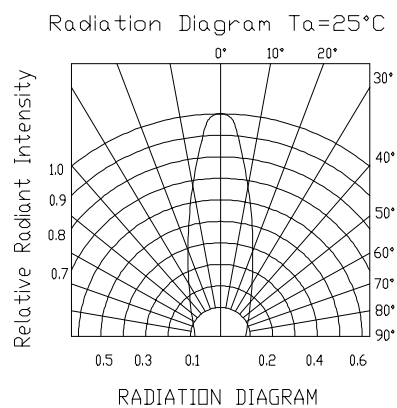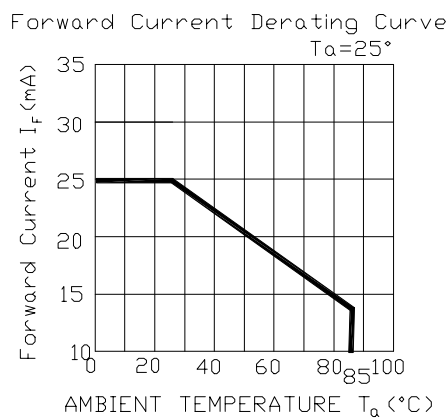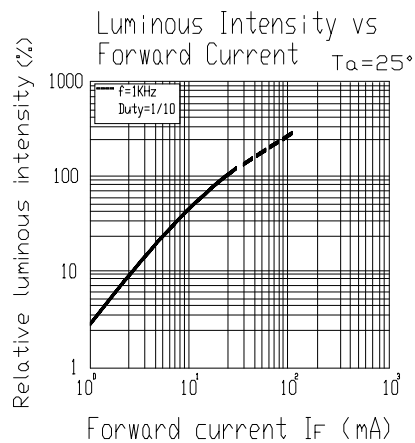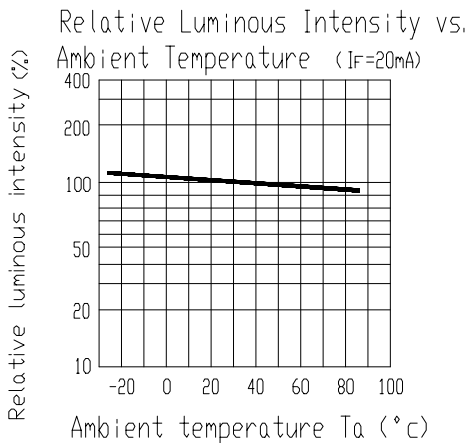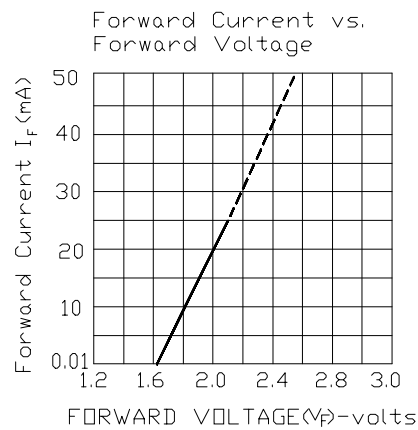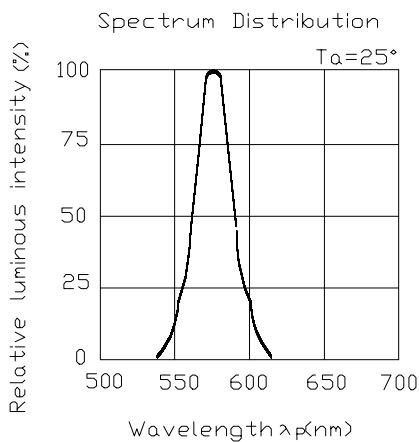



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-033-694 REV.: 2

5.0mm Round Type LED Lamps

PART NO. : 333-2SYGD/S530-E2 ECN : \_\_\_\_\_ Page: 4/4

## ■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle		Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C IF = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS	0/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category:](#)*

*Click to view products by [Everlight manufacturer:](#)*

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#) [LTL-87HD4B](#) [HLMP-EL30-PS0DD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [LD CQDP-1U3U-W5-1-K](#) [LP379PPG1C0G0300001](#) [SLR-342MC3F](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#) [HLMP-1301-G00FG](#) [HLMP1385](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-1234A](#) [LTL-2251AT](#) [LTL-403HR](#) [LTL-4222](#) [LU7-E-B](#) [4380H1](#) [HLMP-3962-F0002](#) [HLMP-GG15-R0000](#) [323-2SURD/S530-A3](#) [L53SRC/E-Z](#) [L-7679C1ZGC](#) [4302T1-5V](#) [4306D23](#) [4363D1/5](#) [WP1503SRC/J4](#) [WP153YDT](#) [WP1543SGC](#) [WP1543SURC](#) [WP53MGD](#) [WP7113HD](#) [WP7113MBD](#) [WP7113MGC](#) [WP7143SEC/H](#) [Z-221A](#)