



### 4 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER EL2514-G Series

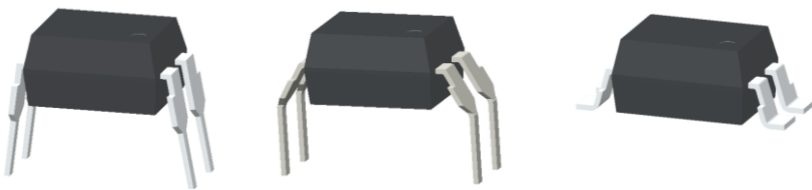

Schematic



#### Features:

- Halogens free.  
(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- Current transfer ratio(CTR: 50~200% at  $I_F = 5\text{mA}$ ,  $V_{CE} = 5\text{V}$ ,  $T_A = 25^\circ\text{C}$ )
- High isolation voltage between input and output ( $V_{iso} = 5000\text{Vrms}$ )
- High-Speed switching ( $t_{on} \leq 25 \mu\text{s}$  at  $I_F=5\text{mA}$ ,  $V_{CC}=5\text{V}$ ,  $R_L=5\text{k}\Omega$ ,  $T_A = 25^\circ\text{C}$ )  
( $t_{off} \leq 25 \mu\text{s}$  at  $I_F=5\text{mA}$ ,  $V_{CC}=5\text{V}$ ,  $R_L=5\text{k}\Omega$ ,  $T_A = 25^\circ\text{C}$ )
- Creepage distance > 7.62mm
- Operating temperature up to  $+110^\circ\text{C}$
- Compact small outline package
- Compliance with EU REACH
- The product itself will remain within RoHS compliant version
- UL and cUL (No.E214129)
- VDE approved (No.132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

#### Pin Configuration

1. Anode
2. Cathode
3. Emitter
4. Collector

#### Description

The EL2514-G series of devices each consist of an infrared emitting diodes, optically coupled to a phototransistor detector. The EL2514-G has enabled relatively high switching speed with high load resistor of several k $\Omega$ . They are packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

#### Applications

- Programmable controllers
- System appliances, measuring instruments
- Electronic electricity meter
- Telecommunication equipments
- Power supply

### Absolute Maximum Ratings (Ta=25°C)

|        | Parameter                           | Symbol           | Rating      | Unit             |
|--------|-------------------------------------|------------------|-------------|------------------|
| Input  | Forward Current                     | I <sub>F</sub>   | 50          | mA               |
|        | Peak Forward Current (1μs, pulse)   | I <sub>FP</sub>  | 0.5         | A                |
|        | Reverse Voltage                     | V <sub>R</sub>   | 6           | V                |
| Output | Collector Current                   | I <sub>C</sub>   | 20          | mA               |
|        | Collector-Emitter Voltage           | V <sub>CEO</sub> | 40          | V                |
|        | Emitter-Collector Voltage           | V <sub>ECO</sub> | 0.45        | V                |
|        | Total Power Dissipation             | P <sub>TOT</sub> | 200         | mW               |
|        | Isolation Voltage* <sup>1</sup>     | V <sub>ISO</sub> | 5000        | V <sub>rms</sub> |
|        | Operating Temperature               | T <sub>OPR</sub> | -55 to +110 | °C               |
|        | Storage Temperature                 | T <sub>STG</sub> | -55 to +125 | °C               |
|        | Soldering Temperature* <sup>2</sup> | T <sub>SOL</sub> | 260         | °C               |

Notes:

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

\*2 For 10 seconds

### Recommended Operating Conditions

| Parameter     | Symbol         | Min. | Typ. | Max. | Unit |
|---------------|----------------|------|------|------|------|
| Input Current | I <sub>F</sub> | 5    | 6    | 7    | mA   |

**Electro-Optical Characteristics (Ta=25°C unless specified otherwise)**

**Input**

| Parameter         | Symbol          | Min. | Typ. | Max. | Unit | Condition             |
|-------------------|-----------------|------|------|------|------|-----------------------|
| Forward Voltage   | V <sub>F</sub>  | -    | 1.2  | 1.4  | V    | I <sub>F</sub> = 20mA |
| Reverse Current   | I <sub>R</sub>  | -    | -    | 10   | μA   | V <sub>R</sub> = 4V   |
| Input Capacitance | C <sub>in</sub> | -    | 30   | 250  | pF   | V = 0, f = 1kHz       |

**Output**

| Parameter                           | Symbol            | Min  | Typ. | Max. | Unit | Condition                                   |
|-------------------------------------|-------------------|------|------|------|------|---|
| Collector-Emitter Dark Current      | I <sub>CEO</sub>  | -    | -    | 100  | nA   | V <sub>CE</sub> = 10V, I <sub>F</sub> = 0mA |
| Collector-Emitter Breakdown Voltage | BV <sub>CEO</sub> | 40   | -    | -    | V    | I <sub>C</sub> = 0.1mA                      |
| Emitter-Collector Breakdown Voltage | BV <sub>ECO</sub> | 0.45 | -    | -    | V    | I <sub>E</sub> = 0.1mA                      |

**Transfer Characteristics**

| Parameter                            | Symbol               | Min                | Typ. | Max. | Unit | Condition                                    |
|--------------------------------------|----------------------|--------------------|------|------|------|--|
| Current Transfer Ratio               | CTR                  | 50                 | -    | 200  | %    | I <sub>F</sub> = 5mA, V <sub>CE</sub> = 5V   |
| Collector-Emitter Saturation Voltage | V <sub>CE(sat)</sub> | -                  | -    | 0.35 | V    | I <sub>F</sub> = 5mA, I <sub>C</sub> = 0.4mA |
| Isolation Resistance                 | R <sub>IO</sub>      | 5×10 <sup>10</sup> | -    | -    | Ω    | V <sub>IO</sub> = 500Vdc, 40~60% R.H.        |
| Floating Capacitance                 | C <sub>IO</sub>      | -                  | 0.6  | 1.0  | pF   | V <sub>IO</sub> = 0, f = 1MHz                |
| Turn-on Time                         | t <sub>on</sub>      | -                  | -    | 25   | μs   | V <sub>CC</sub> = 5V, I <sub>F</sub> = 5mA,  |
| Turn-off Time                        | t <sub>off</sub>     | -                  | -    | 25   | μs   | R <sub>L</sub> = 5kΩ                         |

\* Typical values at T<sub>a</sub> = 25°C

Typical Electro-Optical Characteristics Curves

Figure 1. Forward Current vs. Forward Voltage

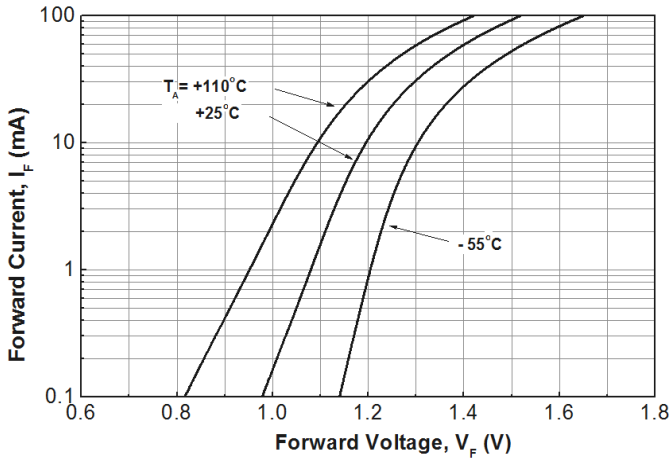


Figure 2. Current Transfer Ratio vs Forward Current

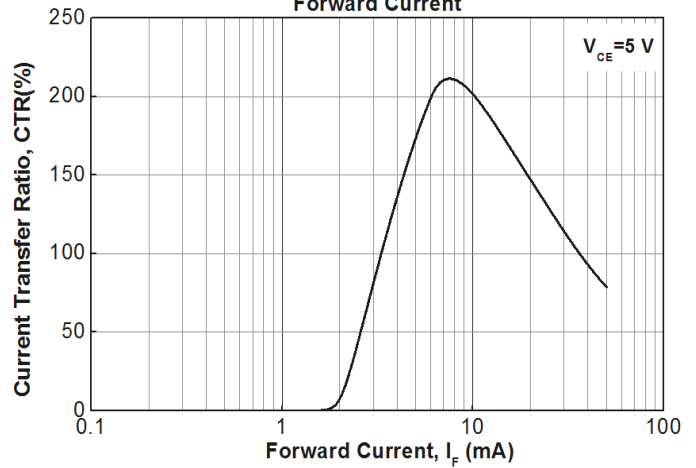


Figure 3. Current Transfer Ratio vs Ambient Temperature

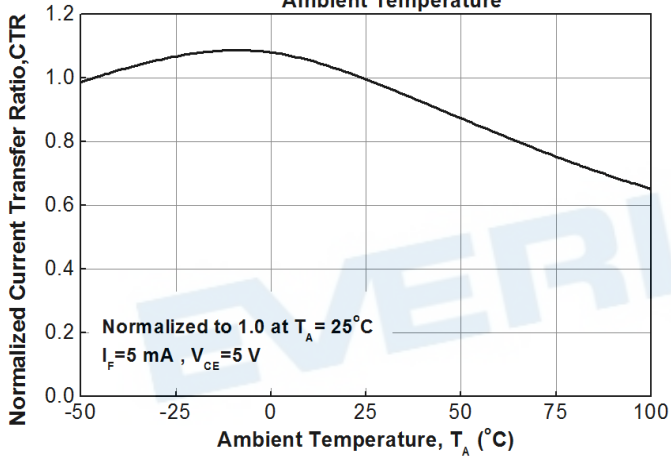


Figure 4. Dark Current vs Ambient Temperature

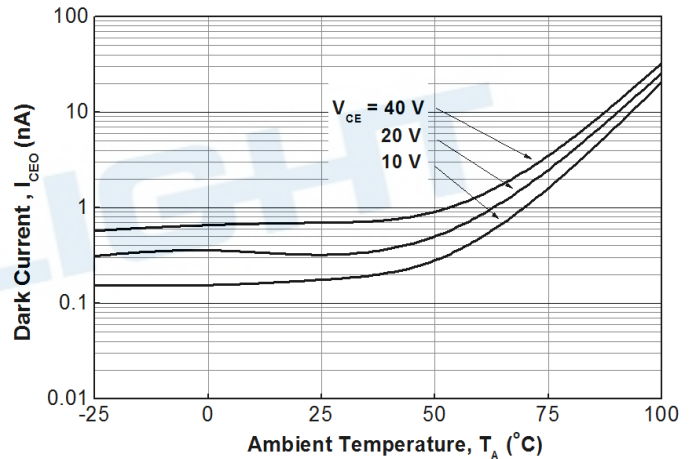


Figure 5. Collector Current vs Collector Saturation Voltage

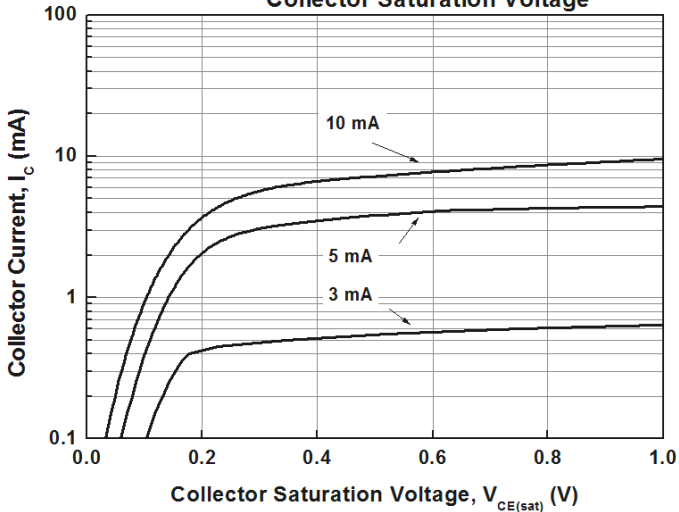
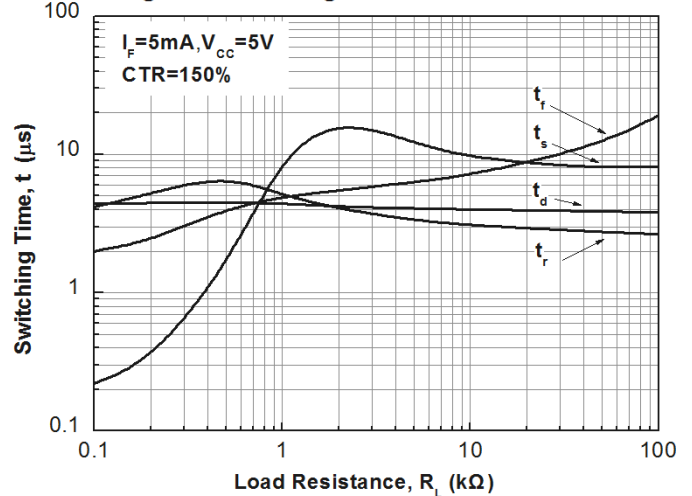


Figure 6. Switching Time vs Load Resistance



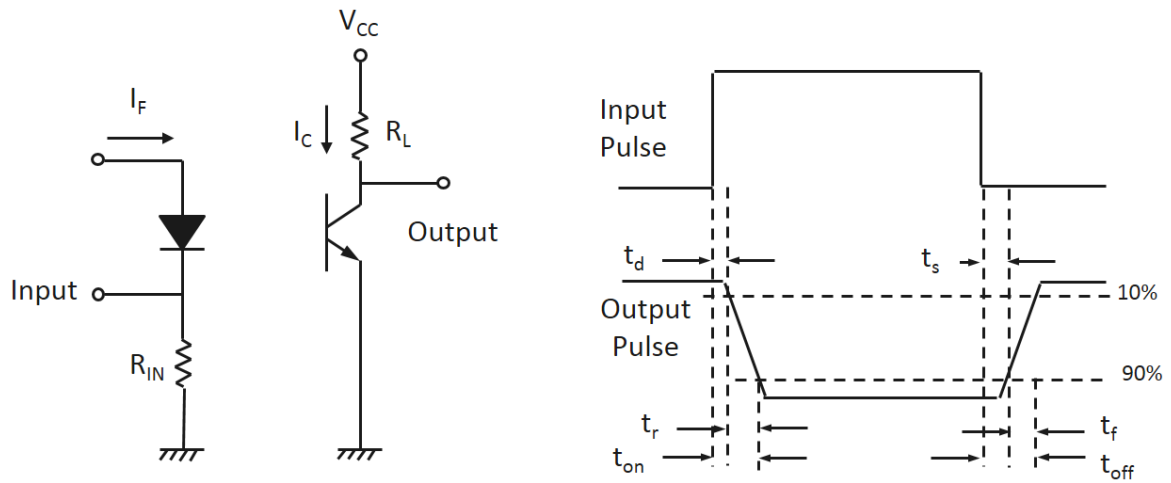


Figure 7. Switching Time Test Circuit & Waveforms

EVERLIGHT

## Order Information

### Part Number

**EL2514X(Y)-VG**


#### Note

- X = Lead form option (S1, S2, M or none)
- Y = Tape and reel option (TU, TD or none)
- V = VDE safety (optional)
- G = Halogens free


| Option  | Description   | Packing quantity    |
|---------|---|---------------------|
| None    | Standard DIP-4  | 100 units per tube  |
| M       | Wide lead bend (0.4 inch spacing)                             | 100 units per tube  |
| S1 (TU) | Surface mount lead form (low profile) + TU tape & reel option | 1500 units per reel |
| S1 (TD) | Surface mount lead form (low profile) + TD tape & reel option | 1500 units per reel |
| S2 (TU) | Surface mount lead form (low profile) + TU tape & reel option | 2000 units per reel |
| S2 (TD) | Surface mount lead form (low profile) + TD tape & reel option | 2000 units per reel |

Package Dimension (Dimensions in mm)


Standard DIP Type

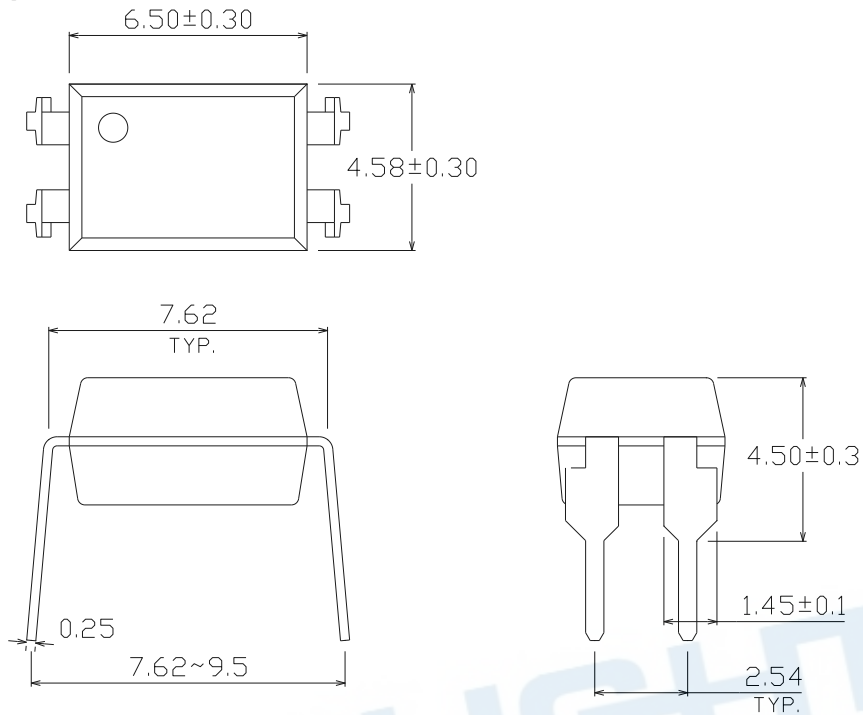


Option M Type

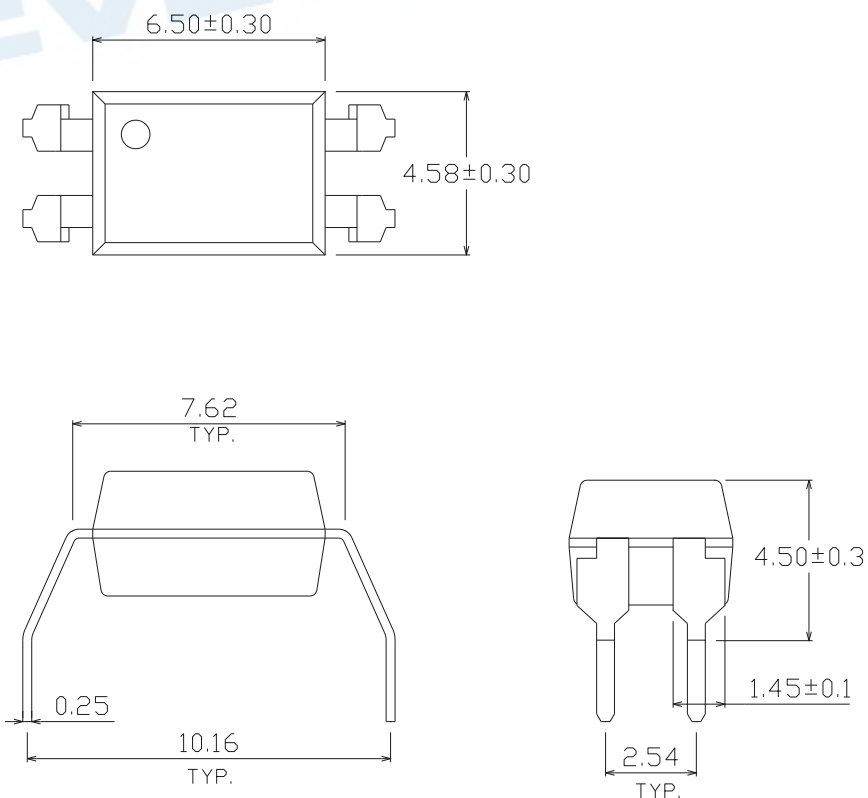

Option S1 Type

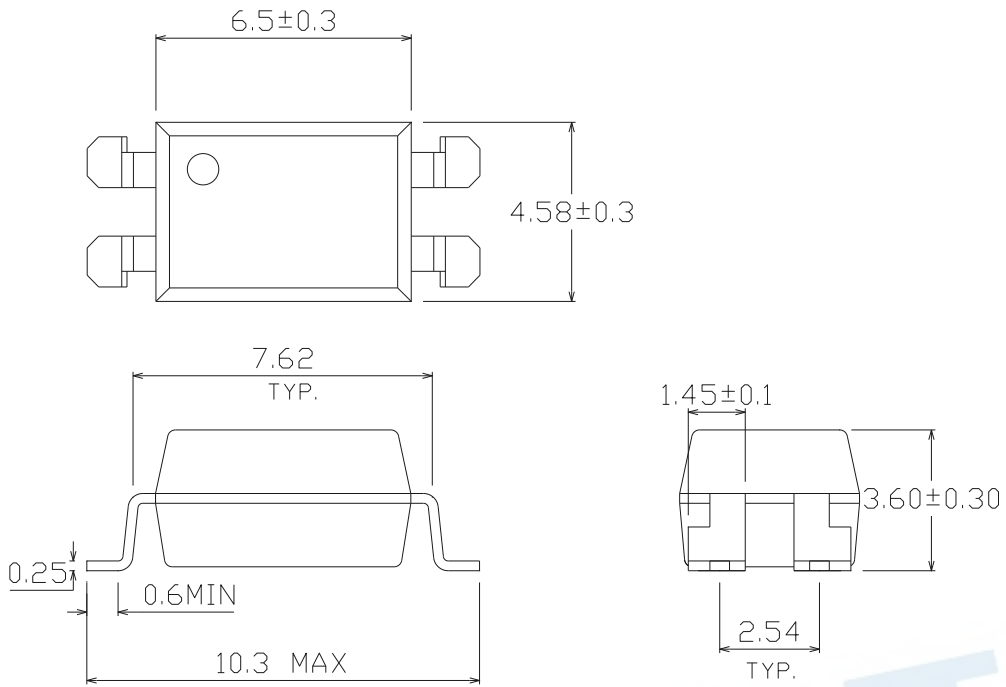


Option S2 Type

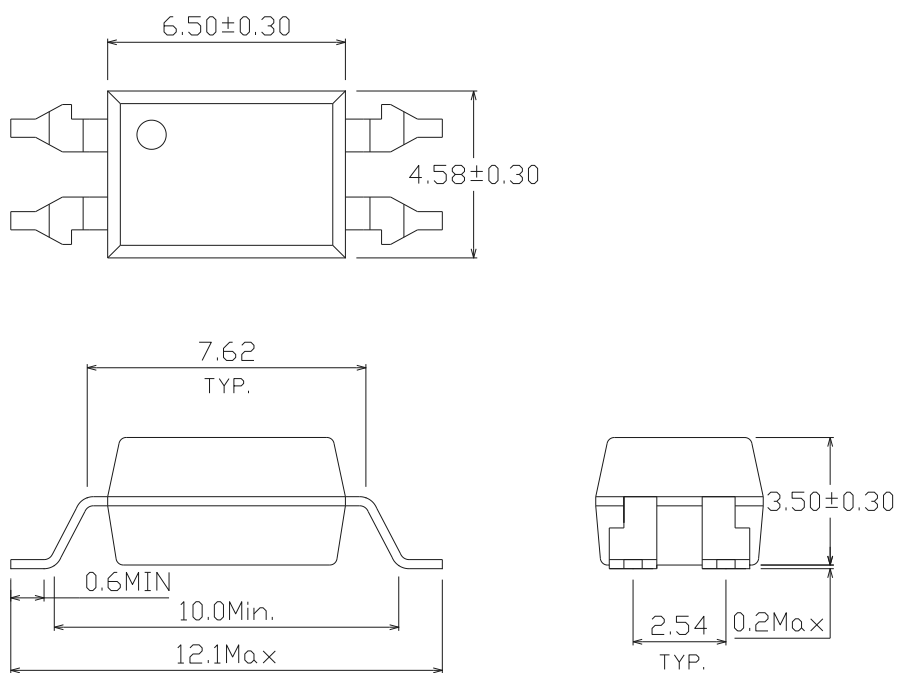




### Recommended pad layout for surface mount leadform

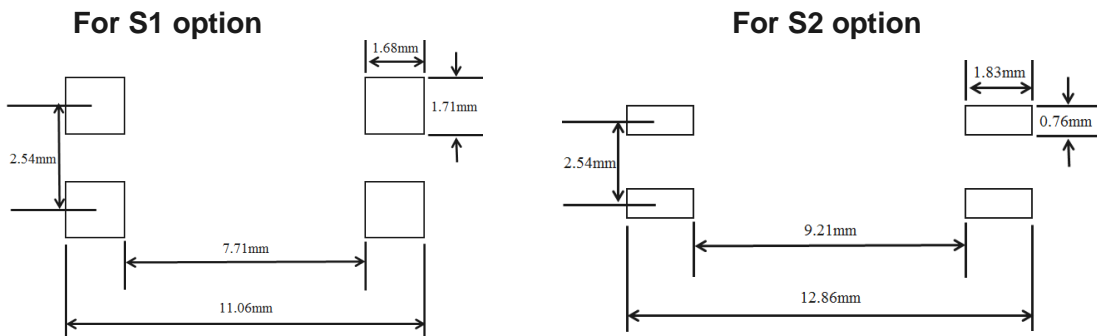

### Notes

Suggested pad dimension is just for reference only.  
Please modify the pad dimension based on individual need.

### Device Marking


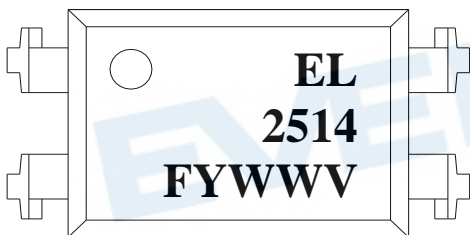


### Notes


EL denotes EVERLIGHT  
2514 denotes Device Number  
F denotes Factory Code (G: China and Green part)  
Y denotes 1 digit Year code  
WW denotes 2 digit Week code  
V denotes VDE (optional)

**Tape & Reel Packing Specifications**


**Option TD**

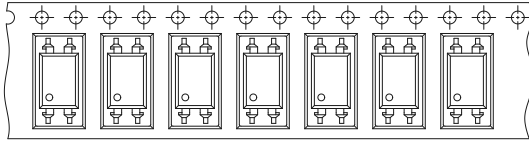


Direction of feed from reel




**Option TU**

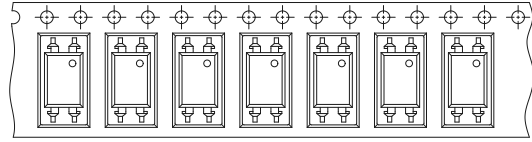

Direction of feed from reel



**Tape dimensions**

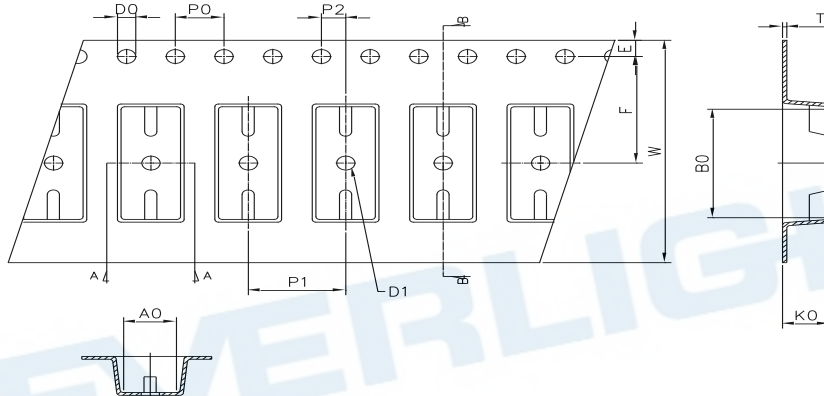


| Dimension No.        | <b>Ao</b> | <b>Bo</b> | <b>Do</b> | <b>D1</b> | <b>E</b>  | <b>F</b>  |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Dimension (mm)<br>S1 | 4.90±0.1  | 10.40±0.1 | 1.5±0.1   | 1.50±0.1  | 1.75±0.1  | 7.50±0.1  |
| Dimension (mm)<br>S2 | 4.88±0.1  | 12.55±0.1 | 1.5±0.1   | 1.50±0.1  | 1.75±0.1  | 11.5±0.1  |
| Dimension No.        | <b>Po</b> | <b>P1</b> | <b>P2</b> | <b>t</b>  | <b>W</b>  | <b>Ko</b> |
| Dimension (mm)<br>S1 | 4.00±0.1  | 8.00±0.1  | 2.00±0.1  | 0.40±0.1  | 16.00±0.3 | 4.60±0.1  |
| Dimension (mm)<br>S2 | 4.00±0.1  | 8.00±0.1  | 2.00±0.1  | 0.40±0.1  | 24.00±0.3 | 4.00±0.1  |

## Precautions for Use

### 1. Soldering Condition

#### 1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

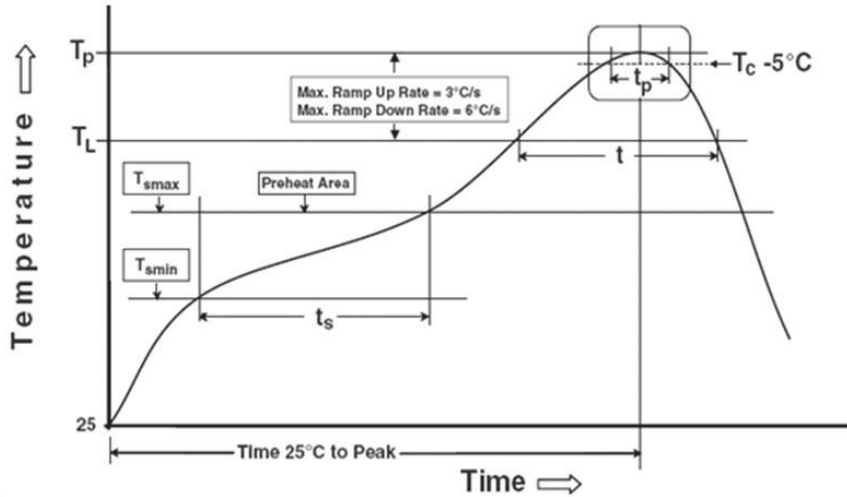

Note:

Reference: IPC/JEDEC J-STD-020D

#### Preheat

|  |                 |
|--|-----------------|
| Temperature min ( $T_{smin}$ )               | 150 °C          |
| Temperature max ( $T_{smax}$ )               | 200°C           |
| Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )  | 60-120 seconds  |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ ) | 3 °C/second max |

#### Other

|  |                  |
|--|------------------|
| Liquidus Temperature ( $T_L$ )                                       | 217 °C           |
| Time above Liquidus Temperature ( $t_L$ )                            | 60-100 sec       |
| Peak Temperature ( $T_p$ )   | 260°C            |
| Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$ | 30 s             |
| Ramp- Down Rate from Peak Temperature                                | 6°C /second max. |
| Time 25°C to peak temperature  | 8 minutes max.   |
| Reflow times   | 3 times          |

## DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [High Speed Optocouplers](#) category:*

*Click to view products by [Everlight](#) manufacturer:*

Other Similar products are found below :

[6N136F](#) [PS8502L2-AX](#) [ACNW261L-000E](#) [ACPL-344JT-000E](#) [ACPL-K49T-500E](#) [ACPL-K74T-000E](#) [ACPL-K75T-000E](#) [ACPL-W21L-560E](#) [ACPL-K44T-500E](#) [TLP187\(TPL,E\(T](#) [TLP2601\(TP1,F\)](#) [610737H](#) [6N137A-X001](#) [6N137A-X017T](#) [6N139-X007T](#) [HCPL2630M](#) [HCPL2731SM](#) [TLP555\(F\)](#) [HCPL2630SM](#) [PS2841-4A-F3-AX](#) [PS9817A-1-F3-AX](#) [PS9821-2-F3-AX](#) [ORPC-817D](#) [ORPC-817M/C](#) [ORPC-817M/B](#) [PT17-51C/L129\(BIN2\)](#) [TLP521-4GBSM](#) [UMW817C](#) [6N137S1\(TA\)](#) [TLP521GB](#) [TLP521GB-S](#) [PS2501](#) [PS2501-S](#) [TLP785GB](#) [TLP785GB-S](#) [LTV-214-G](#) [TLP2766A\(E](#) [TLP2766A\(LF4,E](#) [LCR-0202](#) [EL814S1\(TA\)-V](#) [PC817X4NSZ2B](#) [CYPC817](#) [OR-MOC3023](#) [TLP267J\(TPL,E\(T](#) [TLP109\(TPL,E\(O](#) [EL2514S1\(TU\)\(CLW\)-G](#) [EL816S2\(C\)\(TU\)-F](#) [TLP281-4](#) [MOC3023M](#) [ACPL-K49T-060E](#)