



## Technical Data Sheet

### 1.5mm Side Face Infrared LED

#### IR928-6C-F

#### Features

- High reliability
- High radiant intensity
- Peak wavelength  $\lambda_p=940\text{nm}$
- 2.54mm Lead spacing
- Low forward voltage
- Pb.Free
- This product itself will remain within RoHS compliant version.



#### Descriptions

- EVERLIGHT's Infrared Emitting Diode (IR928-6C-F) is a high intensity diode, molded in a water clear plastic package.
- The miniature side-facing device has a chip, that emits radiation from the side of the clear package.


#### Applications

- Mouse
- Optoelectronic switch
- Infrared applied system

#### Device Selection Guide

LED Part No.	Chip	Lens Color
	Material	
IR928-6C-F	GaAlAs	Water clear

**Package Dimensions**

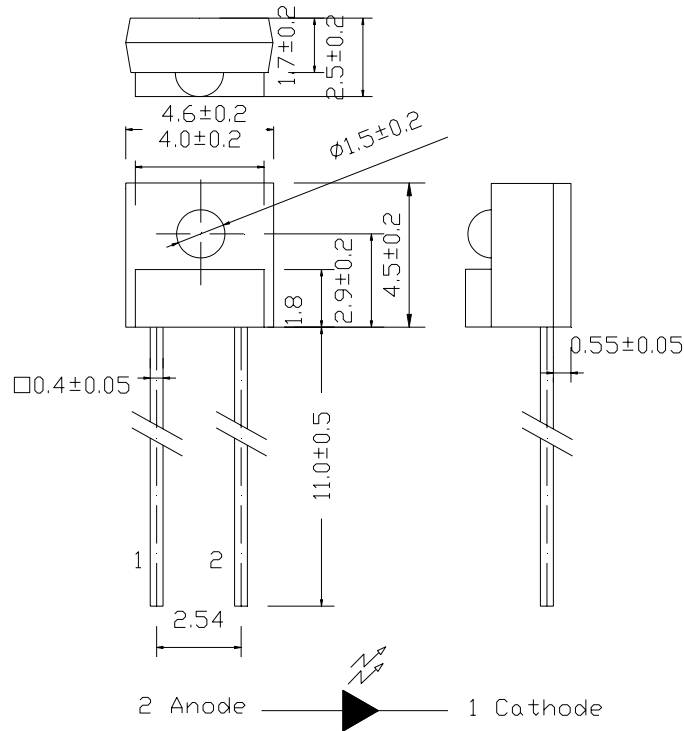

- Notes:** 1.All dimensions are in millimeters  
 2.Tolerances unless dimensions  $\pm 0.25\text{mm}$

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_F$	50	mA
Peak Forward Current(*1)	$I_{FP}$	1.0	A
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{opr}$	-25 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
Soldering Temperature(*2)	$T_{sol}$	260	°C
Power Dissipation at(or below) 25°C Free Air Temperature	$P_d$	75	mW

- Notes:** \*1: $I_{FP}$  Conditions--Pulse Width  $\leq 100 \mu s$  and Duty  $\leq 1\%$ .  
 \*2:Soldering time  $\leq 5$  seconds.

**Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Light Current	Ic(ON)	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V	265	--	1870	μA
Peak Wavelength	λ <sub>p</sub>	I <sub>F</sub> =20mA	--	940	--	nm
Spectral Bandwidth	Δλ	I <sub>F</sub> =20mA	--	50	--	nm
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	--	1.2	1.5	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	--	--	10	μA
View Angle	2θ 1/2	I <sub>F</sub> =20mA	--	40	--	deg

**Wide Rank**

Parameter	Symbol	Min	Max	Unit	Test Condition
5-2	Ic(ON)	1053	1870	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
6-1	Ic(ON)	650	1274	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
6-2	Ic(ON)	465	750	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
7-1	Ic(ON)	347	550	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
7-2	Ic(ON)	306	441	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
7-3	Ic(ON)	265	358	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V

**Thin Rank**

Color Code	Ranks	Symbol	Min	Max	Unit	Test Condition
Yellow	E3	Ic(ON)	286	431	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
Silver	E4	Ic(ON)	357	519	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
Green	E5	Ic(ON)	428	608	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
Purple	E6	Ic(ON)	500	696	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
White	E7	Ic(ON)	571	784	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
Brown	E8	Ic(ON)	643	872	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V
Orange	E9	Ic(ON)	714	960	μA	I <sub>F</sub> =4mA, V <sub>CE</sub> =3.5V

**Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs. Ambient Temperature

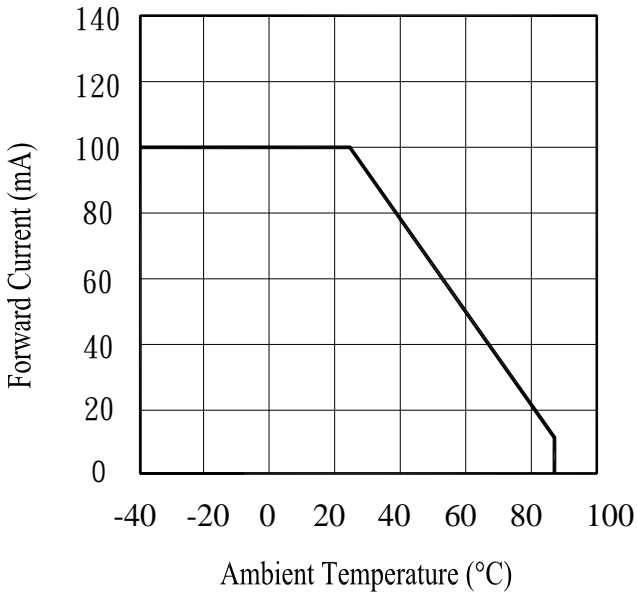


Fig.2 Spectral Distribution

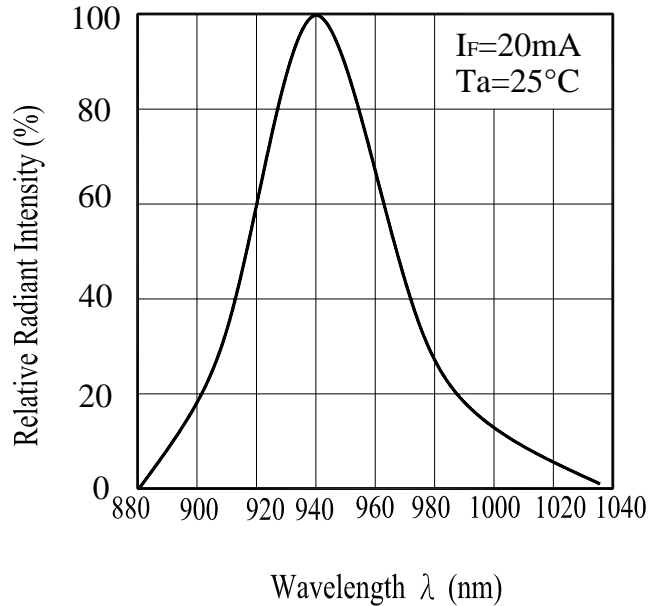


Fig.3 Peak Emission Wavelength vs. Ambient Temperature


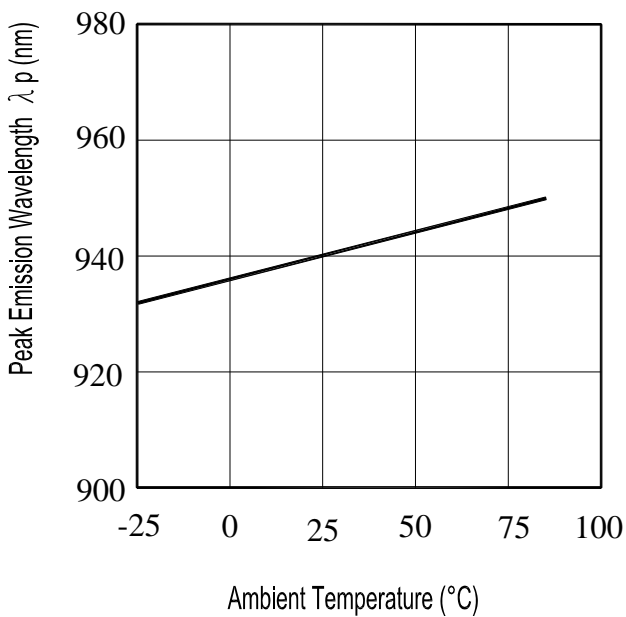


Fig.4 Forward Current vs. Forward Voltage

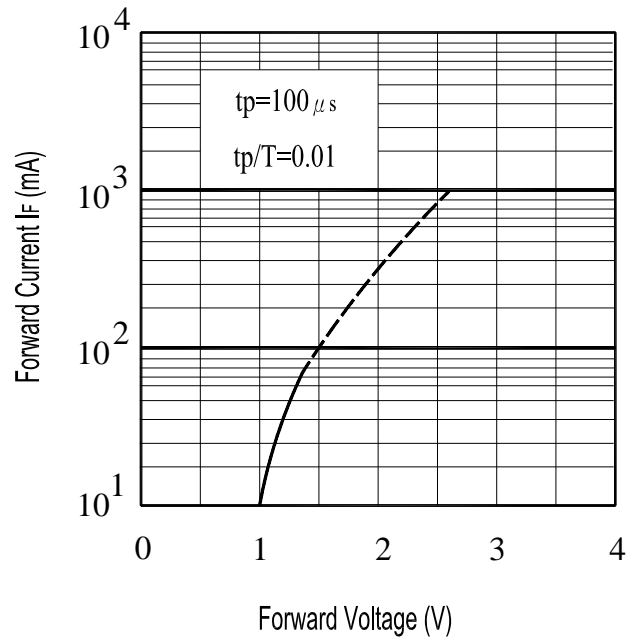

**Typical Electro-Optical Characteristics Curves**

Fig.5 Forward Voltage vs. Ambient Temperature


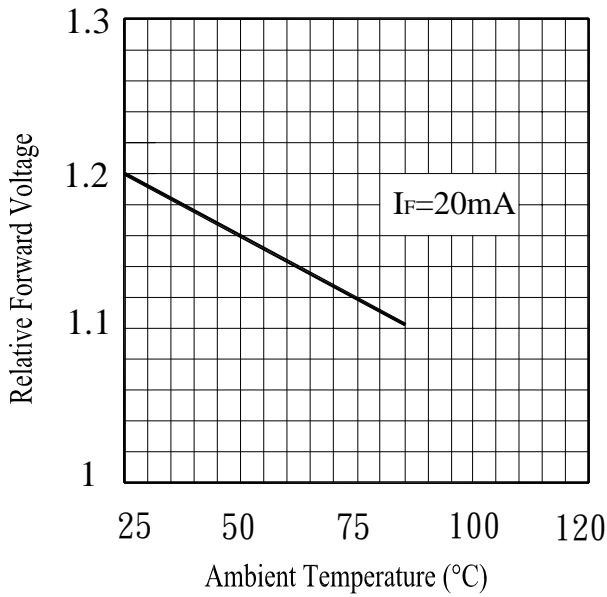



Fig.6 Relative Radiant Intensity vs. Angular Displacement

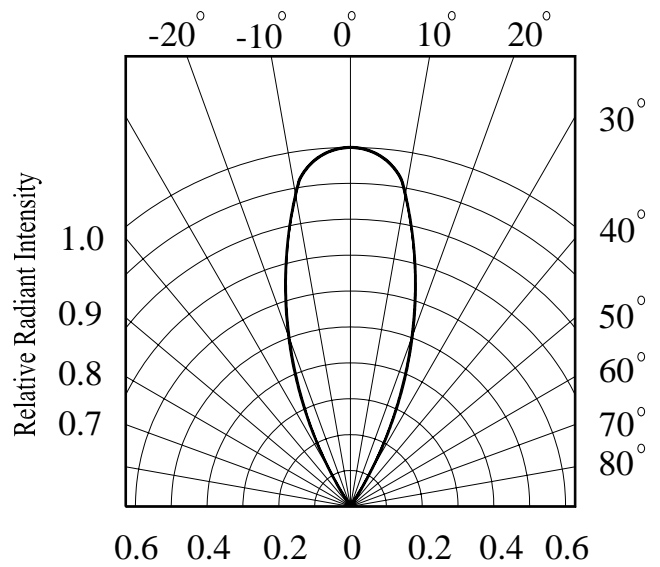

■ **Test Method For  $I_{C(ON)}$ :**

Condition:  $I_F=4mA, V_{CE}=3.5V$

The intensity testing method for infrared emitting diode

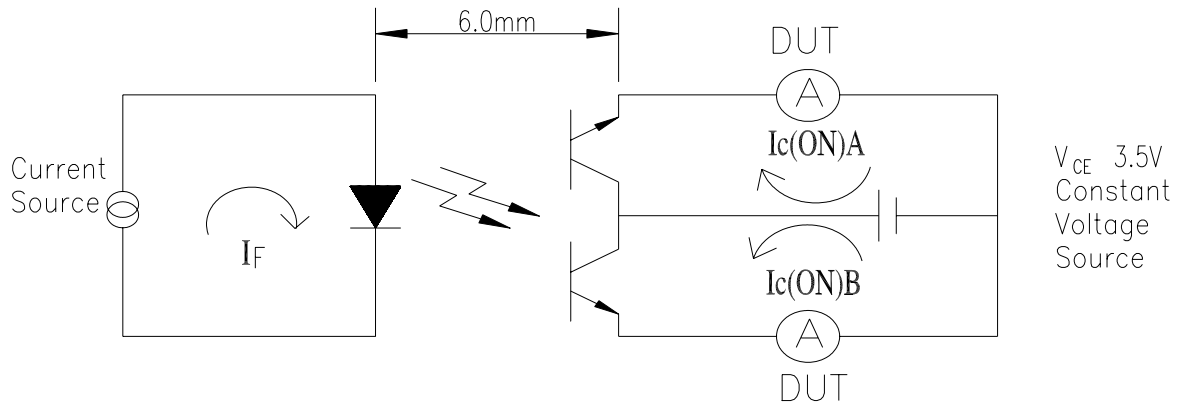







## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [everlight](#) manufacturer:*

Other Similar products are found below :

[HLMP4719](#) [MV50640](#) [ELSH-F71G1-0LPNM-CG2G3](#) [MAN6760](#) [A694B/2SUR/S530-A3](#) [EL452\(TA\)-VG](#) [EL-17-21SURC/S530-A2/TR8](#)  
[4N35S\(TA\)](#) [MV64521](#) [61-238/LK2C-B50638F6GB2/ET](#) [11-21SURC-S530-A3-TR8](#) [99-616LM2C/L7075SGW/TR8-T](#) [MV53123](#)  
[HLMP2785](#) [ELSH-Q61F1-0LPNM-JF3F8](#) [ELSW-J11C1-0CPGS-C5700](#) [MV5464MP4B](#) [IR333C-F-A](#) [12-21/BHC-AP1Q2M/2C](#) [ELSH-](#)  
[F81M1-0CPGS-C3000](#) [PD15-21C/TR8](#) [45-21SCUM2C/L1720NE6/TR8-T](#) [HLMP-2550](#) [PT2559B/L2/H2\(A5\)](#) [19-213SYGC/S530-E2/TR8](#)  
[1254-10SURT/S530-A3](#) [PD438C/S46](#) [264-7GD](#) [45-11-BFSB-49373902E-2T8-AM](#) [MSQC4411C](#) [PD95-21B/TR10](#) [EL814\(A\)](#) [IRM-](#)  
[H920J5/TR2](#) [EL814](#) [ITR9702-F](#) [67-21/T2C-ZV1W2E/2T](#) [12-215/BHC-AP1Q2/3C](#) [67-21S/KK3C-H3030R1R42835Z15/2T](#) [EL4N35](#)  
[MV8411](#) [ITR9707](#) [67-31EP6-UYD8395DAFAZ5-ET0D-AM](#) [45-21UYC/S530-A3/TR8](#) [IR908-7C\(E4\)](#) [IR333-A R](#) [IR19-21C/TR8](#) [ALS-](#)  
[PDIC243-3C](#) [ELSH-F41R1-0LPNM-AR5R6](#) [24-21UYC/S530-A4/TR8](#) [99-616LM2C/L7580S76/TR8-T/ES](#)