

ITR1204SR10A/TR

Features

- High sensitivity
- Cut-Off visible wavelength
- Compliance Halogen Free(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- Compliance with EU REACH
- This product itself will remain within RoHS compliant version.

Description

The SMD type ITR1204SR10A/TR consists of an infrared emitting diode and an silicon phototransistor. The phototransistor receives radiation from the IR only. This is the normal situation. But when a reflecting object close to ITR, phototransistor receives the reflecting radiation and the different distance have different light current.


Applications

- Printer
- Switch Scanner
- Non-contact Switching

Device Selection Guide

Device No.	Chip Material	Lens Color
IR	GaAs	Black clear
PT	Silicon	Black clear

Package Dimensions

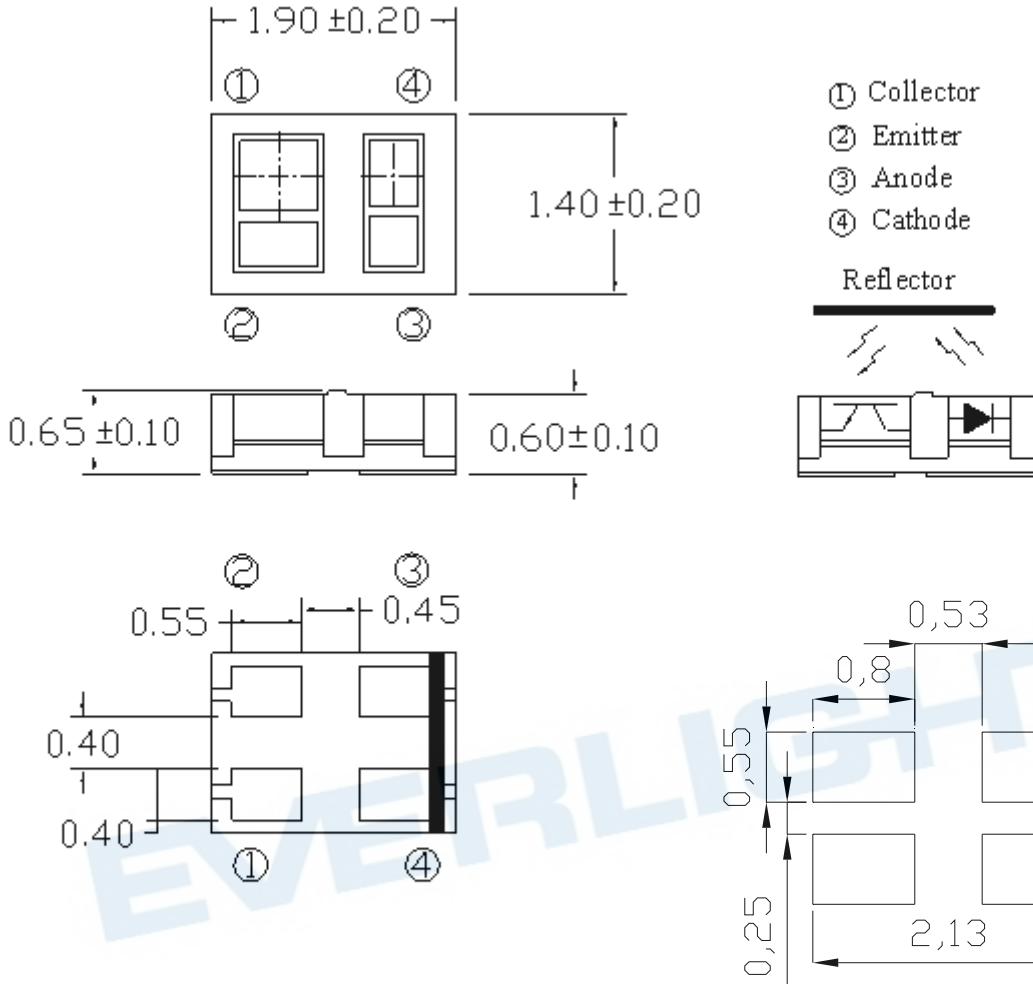

Recommended Soldering Pattern

Notes:

1. All dimensions are in millimeters
2. Tolerances unless dimensions ±0.2mm
3. Lead spacing is measured where the lead emerge from the package

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25°C Free Air Temperature	Pd	75	mW
	Reverse Voltage	V _R	6	V
	Forward Current	I _F	50	mA
Output	Collector Power Dissipation	P _C	75	mW
	Collector Current	I _C	20	mA
	Collector-Emitter Voltage	B V _{CEO}	30	V
	Emitter-Collector Voltage	B V _{ECO}	5	V
Operating Temperature		T _{opr}	-25~+85	°C
Storage Temperature		T _{stg}	-40~+100	°C
Lead Soldering Temperature (*1)		T _{sol}	260	°C







(*1) t ≤ 5 Sec


Electro-Optical Characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V _F	-	1.25	1.5	V	I _F =4mA
	Reverse Current	I _R	-	-	10	μA	V _R =6V
	Peak Wavelength	λ _p	-	940	-	nm	I _F =20mA
Output	Dark Current	I _{CEO}	-	-	0.1	uA	V _{CE} =10V
Transfer Characteristics	Collect Current	I _{C(ON)}	60	-	130	μA	V _{CE} =2V, I _F =4mA
	Operating Dark Current*	I _{CEOD}			1	μA	V _{CE} =2V, I _F =2mA
	Rise Time	T _r	-	15	-	μs	V _{CE} =2V I _C =0.1mA R _L =1000Ω
	Fall Time	T _f	-	15	-	μs	


*Operating dark current may be affected by surrounding situation.

Opto Characteristic Curves

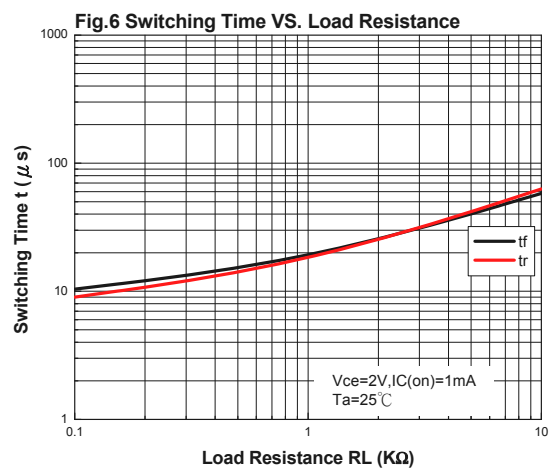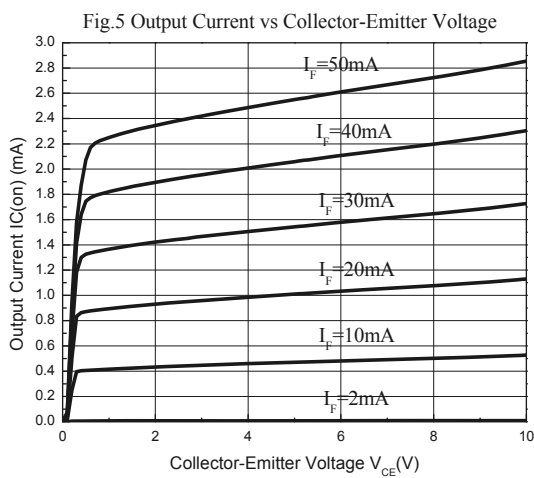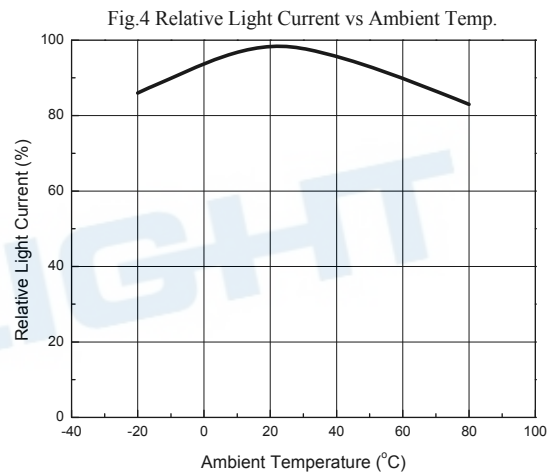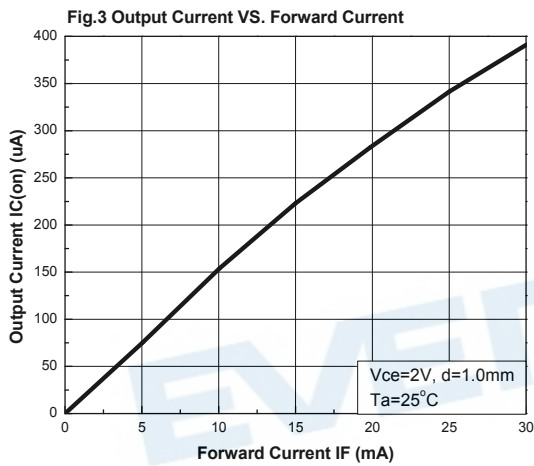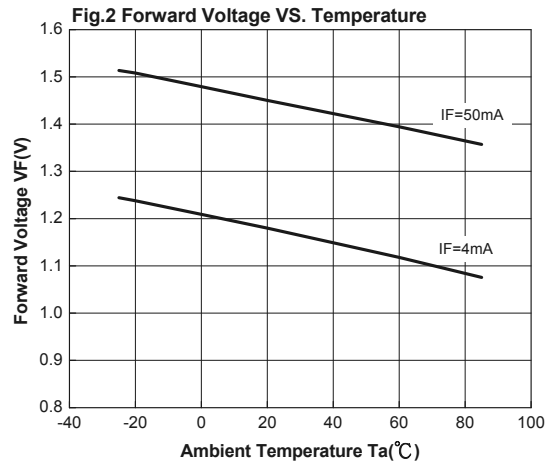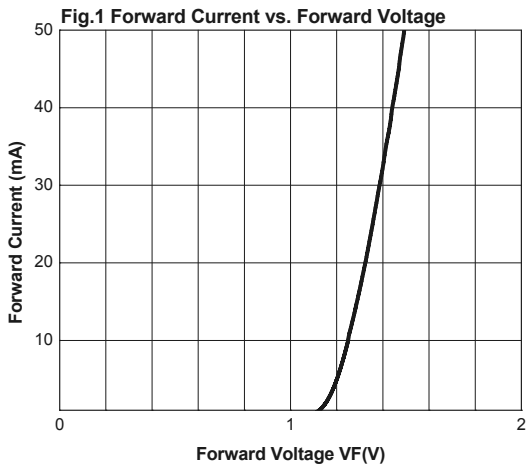


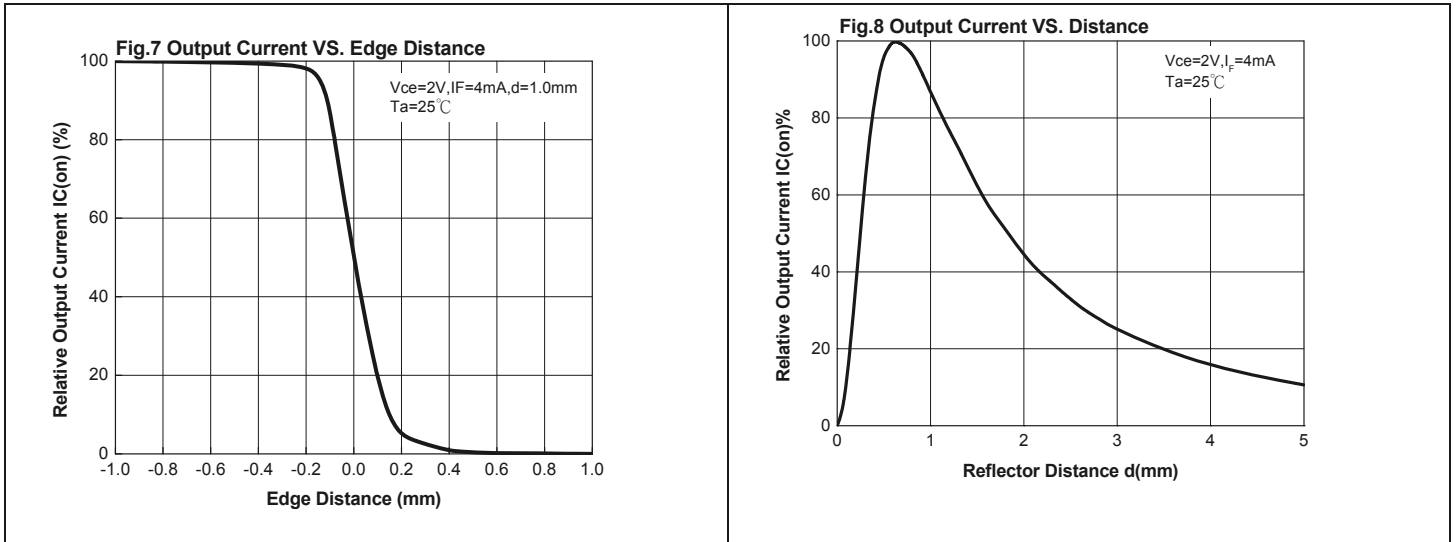


Measuring Specification For Reflector Response

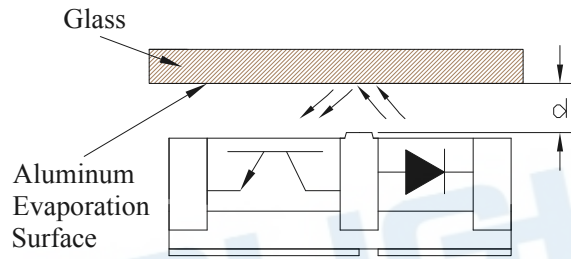


Measuring Specification For Edge Response

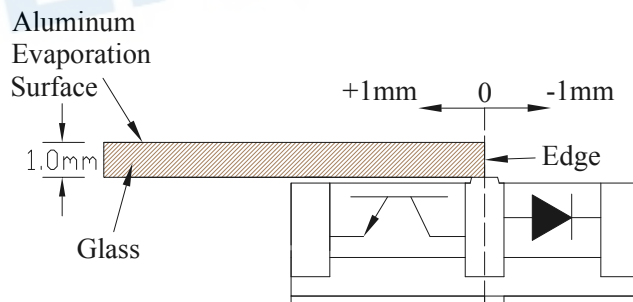


Measuring Circuit For Response Time

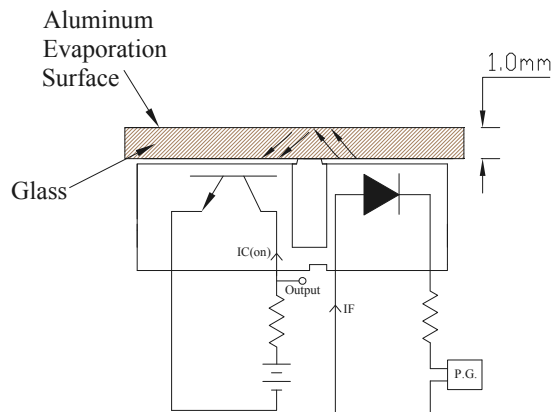

Package Dimensions

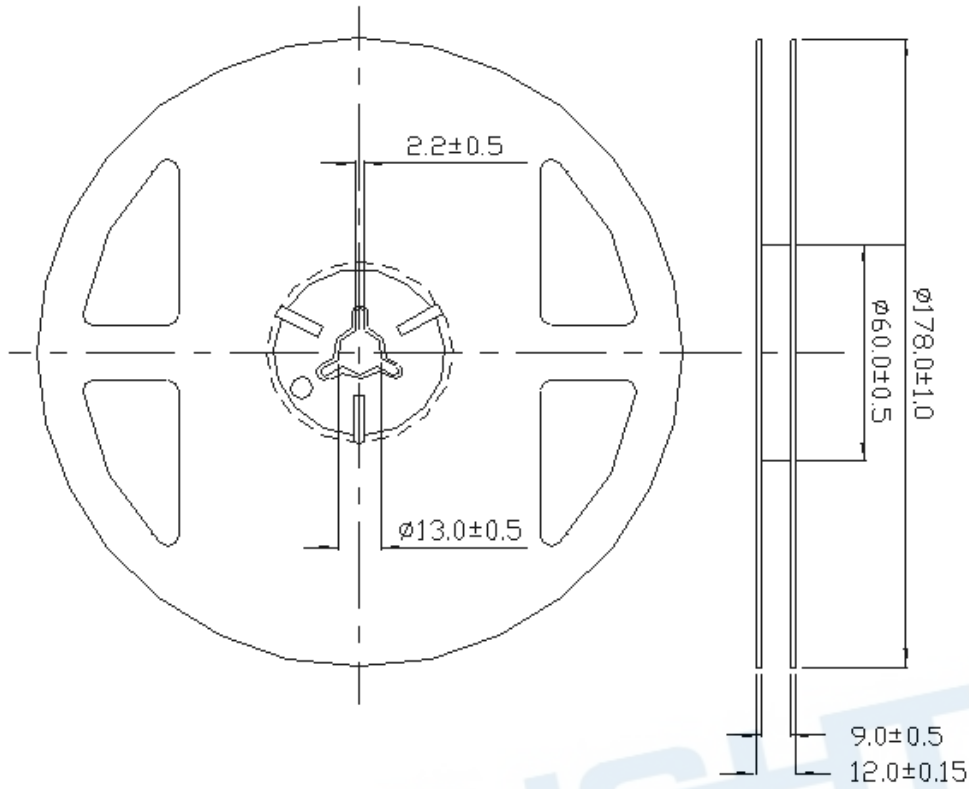

Taping Dimension

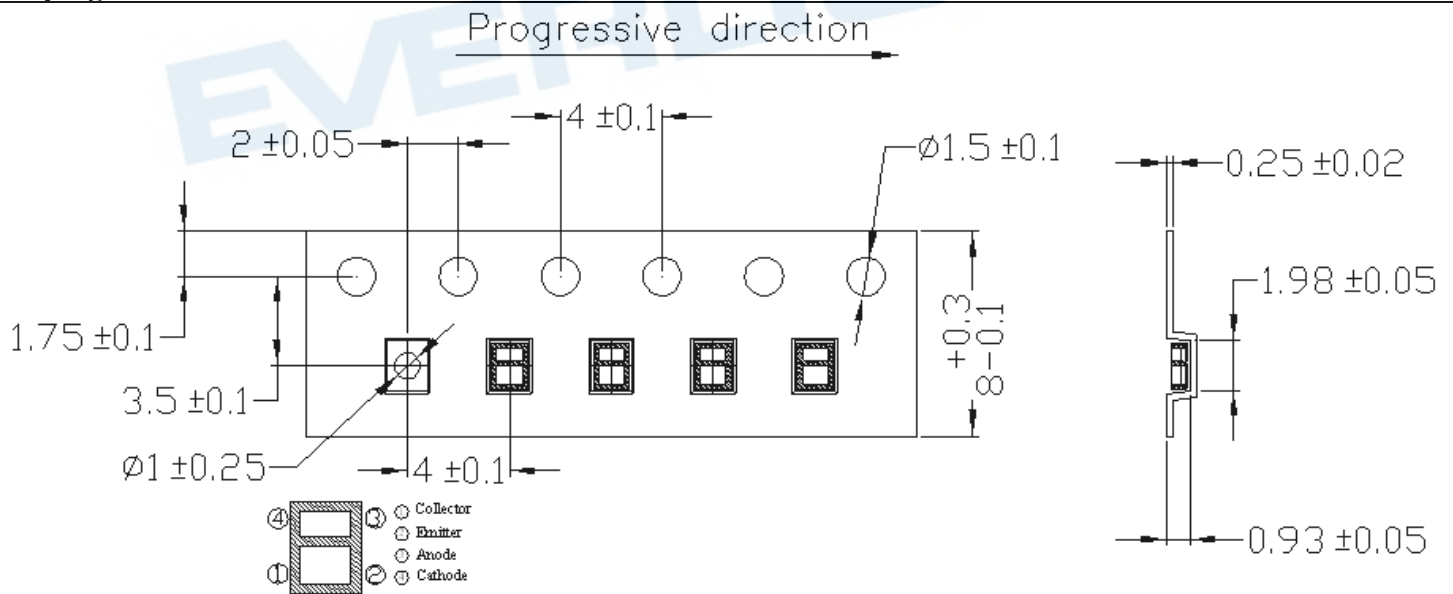


Packing Quantity Specification


1.2000PCS/1Bag , 10Bags/1Box

2.10Boxes/1Carton

Packing Procedure

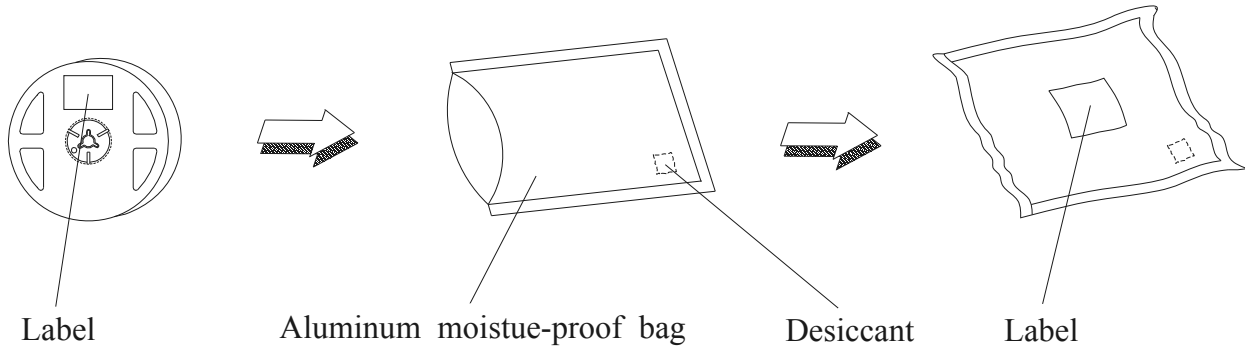

Outer Carton Dimension : 409mm(A)*245mm(B)*360mm(C)

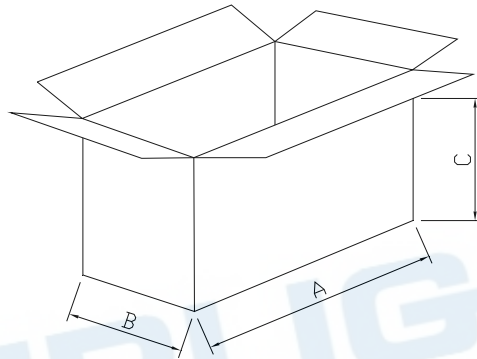

Recommended Method of Storage


The following are general recommendations for moisture sensitive level (MSL) 3 storage and use :

1. Storage

- 1.1 Do not open moisture proof bag before the products are ready to use.
- 1.2 Before opening the package, the device should be kept at 30°C or less and 90%RH or less.
- 1.3 The device should be used within a year.
- 1.4 After opening the package, the device should be kept at 30°C or less and 70%RH or less.
- 1.5 The device should be used within 168 hours (7 days) after opening the package.
- 1.6 If the moisture absorbent material (silica gel) has faded away or the device have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5°C for 24 hours.


2. Soldering Condition

- a) Pb-free solder temperature profile
- b) Reflow soldering should not be done more than two times.
- c) When soldering, do not put stress on the LEDs during heating.
- d) After soldering, do not warp the circuit board.

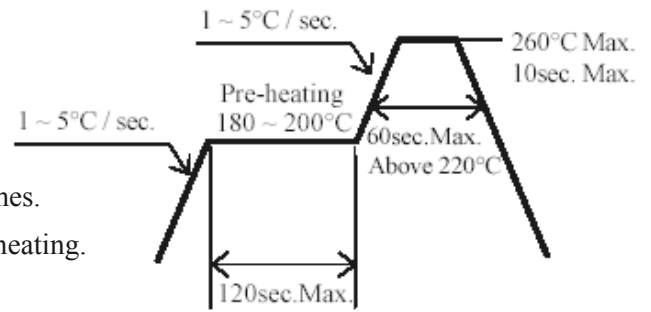


Repairing


Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

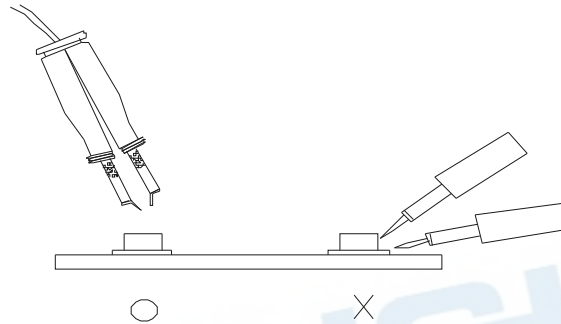




Label Form Specification



RoHS **Pb** **EVERLIGHT**


CPN : XXXXXXXXX

 XXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX


P/N :

 XXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX

LOT NO :


QTY :  HUE : 

CAT :  REF : 

REFERENCE : 



- CPN: Customer's Production Number
- P/N : Production Number
- QTY: Packing Quantity
- CAT: Ranks
- HUE: Peak Wavelength
- REF: Reference
- LOT No: Lot Number
- MADE IN TAIWAN: Production Place

Disclaimer

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optical Switches, Transmissive, Phototransistor Output](#) *category:*

Click to view products by [Everlight](#) *manufacturer:*

Other Similar products are found below :

[LTH-301-07](#) [LTH-301-23](#) [LTH-306-02](#) [E3C-X2C](#) [E3S-LS20B4S1](#) [KRA021](#) [LTH-309-08](#) [HOA1961-055](#) [RPI-0128T81](#) [RPI-124](#) [LTH-306-01](#) [ITR1205ST11A/TR](#) [ZPT-3528C-14-Z2](#) [ZSOS-T0603-F](#) [LTH-306-73](#) [ZSOS-T0502-02](#) [ZSOS-T1405-A02-F6](#) [ZSOS-T2403-01](#) [ZSOS-T1306-02-F34](#) [ZSOS-T1305-A02](#) [ZSOS-T1405-A58](#) [ZSOS-T1305-D02](#) [ZSOS-T1002-02](#) [ZSOS-T1406-02](#) [ZSOS-T1305-02-F](#) [ZSOS-T1204-A01](#) [KRB011](#) [KRB031](#) [DY-ITR9909\(L\)](#) [ITR1204SR10A/TR](#) [ZSOS-T1003-02](#) [ZSOS-T0502-03-Z2](#) [RPI-125](#) [RPI-243](#) [EE-SX153](#) [EE-SX675P-WR 1M](#) [EE-SX952P-R 1M](#) [EE-SX971-C1](#) [OPB806](#) [OPB853A3](#) [GP1S396HCP0F](#) [OPB857Z](#) [EE-SV3-B](#) [EE-SJ3-D](#) [RPI-0226](#) [EE-SX951P-W 1M](#) [EE-SX954-W 1M](#) [EE-SX672R](#) [EE-SX954P-W 1M](#) [EE-SX952-R 1M](#)