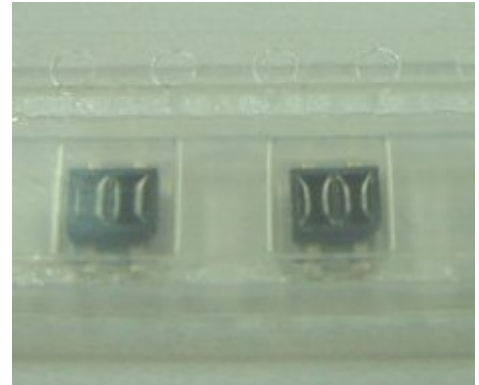


Technical Data Sheet
Opto Interrupter**ITR8307/S17/TR8****Features**

- Fast response time
- High sensitivity
- Cut-Off visible wavelength
- Thin
- Compact
- Pb free
- This product itself will remain within RoHS compliant version.

**Descriptions**


ITR8307/S17/TR8 is a light reflection switch which includes a GaAs IR-LED transmitter and a NPN photo-transistor with a high photosensitive receiver for short distance, operating in the infrared range. Both components are mounted side- by- side in a plastic package.

Applications

- Camera
- VCR
- Floppy disk driver
- Cassette type recorder
- Various microcomputer control equipment

Device Selection Guide

| Device No. | Chip Material |
|------------|---------------|
| IR | GaAs |
| PT | Silicon |

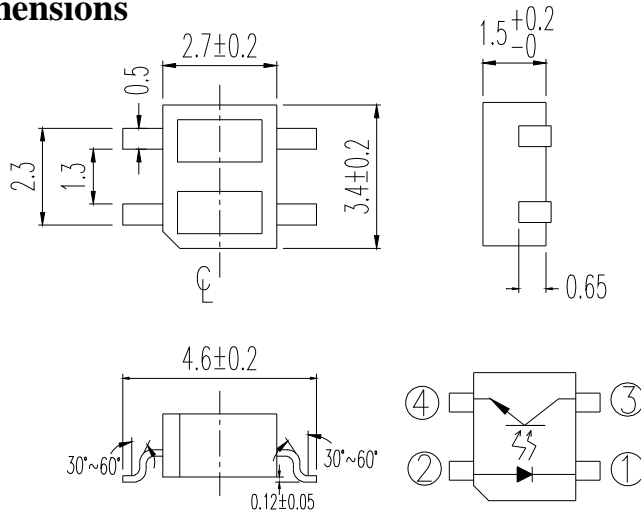Technical Data Sheet
Opto Interrupter
ITR8307/S17/TR8
Package Dimensions


- ① : CATHODE ③ : COLLECTOR
 ② : ANODE ④ : EMITTER

- Notes:** 1. All dimensions are in millimeters
 2. Tolerances unless dimensions $\pm 0.15\text{mm}$

Absolute Maximum Ratings (Ta=25 °C)

| Parameter | | Symbol | Ratings | Unit |
|---------------------------------|--|--------------------|---------|------|
| Input | Power Dissipation at (or below) 25 °C Air Temperature | Pd | 75 | mW |
| | Reverse Voltage | V _R | 5 | V |
| | Forward Current | I _F | 50 | mA |
| | Peak Forward Current (*1) Pulse width 100 μs, Duty cycle=1% | I _{FP} | 1 | A |
| | Collector Power Dissipation | P _C | 75 | mW |
| Output | Collector Current | I _C | 50 | mA |
| | Collector-Emitter Voltage | B V _{CEO} | 30 | V |
| | Emitter-Collector Voltage | B V _{ECO} | 5 | V |
| | Operating Temperature | T _{opr} | -25~+85 | |
| Storage Temperature | T _{stg} | -30~+90 | | |
| Lead Soldering Temperature (*2) | T _{sol} | 260 | | |

(* 1) $t_w=100 \mu \text{sec.}$, $T=10 \text{msec.}$ (* 2) $t=5 \text{Sec}$



Technical Data Sheet

Opto Interrupter

ITR8307/S17/TR8

Electro-Optical Characteristics (Ta=25)

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------|------------------------|---------------|------|------|------|-----------|-----------------------------------|
| Input | Forward Voltage | V_F | --- | 1.2 | 1.6 | V | $I_F=20mA$ |
| | Reverse Current | I_R | --- | --- | 10 | μA | $V_R=5V$ |
| | Peak Wavelength | λ_P | --- | 940 | --- | nm | --- |
| Output | Dark Current | I_{CEO} | --- | --- | 100 | nA | $V_{CE}=10V$ |
| | C-E Saturation Voltage | $V_{CE(sat)}$ | --- | --- | 0.4 | V | $I_C=2mA$ $E_e=1mW/cm^2$ |
| Transfer Characteristics | Light Current | $I_C(ON)$ | 0.18 | --- | 0.44 | mA | $V_{CE}=5V$ |
| | Leakage Current | I_{CEOD} | --- | --- | 1 | μA | $I_F=10mA$ |
| | Rise time | t_r | --- | 20 | --- | μsec | $V_{CE}=2V$ |
| | Fall time | t_f | --- | 20 | --- | μsec | $I_C=100 \mu A$ $R_L=1K\Omega$ |

Rank

Conditions : $I_F=10mA$ $V_{CE}=5V$ Unit: μ

| Bin number | Min | Max |
|------------|-----|-----|
| B | 180 | 300 |
| C | 250 | 440 |

**Technical Data Sheet
Opto Interrupter**
ITR8307/S17/TR8
Typical Electrical/Optical/Characteristics Curves for IR

Fig. 1 Forward Current vs. Ambient Temperature

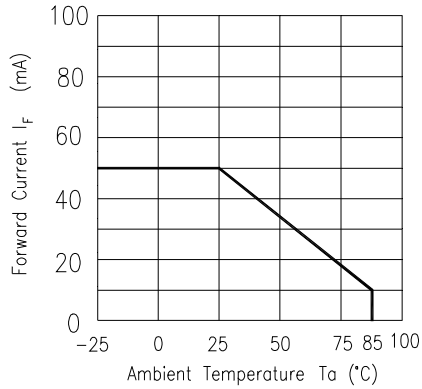


Fig. 2 Spectral Distribution

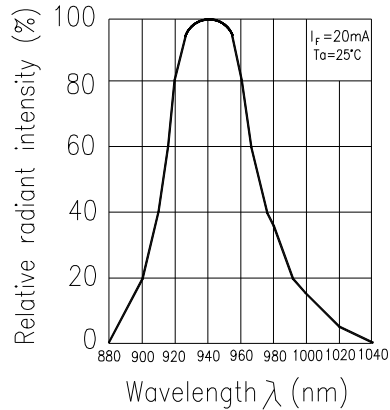


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

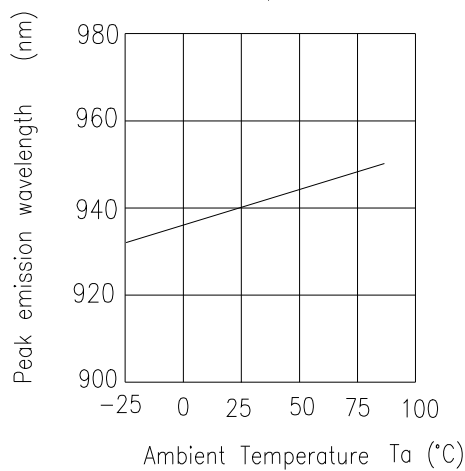


Fig. 4 Forward Current vs. Forward Voltage

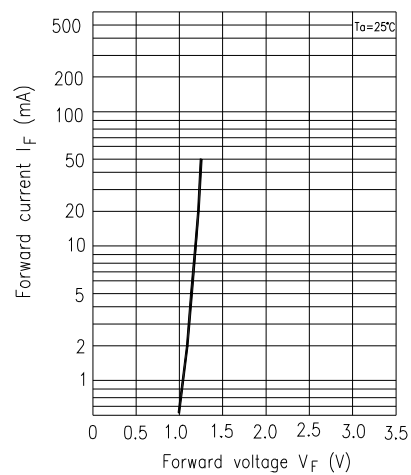


Fig. 5 Forward Voltage vs. Ambient Temperature


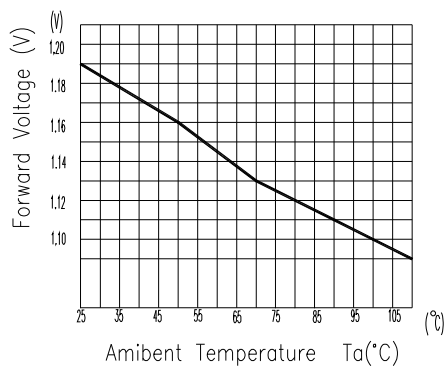


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

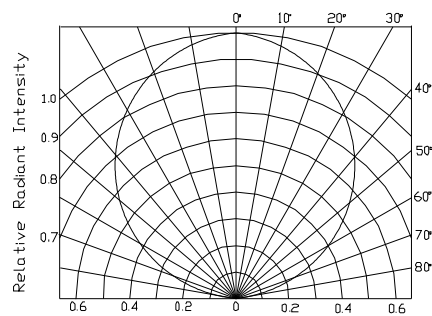

**Technical Data Sheet
Opto Interrupter**
ITR8307/S17/TR8
Typical Electro/Optical/Characteristics Curves for PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

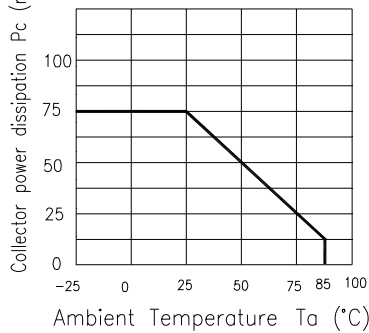


Fig.2 Collector Dark Current vs. Ambient Temperature

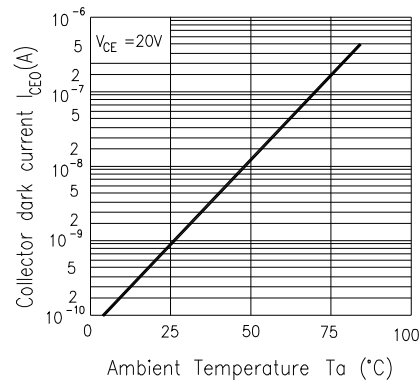


Fig. 3 Relative Collector Current vs. Ambient Temperature

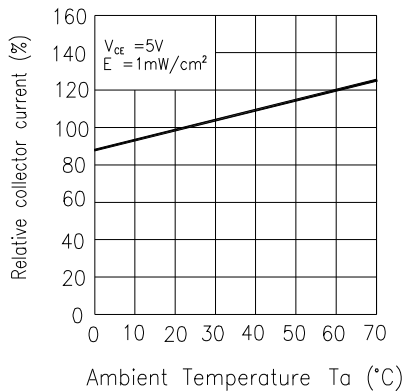


Fig.4 Collector Current vs. Irradiance

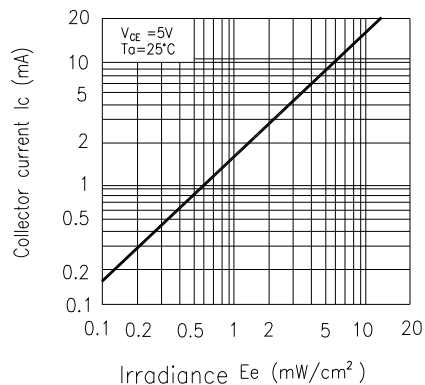


Fig.5 Spectral Sensitivity


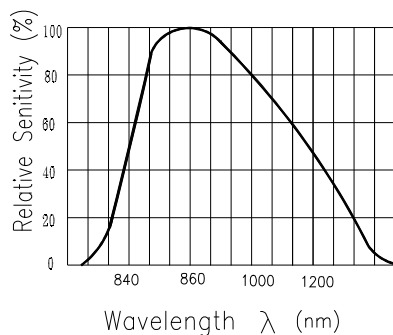


Fig.6 Collector Current vs. Collector-emitter Voltage

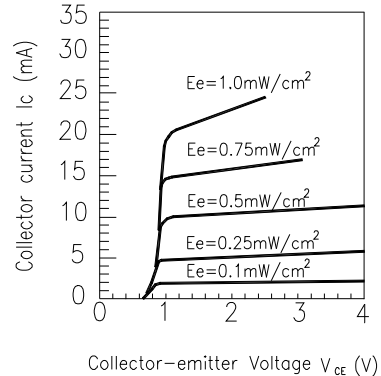

**Technical Data Sheet
Opto Interrupter**
ITR8307/S17/TR8
Typical Electrical/Optical/Characteristics Curves For ITR

Fig.1 Relative Collector Current vs. Distance between Sensor and Al Evaporation Glass

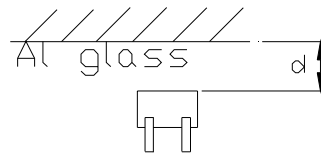
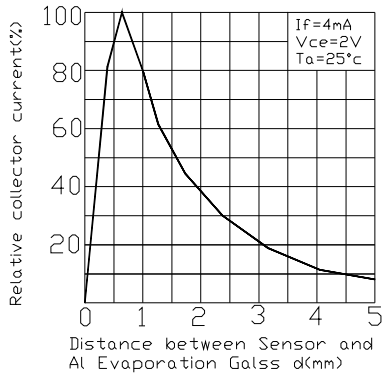


Fig.2 Relative Collector Current vs. Card Moving Distance (l)







Fig.3 Response Time vs. Load Resistance

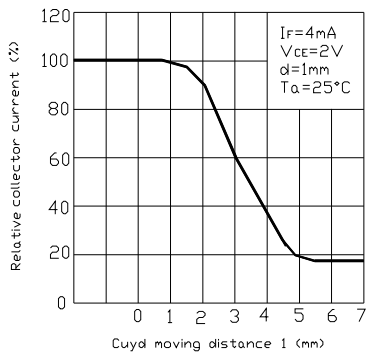

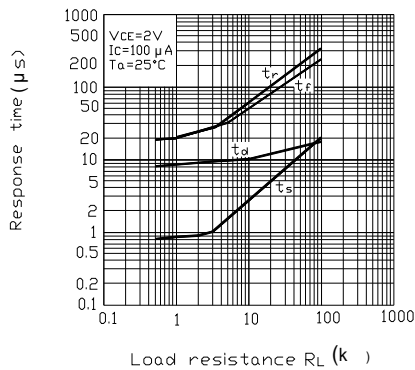

Technical Data Sheet
Opto Interrupter

ITR8307/S17/TR8


Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%


Table with 7 columns: NO., Item, Test Conditions, Test Hours/Cycles, Sample Sizes, Failure Judgement Criteria, Ac/Re. Rows include Solder Heat, Temperature Cycle, Thermal Shock, High Temperature Storage, Low Temperature Storage, DC Operating Life, and High Temperature/High Humidity.

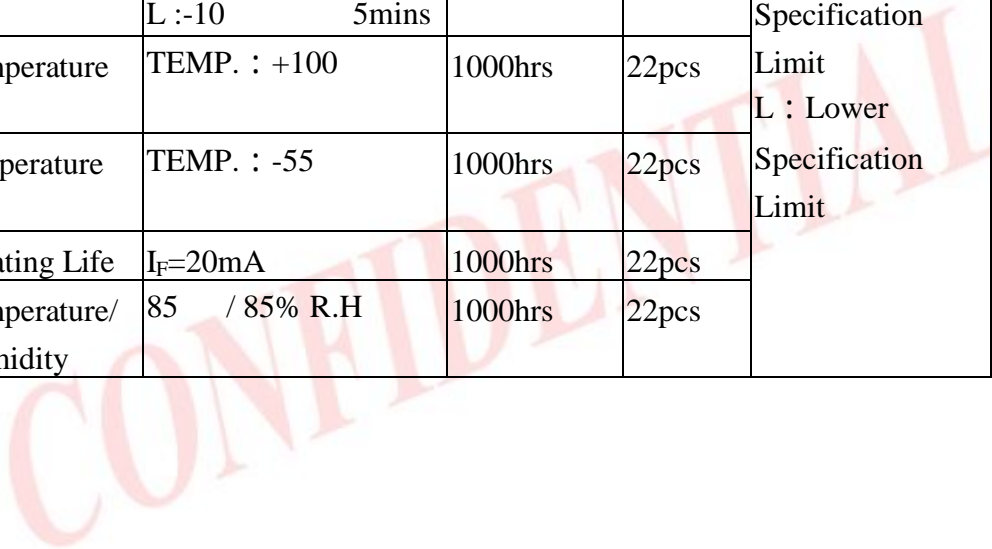

Technical Data Sheet
Opto Interrupter
ITR8307/S17/TR8
Recommended Method of Storage


The following are general recommendations for moisture sensitive level (MSL) 4 storage and use:

- Shelf life in sealed bag: 12 months at < 40 °C and < 90% relative humidity (RH)
- After bag is opened, devices that will be subjected to reflow solder or other high temperature process must
 - a) Mounted within 72 hours of factory conditions < 30 °C/60%RH, or
 - b) Stored at <20% RH
- Devices require bake, before mounting, if:
Humidity Indicator Card is > 20% when read at 23 ± 5 °C
- If baking is required, devices may be baked:
 - a) 192 hours at 40 °C, and <5% RH(dry air/nitrogen) or
 - b) 96 hours at 60 °C, and <5% RH for all device containers
 - c) 24 hours at 125 °C
- Soldering Condition
 - a) Pb-free solder temperature profile

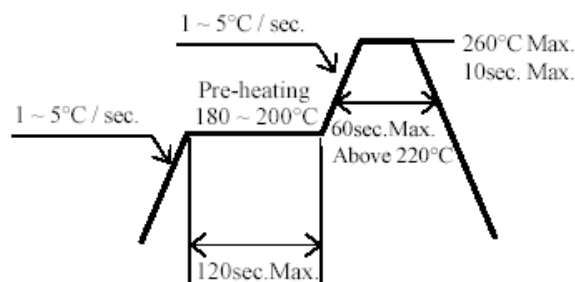

- b) Reflow soldering should not be done more than two times.
 - c) When soldering, do not put stress on the LEDs during heating.
 - d) After soldering, do not warp the circuit board.
- Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

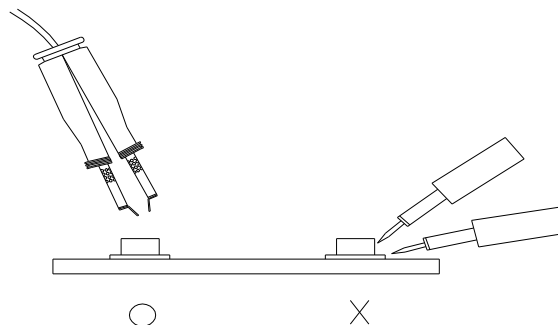


Technical Data Sheet
Opto Interrupter

ITR8307/S17/TR8


Taping Dimension

Progressive direction →

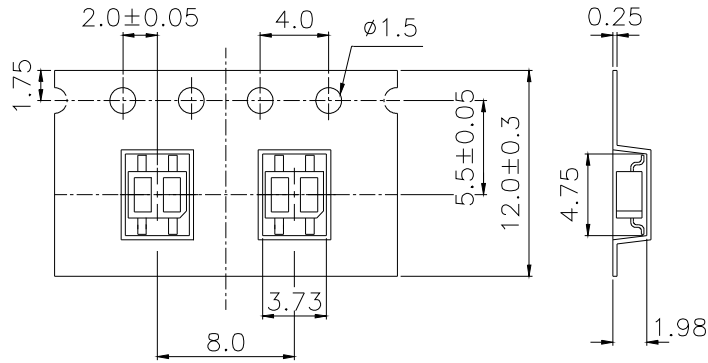


General Tolerance ± 0.1
UNIT:mm

Reel Dimensions

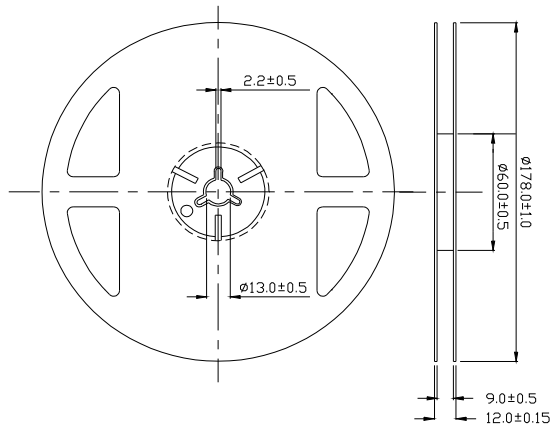

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

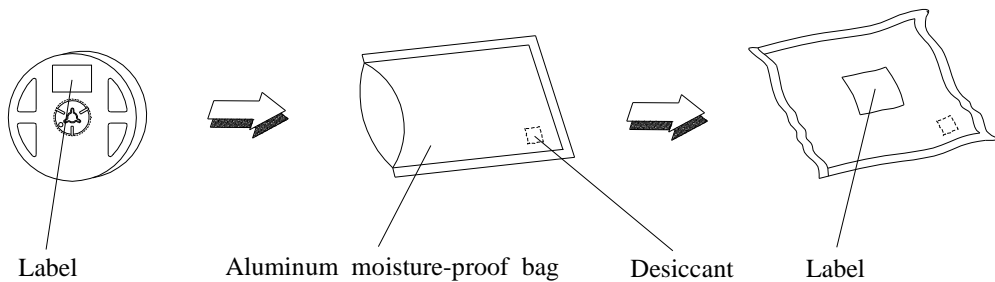




Technical Data Sheet
Opto Interrupter

ITR8307/S17/TR8

Packing Quantity Specification

- 1. 1000 Pcs/ 1Reel
- 2. 15 Reel /1 Box
- 3. 2 Box/ 1 Carton

Label Form Specification

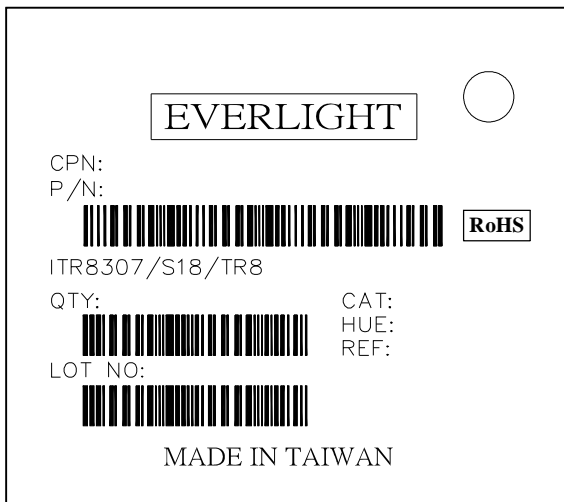

CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: None
HUE: None
REF: Reference
LOT No: Lot Number
MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

| | |
|---|---|
| EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C | Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com |
|---|---|

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optical Switches, Transmissive, Phototransistor Output](#) *category:*

Click to view products by [Everlight](#) *manufacturer:*

Other Similar products are found below :

[LTH-301-07](#) [LTH-301-23](#) [E3C-X2C](#) [E3S-LS20B4S1](#) [RPI-0125B](#) [RPI-2501](#) [KRA021](#) [LTH-309-08](#) [HOA1961-055](#) [RPI-0128T81](#) [LTH-306-01](#) [EESX677C1JR01M](#) [ZIR-3528C-14-Z2](#) [RPI-125](#) [RPI-243](#) [EE-SX153](#) [EE-SX675P-WR 1M](#) [EE-SX971-C1](#) [OPB806](#) [OPB853A3](#) [EE-SX910-R 1M](#) [GP1S396HCP0F](#) [EE-SX1128](#) [EE-SV3-B](#) [EE-SJ3-D](#) [RPI-0226](#) [EE-SX951P-W 1M](#) [EE-SX954-W 1M](#) [EE-SX672R](#) [EE-SX954P-W 1M](#) [EE-SX952-R 1M](#) [EE-SX953-W 1M](#) [EE-SX670P-WR 1M](#) [EE-SX952P-W 1M](#) [LTH-301-32](#) [OPB867T55](#) [OPB842W55Z](#) [OPB370L55](#) [EE-SX1321](#) [GP1S396HCPSF](#) [EE-SV3-C](#) [OPB860T55](#) [OPB872T55](#) [EE-SX675-WR 1M](#) [EESX674PWR1M](#) [EE-SX951-R 3M](#) [EE-SX952-W 1M](#) [OPB859](#) [RPI-0352E](#) [ST150\(ZD\)](#)