



DEVICE NUMBER : DTD-095-001 REV : 1.0
ECN : _____ PAGE : 1/7

1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Features :

- Fast response time
- High photo sensitivity
- Small junction capacitance

■ Description :

- PD95-21B/TR7 is a high speed and high sensitive PIN photodiode miniature top view lens SMD package and it is molded in a black plastic. The device is spectrally matched with the infrared emitting diode.

■ Applications :



- High speed photo detector
- Copier
- Camera
- Optoelectronic switch
- Infrared applied system

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PD	Silicon	Black

1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Package Dimensions :

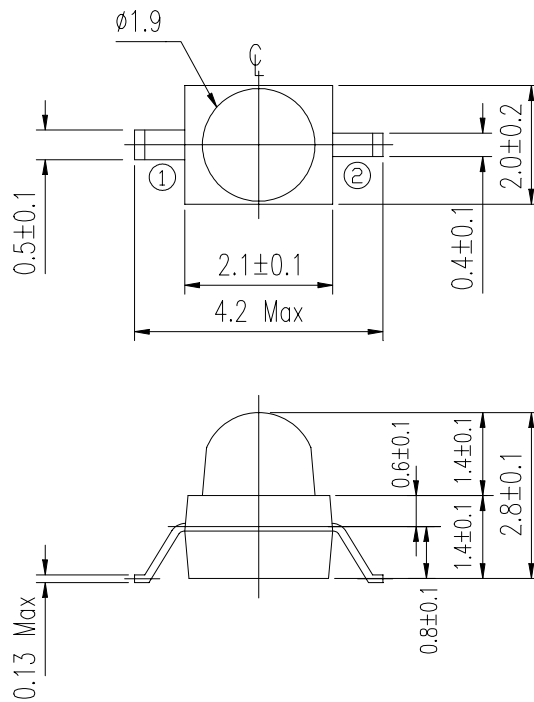

■ Notes :

1. All dimensions are in millimeter.
2. General Tolerance: ± 0.1 mm
3. Lens color : Black .
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
6. When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTD-095-001 REV : 1.0
 ECN : _____ PAGE : 3/7

1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Absolute Maximum Ratings at T_A = 25°C

Parameter	Symbol	Rating	Unit	Notice
Reversr Voltage	V _R	32	V	
Operating Temperature	Topr	-25 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +85	°C	
Lead Soldering Temperature	Tsol	260	°C	
Power Dissipation at(or below) 25°C Free Air Temperature	Pc	150	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Rang of Spectral Bandwidth	$\lambda_{0.5}$	----	730-1200	----	nm	----
Wavelength of Peak Sensitivity	λ_p	----	980	----	nm	----
Open-Circuit Voltage	V _{OC}	----	0.42	----	V	E _e =5mW/cm ² λ p=940nm
Short-Circuit Current	I _{SC}	----	15	----	μA	
Reverse Light Current	I _L	----	15	----	μA	E _e =5mW/cm ² λ p=940nm V _R =5V
Dark Current	I _D	----	----	10	nA	E _e =0mW/cm ² V _R =10V
Reverse Breakdown Voltage	B _{VR}	32	170	----	V	E _e =0mW/cm ² I _R =100 μA
Total Capacitance	C _t	----	5	----	pF	E _e =0mW/cm ² f=1MHZ V _R =5V
Rise Time	t _r	----	6	----	nS	R _L =1000Ω V _R =10V
Fall Time	t _f	----	6	----		



1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Typical Electrical/Optical/Characteristics Curves :

Fig. 1 Power Dissipation vs. Ambient Temperature

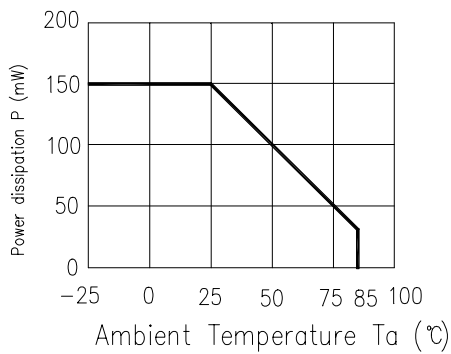


Fig.2 Spectral Sensitivity

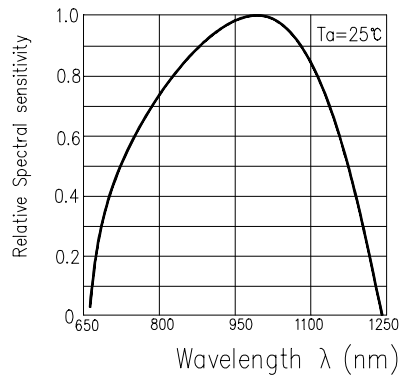


Fig.3 Dark Current vs. Ambient Temperature

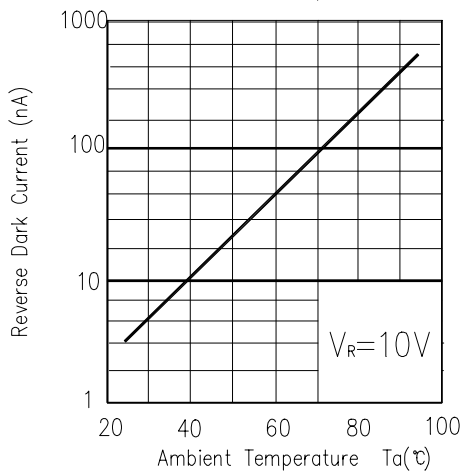


Fig.4 Reverse Light Current vs. E_e

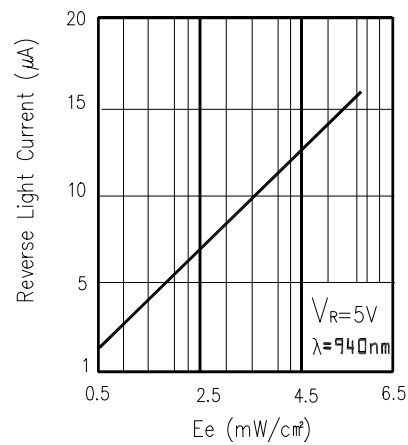


Fig.5 Terminal Capacitance vs. Reverse Voltage


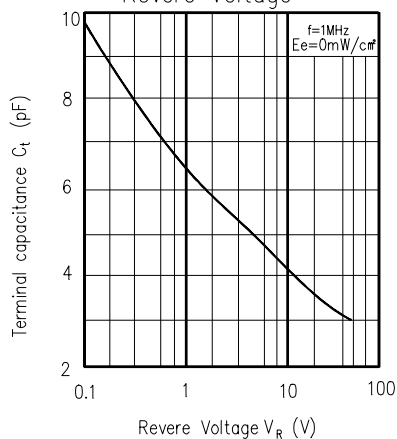


Fig.6 Response Time vs. Load Resistance



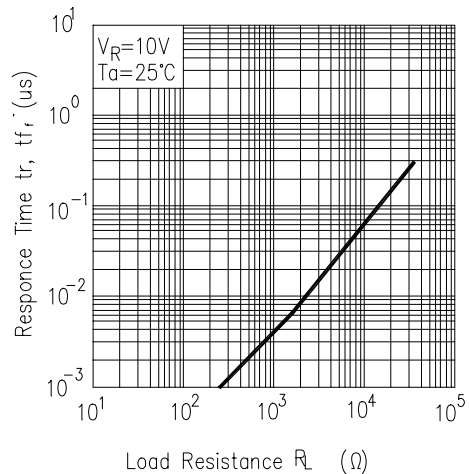

EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTD-095-001 REV : 1.0
 ECN : _____ PAGE : 5/7

1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycle	Sample Size	Failure Judgement Criteria	Ac/Re
1	REFLOW	TEMP : 240°C ± 5 °C 5 sec	6 Min	22 PCs	More than 90% of lead to be covered by soldering	0/1
2	Temperature Cycle	H : +85°C 30 min ↑ 5 min ↓ L : -55°C 30 min	50 cycle	22 PCs	$I_L \leq L \times 0.8$ L:Lower specification limit	0/1
3	Thermal Shock	H : +100°C 5 min ↑ 10 sec ↓ L : -10°C 30 min	50 cycle	22 PCs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 PCs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 PCs		0/1
6	DC Operating Life	$V_R=5V$	1000 hrs	22 PCs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 PCs		0/1






EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTD-095-001 REV : 1.0
ECN : _____ PAGE : 7/7

1.9mm Silicon PIN Photodiode

MODEL NO : PD95-21B/TR7

■ Packing Specifications

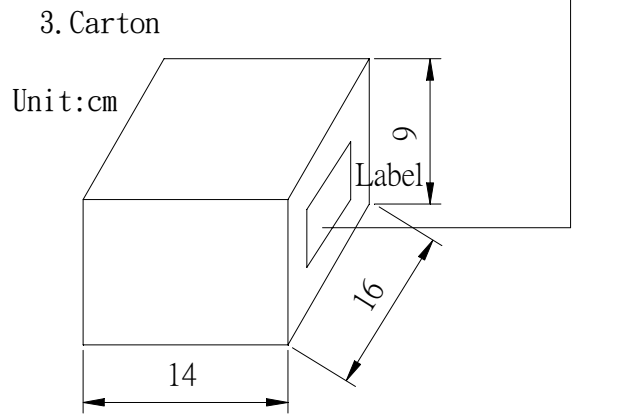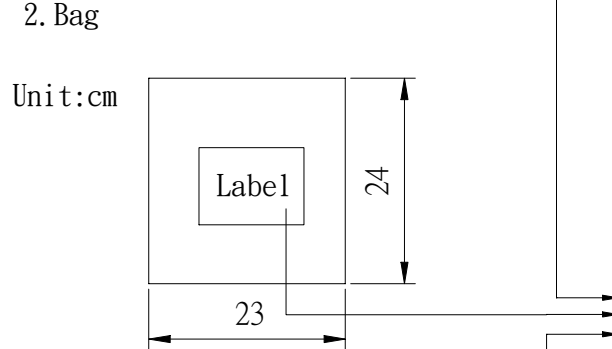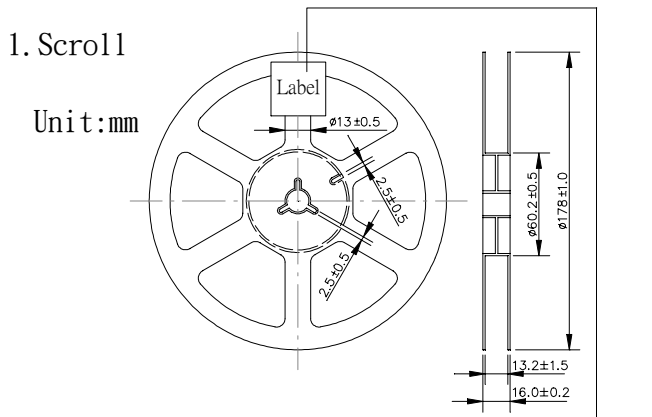

CPN:
P/N:
PD95-21B/TR7

QTY:
LOT NO:

CAT:
HUE:
REF:

MADE IN TAIWAN

CPN : Customer's Production Number
P/N : Production Number
QTY : Packing Quantity
CAT : Ranks
HUE : Peak Wavelength
REF : Reference
LOT NO : Lot Number
MADE IN TAIWAN : Production place

■ Packing Quantity Specification

- 1.1000 Pcs/1Volume , 1Volume/1Bag
- 2.10Bags/1Carton

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photodiodes](#) category:

Click to view products by [Everlight](#) manufacturer:

Other Similar products are found below :

[LTR-526AD](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [67-21SYGC-S349-TR8](#) [SFH 2200 A01](#) [HFD3081-108-XBA](#) [BPW 34 S E9601](#)
[SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BPV23FL](#) [BPW 34 FAS](#) [BPW 34 FS](#) [IG17X1000S4I](#) [IG22X250S4I](#) [VTD205H](#) [VTD205KH](#)
[VTP1220FBH](#) [VTP1232FH](#) [VTP4085H](#) [SFH 2400](#) [OP913WSL](#) [OPF794](#) [PD70-01C/TR7](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#)
[BPV23NF](#) [OP905](#) [LTR-516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [SFH 2500 FA](#) [SFH 213 FA](#) [PD15-22C/TR8](#) [VEMD5510C](#) [SFH 2200](#)
[VEMD5510CF](#) [APS5130PD7C-P22](#) [SAH230M](#) [SAH230M2](#) [SAH500M2](#) [BP 104 FS](#) [BPV22F-AS12](#) [BPW 21](#) [BPW 34 SR-Z](#) [BPX 65](#)
[HSDL-5400#011](#)