


Digital Sound Level Meters

✓ **Two models for general purpose and high accuracy Type II measurements**
With 1.5dB or 2dB accuracy

Features:

- A and C weighting
- High and Low measuring ranges:
Model 407735 - Low (35 to 100dB), High (65 to 130dB)
Model 407736 - Low (35 to 90dB), High (75 to 130dB)
- 0.1dB resolution
- Fast/slow response
- Max Hold with reset button
- Model 407736 meets ANSI and IEC 651 Type II standards
- Large 0.5" 3-1/2 digit LCD display
- Built-in calibration check (94dB)
- Tripod mount and analog DC/AC conditioned outputs of 10mV/dB
- Utilizes 0.49"(12.3mm) condenser microphone
- Dimensions: 9.5 x 2.7 x 1" (241 x 69 x 25mm)
Weight: 7.6 oz (215g)
- Complete with hard vinyl case and 9V battery

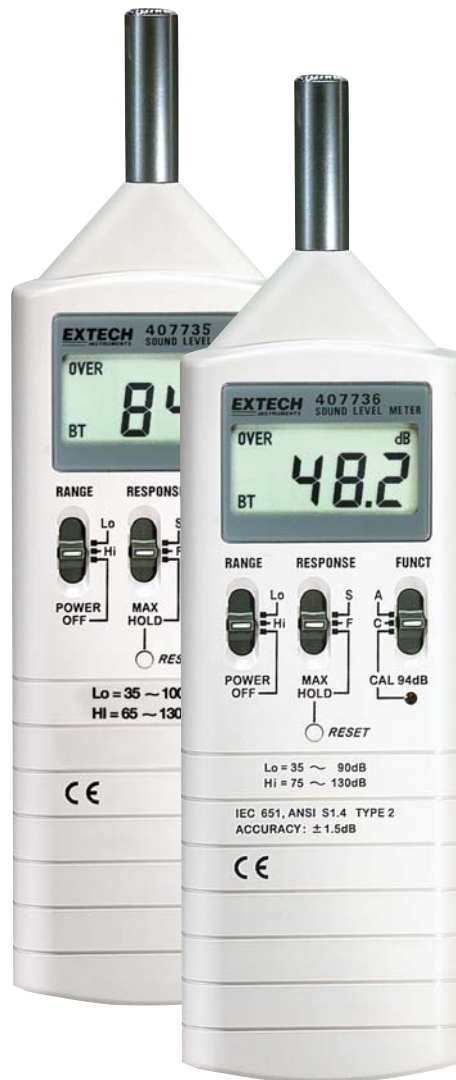

Optional 94/114dB
Calibrator

Ordering Information:

407735.....Digital Sound Level Meter, 2dB accuracy
407735-NIST407735 with NIST Certificate
407736.....Digital Sound Level Meter, 1.5dB accuracy
407736-NIST407736 with NIST Certificate
407766.....94/114dB Sound Level Calibrator
40705X.....AC/DC Recorder Output Cable



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Extech](#) manufacturer:

Other Similar products are found below :

[PT400](#) [LT45](#) [EX365](#) [MO260](#) [MO280](#) [871515](#) [PH105](#) [PH113](#) [HD350](#) [HD700](#) [RH300-CAL](#) [140000](#) [AN300](#) [AN-P1](#) [149116](#) [149118](#) [DV40](#)
[EA11A](#) [BT100](#) [SD800](#) [SDL600](#) [EX363](#) [EX505](#) [SW810A](#) [AN200](#) [AN320](#) [PH110](#) [PH220](#) [PRC15](#) [PRC30](#) [PRT200](#) [PT-30](#) [HD500](#) [RH490](#)
[RH522](#) [380395](#) [380941](#) [380975](#) [MA1500](#) [MA3010](#) [407026](#) [407736](#) [412300](#) [42275](#) [42540](#) [TL726](#) [TL807C](#) [44550](#) [45118](#) [HW30](#)