


Big Digit Hygro-Thermometer

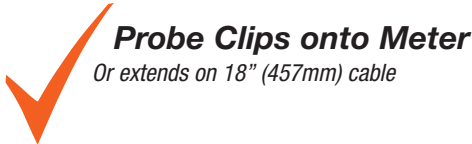

Probe Clips onto Meter
Or extends on 18" (457mm) cable

Features:

- Max/Min with reset function
- Rear calibration adjustment pot
- Humidity: 10 to 99% RH
- Temperature: 14 to 140°F (-10 to 60°C)
- Optional RH calibration bottles
- Accuracy: $\pm 4\%$ RH; $\pm 1^\circ\text{C}/1.8^\circ\text{F}$
- Dimensions: 4.3 x 3.9 x 0.78" (109 x 99 x 20mm)
- Weight: 6oz (169g)
- Complete with built-in stand, mounting bracket, sensor, and 1 AAA battery; optional calibration salt bottles



RH300-CAL Optional calibration salt bottles

Ordering Information:

445715Big Digit Remote Probe Hygro-Thermometer
445715-NIST445715 with Calibration Traceable to NIST.
RH300-CALOptional 33% and 75% RH calibration standards



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [S-11](#) [FLUKE-LDG](#) [382153](#) [FM100](#) [RH210](#) [382253](#) [MO290-P](#)
[GEO-CABLE-REEL-50M](#) [T197914](#) [RD300-L](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [IR31CE](#) [IR32BC](#) [IR33BC](#) [MP7217TC](#) [NGM-1](#) [SGX-](#)
[7NH3](#) [UT381](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-NmHc-100](#) [3.000.401](#) [AX-7535](#) [CS-9S6SS-A](#) [P 2800 A](#) [P 2801](#) [P 2802](#) [P 5039](#) [P 5130](#) [P](#)
[5055](#) [P 5060](#) [P 5065](#) [P 5086](#) [P 5090](#) [P 5110](#) [P 5115](#) [P 5135](#) [P 5140](#) [P 5145](#) [P 5150](#) [P 5160](#)