




EasyView™ Type K Single Input Thermometer

Large dual LCD display and Memory function

Simultaneously displays current temperature and Max, Min, or Avg readings. Manually store and recall up to 150 readings for further analysis.

Features:

- Compact and rugged design with high contrast large LCD display
- Manually store/recall up to 150 readings
- Wide temperature range with 0.1°/1° resolution
- · Data Hold function freezes reading on display
- · Records Max/Min/Avg readings for later recall
- Offset key used for zero function to make relative measurements
- · Auto Power off with disable feature
- Low battery and overrange indication
- Complete with built-in stand, protective holster, general purpose Type K bead wire temperature probe (-4 to 482°F/-20 to 250°C) and 6 AAA batteries

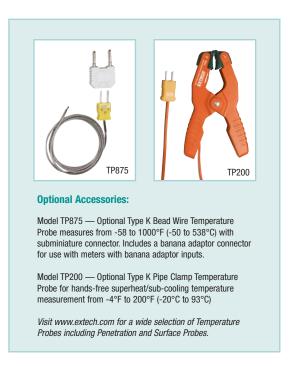



Specifications	
Temperature (Type K)	-58 to 1999°F (-50 to 1300°C)
Basic Accuracy	\pm (0.3%rdg +2°F); \pm (0.3%rdg +1°C)
Resolution	0.1°/1°
Memory	Manual store/recall up to 150 readings
Dimensions	5.9 x 2.8 x 1.3" (150 x 72 x 35mm)
Weight	8.3oz (235g)

Ordering Information:

EA11AEasyView™ Type K Single Input Thermometer
EA11A-NIST EasyView™ Type K Single Input Thermometer w/ Calibration Traceable to NIST
TP870Type K Bead Wire Temperature Probe (482°F/250°C)
TP875Type K Bead Wire Temperature Probe (1000°F/538°C)
TP200 Type K Pipe Clamp Probe (200°F/93°C)
409996Soft Vinyl Pouch Carrying case

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Environmental Test Equipment category:

Click to view products by Extech manufacturer:

Other Similar products are found below:

CW40 F150C10E3DRT F150LTC20 F150CD10E2 F150L75 F150LRS S-11 FLUKE-LDG 382153 FM100 RH210 382253 MO290-P

GEO-CABLE-REEL-50M T197914 RD300-L IR11BD IR11GM IR12GM IR21BD IR31CE IR32BC IR33BC MP7217TC NGM-1 SGX
7NH3 UT381 F150-SLC50 AW-CO-1000 AW-NmHc-100 3.000.401 AX-7535 CS-9S6SS-A P 2800 A P 2801 P 2802 P 5039 P 5130 P

5055 P 5060 P 5065 P 5086 P 5090 P 5110 P 5115 P 5135 P 5140 P 5145 P 5150 P 5160