AMI SERIES



BOLT IN AUTOMOTIVE FUSES

SPECIFICATIONS:

Applications: Power distribution protection for automotive systems. Consult factory for available fuse-holders.

Current Rating: 30-150A. Voltage Rating: 32VDC.*

Interrupt Rating: 2000A @ 32VDC.

Housing Material: UL-Rated 94V-0 thermoplastic.

Terminal Material: Tin-plated brass. **Mounting:** Max torque of 35in-lb (4Nm).


Marking: Color-coded housings for each amperage.

*Consult factory for higher voltage fuses.

TIME-CURRENT SPECIFICATIONS

% of	Opening Time	
Rating	Minimum	Maximum
100 110	100 hrs 4 hrs	
150	90 s	3600 s
200	5 s	100 s
300 500	0.3 s 0.1 s	10 s 1 s

PART NUMBERING SYSTEM



030 - 30 amps (orange) 040 - 40 amps (It. green) 050 - 50 amps (red)

060 - 60 amps (yellow)

070 – 70 amps (brown)


080 – 80 amps (white)


100 – 60 amps (while)

125 – 125 amps (pink)

150 - 150 amps (gray)

DIMENSIONS (Dims. shown are for reference only. Consult factory for latest prints)



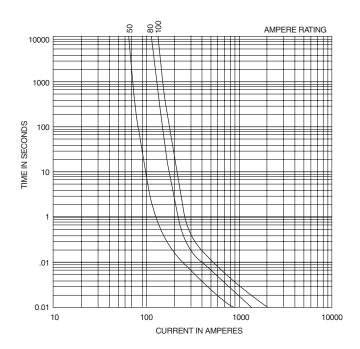

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

HBO-10 HBO-100 HBO-150 HBO-25 HBO-40 HBO-50 AFX-150 AT-10 AT-30 AT-5 ATM-4LP ACL-30 ACL-50 AFX-50 HBO-15 HBO-70 AT-20 AT-25 AT-3 142.7010.5502 BK-HBH-I BK-AGX-1-2 142.0020.6152 FMM-15 0695030.PXPS 0695040.PXPS 0297003.WXT 0695025.PXPS 0695015.PXPS 0200300 02400106P 0297002.WXT 0297004.WXT 0297010.WXT 0297015.WXT 0297020.WXT 0297025.WXT 0297030.WXT 0297