

Chip Arrays (2512061027Y0A4)



Part Number: 2512061027Y0A4

MULTI- LAYER TAPE & REEL

Part Number System: Example 2512066007Y0A4

25	1206	600	7	Y	0	A4
Chip Suppression Component	Package Size	Impedance Code	Packaging Code	Material Code	Current Code	Array 4 Lines
		600 = 60 Ω	6= Bulk Packed 7= Taped and Reeled 7" Reel 8= Taped and Reeled 13" Reel	Y = Std Signal Speed	0 < 1A	

Fair- Rite offers an effective cost and real estate reduction by our line of chip arrays. Four chip beads, packaged in a 1206 (3216) size, for suppression of conducted EMI where size is at a premium.

Chip arrays have plated contacts, 100% matte tin over a nickel undercoating.

The arrays can accommodate both reflow and wave soldering technologies.

Recommended storage and operating temperature range is -55 °C to 125 °C.

Chip Bead Kit (part number 0199000018) contains the 600 ohm 4 line chip array.

Packaging Options:

- Chip arrays are supplied taped and reeled.

Suggested land patterns are in accordance to the IPC-7351.


Weight: 0.03 (g)

Package Size: 1206 (3216)

Dim	mm	mm tol	nominal inch	inch misc.
A	0.8	±0.20	0.032	—
B	1.6	±0.20	0.063	—
C	3.2	±0.20	0.126	—
D	0.3	±0.20	0.011	—
E	0.8	±0.10	0.032	—
F	0.04	±0.15	0.018	—

Reel Information				
Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel	Parts 14" Reel
8	4	3000	-	-

Land Patterns				
V	W	X	Y	Z
0.70 (0.028")	1.30 (0.051")	0.50 (0.020")	0.60 (0.024")	0.80 (0.032")

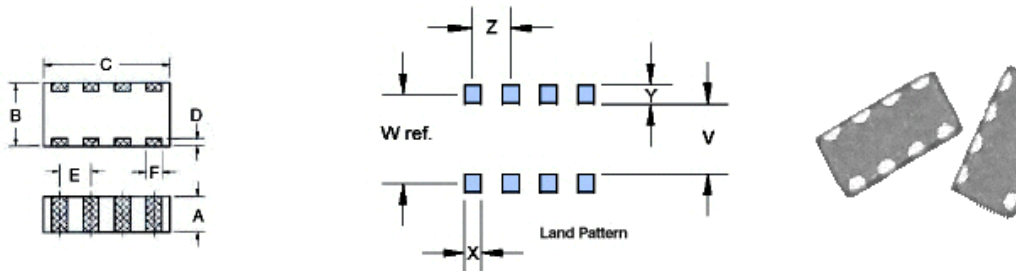

Pkg. Size	A	B	C	D	E	F	Wt. (g)	Land Patterns					Reel Info	
								V	W (ref)	X	Y	Z	Tape Width mm	Pitch mm
1206 (3216)	0.8±0.2 0.032	1.6±0.2 0.063	3.2±0.2 0.126	0.3±0.2 0.011	0.8±0.1 0.032	0.45±0.2 0.018	0.03	0.7 0.028	1.3 0.051	0.5 0.020	0.6 0.024	0.8 0.032	8	4

Chart Legend
+ Test frequency

Typical Impedance (Ω)	
50 MHz	770
100 MHz ⁺	1000 ±25%
500 MHz	400
1000 MHz	200


Electrical Properties	
Max DCR (Ω)	0.7
Max Current (mA)	50

Chip arrays are controlled for impedance. The impedance values listed are typical values. The nominal impedance with a +/- 25% tolerance is specified for the + marked 100 MHz frequency. Chip arrays are measured for impedance on the HP 4291A and fixture HP 16192A.


The maximum voltage between adjacent beads is 5V.

Chip arrays are 100% tested for impedance and dc resistance.

2512061027Y0A4

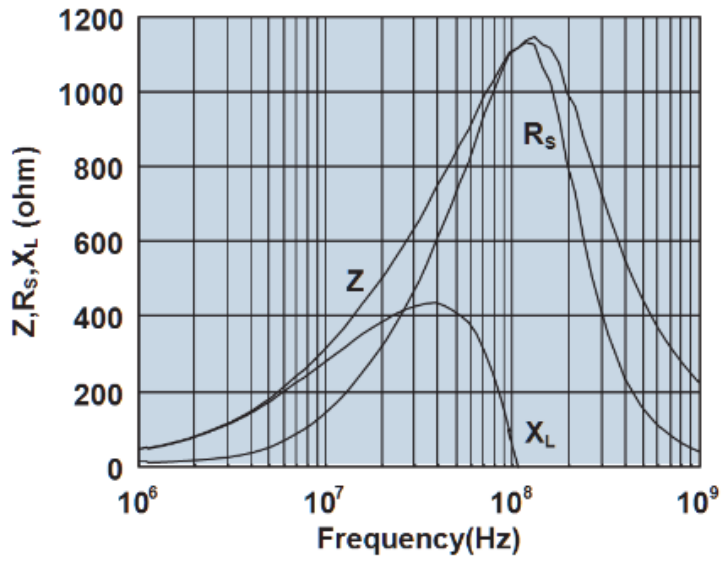

Impedance, reactance, and resistance vs. frequency.

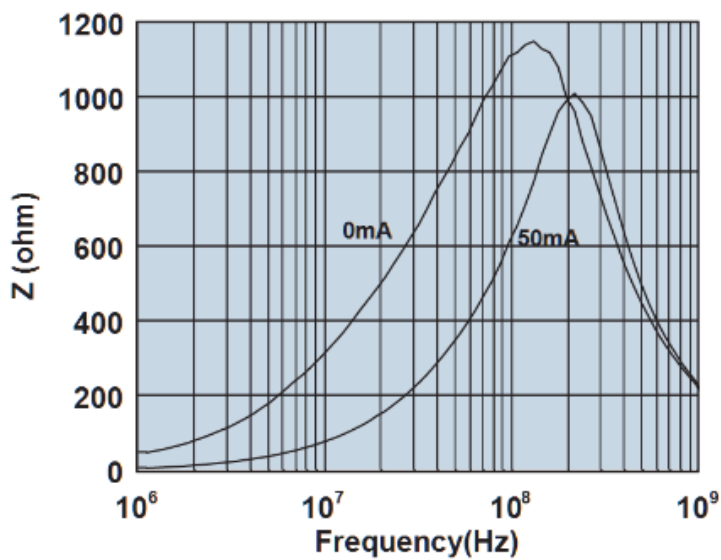

Impedance vs. frequency with dc bias.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Kits](#) category:

Click to view products by [Fair-Rite](#) manufacturer:

Other Similar products are found below :

[EMC-A202](#) [RFID Flexield SAMPLE SET-E1](#) [KIT02](#) [KIT04](#) [FSLK-CARRY](#) [KIT03](#) [KIT18](#) [EKDMGN03A-KIT](#) [EKDMAT01A-KIT](#)
[EKDMAT03-KIT](#) [EKDMGN02A-KIT](#) [742700](#) [0199000028](#) [0199000032](#) [0199000034](#) [742841](#) [7449984](#) [7449983](#) [0199000043](#) [EMC-A201](#)
[742722](#) [782013](#) [7449982](#) [744998](#) [EK33B0011](#) [0199001401](#) [B72482S9999X2](#) [0199000005](#) [0199000017](#) [0199000018](#) [0199000019](#)
[0199000024](#) [0199000025](#) [0199000027](#) [0199000030](#) [0199000031](#) [0199000033](#) [0199000036](#) [0199000039](#) [0199010301](#) [0199016551](#)
[0199000041](#) [0199000044](#) [199000041](#) [0199016051](#) [S01-806005KIT](#) [EMI ENG KIT 01](#) [EMI ENG KIT 02](#) [FXS ENG KIT 01](#) [FXS ENG KIT](#)
[02](#)