

EMI Suppression Beads (2673000101)



Part Number: 2673000101

73 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002'').

Fair- Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.13 (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A | 3.5 | ±0.20 | 0.138 | _ |
| В | 1.3 | ±0.10 | 0.051 | _ |
| С | 3.25 | ±0.25 | 0.128 | |








Chart Legend

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note □How to choose Ferrite Components for EMI Suppression □.


| Typical Impedance | (Ω) |
|---------------------|------------|
| 1 MHz | 13.3 |
| 5 MHz | 28 |
| 10 MHz ⁺ | 35 |
| 25 MHz ⁺ | 34 |

| Electrical | Properties |
|------------|------------|
| H(Oe) | 2 |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

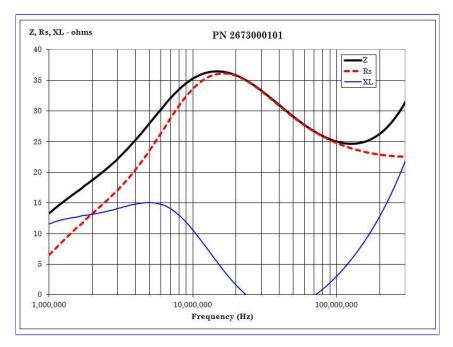

CSV Download

Fair- Rite Products Corp. One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 845-895-2055 Fax: 845-895-2629 www.fair- rite.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below:

FB73-422 FX28R0984-0 FX28R0984-2 AB 3X2X3SM 2643164251 2643665709 2661626402 LB 2.8X4.5U 28R1127 28R1260 28R1575 SM28R0760 2631006302 2643165451 2643178351 28R0760 4327 030 11761 SS7X4X3W 4327 030 16141 2643103102 2643164151 2943666671 2643163851 AB4X2X6SM 28B1101 SM28R1575 2643625902 2643626102 28B0268-000 28B0375-100 28B0375-300 28B0500-100 28B0562-000 28B0562-200 28B0625-100 28B1020-100 28B1417-200 28R1101-000 28R1102-100 28R1127-500 28R0453-200 28R0669-000 28R0898-200 28R0756-200 28R0480-000 28R1127-000 28R0984-200 28R0592-010 28R0756-000