Fair-Rite Products Corp.

Your Signal Solution®

# EMI Suppression Beads (2673012401)



Part Number: 2673012401

73 SHIELD BEAD

Explanation of Part Numbers:

Digits 1 & 2 = Product Class

– Digits 3 & 4 = Material Grade

– Last digit 1= Not Burnished 2 = Burnished

- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002'').

Fair- Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

### Weight: 0.02 (g)

Bil		8/						
Dim	mm	mm tol	nominal inch	inch misc.				
А	1.55	-0.10	0.059	_		1	///////////////////////////////////////	
В	0.95	+0.15	0.04	_	((+))	в		
С	4.2	-0.25	0.16	_		+		
					- A -		- c	

### **Chart Legend**

+ Test frequency


• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note  $\Box$  How to choose Ferrite Components for EMI Suppression  $\Box$ .

Typical Im	pedance	$e(\Omega)$			
1 MHz		4			
5 MHz		9.5			
$10 \text{ MHz}^+$		14			
$25 \text{ MHz}^+$		20			
Electrical Properties					
H(Oe)	3.3				

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

#### Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

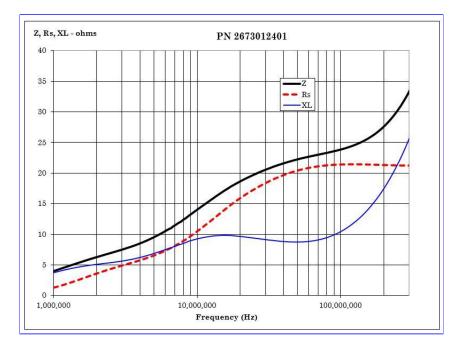

CSV Download

Fair- Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629[email\_protected]]www.fair- rite.com

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below :

 FB73-422
 FX28R0984-0
 FX28R0984-2
 AB 3X2X3SM
 2643164251
 2643665709
 2661626402
 LB 2.8X4.5U
 28R1127
 28R1260
 28R1575

 SM28R0760
 2631006302
 2643165451
 2643178351
 28R0760
 4327 030
 11761
 SS7X4X3W
 4327 030
 16141
 2643103102
 2643164151

 2943666671
 2643163851
 AB4X2X6SM
 28B1101
 SM28R1575
 2643625902
 2643626102
 28B0268-000
 28B0375-100
 28B0375-300

 28B0500-100
 28B0562-000
 28B0562-200
 28B0625-100
 28B1020-100
 28B1417-200
 28R1101-000
 28R1127-500
 28R0453 

 200
 28R0669-000
 28R0756-200
 28R0480-000
 28R1127-000
 28R0984-200
 28R0592-010
 28R0756-000