# Multi- Aperture cores (2843002302)



Part Number: 2843002302

43 MULTI- APERTURE CORE

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi- aperture cores are supplied burnished.

Our "Multi- Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

## Catalog Drawing 3D Model

<u>Weight:</u> 0.1 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 3.45 | ±0.25  | 0.136        | _          |
| В   | 2.35 | ±0.25  | 0.093        | _          |
| C   | 2    | ±0.15  | 0.079        | _          |
| Е   | 1.45 | ±0.10  | 0.057        | _          |
| Н   | 0.75 | +0.25  | 0.034        | _          |






Figure 1

## Chart Legend

+ Test frequency


| Typical Impedance (  | Ω) |
|----------------------|----|
| 25 MHz               | 30 |
| 100 MHz <sup>+</sup> | 46 |

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

### **Catalog Drawing**

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

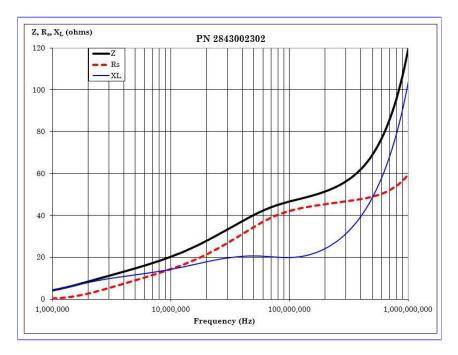

### CSV Download

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Toroids / Ferrite Rings category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below:

28B0138-7 28B0200-4 28B0250-1 28B0137-3 432202094771 4327 018 35221 432703033201 4327 030 37511 4327 030 37911 4327 030 57161 432202101631 4327 030 12521 5343232001 5943000901 5961004101 28B1250-2 28B2000-3 28B1387-1 28B2400-0 5961000811 5968003801 5975011101 5977000501 5975001821 28B0355-0 M-060 CST29/19/7.5-4S2 T9X8X5 4077485111 TN10/6/4-3F3 TN14/9/5-3F3 MP-050125-2 TX10/6/4-3E5 MS-050125-2 MS-065075-2 MS-106075-2 MS-130060-2 MS-157060-2 MS-157075-2 MS-157125-2 MS-184026-2 MS-184075-2 MS-184125-2 MS-225014-2 MS-226014-2 MS-226125-2 MS-300014-2 RT-100-60-30 RT-100-60-80 RT-100-70-50