

FC-SCT1010-Series-40A.Current Sense Transformers

Height: 14.0mm Max

Current Rating: up to 40A

Insulation: Reinforced, 6.5mm creepage , Isolation AC3750Vrms UL


Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +125°C


It is used as DC current transformer for various electronic device detection




1. Dimensions:mm

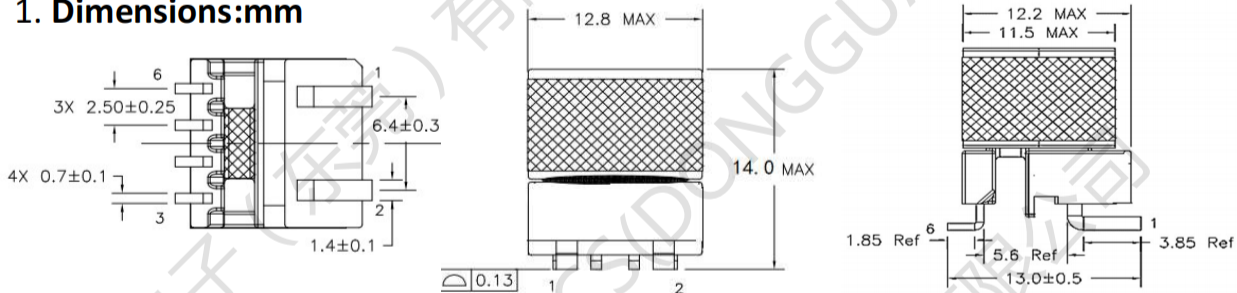

2.Schematic:

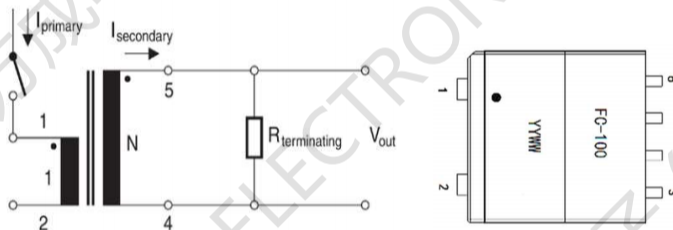

3.PCB,LAYOUT RECOMMENDATION

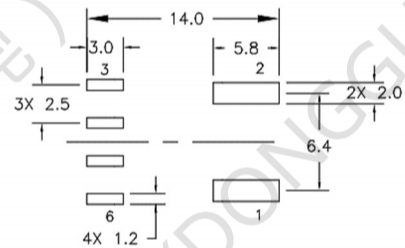

4.Electrical Characteristics :

| Part Number | Turns Ration | Current Rating NP1-2,(A) | Secondary Inductance (PIN5-4-mH min) | DCR MAX) | | Hipot (ACV _{RMS}) Np-Ns |
|-----------------------|--------------|-----------------------------|---|----------------------|-----------------------|---|
| | | | | Primary (1-2(mΩ)) | Secondary (5-4(Ω)) | |
| FC-SCT1010-1:50T-40A | 1:50 | 40 | 1.8 | 0.5 | 1.5 | 3750V |
| FC-SCT1010-1:70T-40A | 1:70 | 40 | 3.5 | 0.5 | 2.0 | 3750V |
| FC-SCT1010-1:100T-40A | 1:100 | 40 | 7.0 | 0.5 | 2.5 | 3750V |
| FC-SCT1010-1:125T-40A | 1:125 | 40 | 11.0 | 0.5 | 3.0 | 3750V |
| FC-SCT1010-1:150T-40A | 1:150 | 40 | 15.0 | 0.5 | 3.5 | 3750V |
| FC-SCT1010-1:180T-40A | 1:180 | 40 | 25.0 | 0.5 | 9.0 | 3750V |
| FC-SCT1010-1:200T-40A | 1:200 | 40 | 30.0 | 0.5 | 9.5 | 3750V |

It is used as DC current transformer for various electronic device detection.

Inductance: 10KHZ/0.25V, To calculate value of terminating resistor (Rt) use the following formula: $R_t (V) = V_{ref} * N / (I_{peak_primary})$

The peak flux density of the device must remain below 2200 Gauss. To calculate the peak flux density for uni-polar current use following formula: $B_{pk} = 8.85 * V_{ref} * (Duty_Cycle_Max) * 105 / (N * Freq_kHz)$

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FANGCHENG manufacturer](#):

Other Similar products are found below :

[DLSF1010-12mH-L-S](#) [FC20100310](#) [FC20150210](#) [FC20330210](#) [FC20470210](#) [FC20680210](#) [FC-ACT25-50A-1000T-1T](#) [FC-CT9825-100T-40A](#) [FC-CT9825-200T-40A](#) [FC-DL2018D-5.0mH-20A-L](#) [FC-DLF1010-101B-LF](#) [FC-DLF1015-161B-LF](#) [FC-DLF4030-141-120A-LF](#) [FC-DLFH2520-102Y-LF](#) [FC-DLFH2520H-102Y-LF](#) [FC-DLSF1010-5mH-3.5A-L](#) [FC-DLSF2015W-30mH-1.5A-LF](#) [FC-DLSF2020L-30mH-1.5A-LF](#) [FC-DLSF2515-1.0mH/30A-L](#) [FC-DSL1212-L-10.0mH-3A](#) [FC-HLF2010H-50uH-20A-LF](#) [FC-HLF2018-15mH-10A-LF](#) [FC-HLF2018-5mH-25A-LF](#) [FC-LCM1513-301](#) [FC-LCM1513-551](#) [FC-LCM1513-701](#) [FC-LCM3225-102](#) [FC-LCM3225-421](#) [FC-LCM3225-501](#) [FC-LCM3225-701](#) [FC-LCM4532-102](#) [FC-LCM4532-152](#) [FC-LCM4532-421](#) [FC-LCM4532-701](#) [FC-LCM7060-132](#) [FC-LCM7060-501](#) [FC-LF1608-3.5mH-6.0A-L](#) [FC-LSFW4532-102S](#) [FC-SCM1040-150M-LF](#) [FC-SCT1010-1:125T-40A](#) [FC-SCT1010-1:150T-40A](#) [FC-SCT1010-1:180T-40A](#) [FC-SCT1010-1:200T-40A](#) [FC-SCT1010-1:50T-40A](#) [FC-SCT1010-1:70T-40A](#) [FC-SCT1090-100T-50A](#) [FC-SCT1090-200T-50A](#) [FC-SCT1090-300T-50A](#) [FC-SCT2010-100T](#) [FC-SCT2010-200T](#)