

FC-SCT5.0 –Series Current Sense Transformers

Height: 5.5mm Max

It is used as DC current transformer for various electronic device detection

Current Rating: up to 20A

Frequency Range: 100 kHz, 0.1 Vrms


Low Primary DCR version

Ambient temperature -40° C to +85° C

Storage temperature Component: -40° C to +125° C




1. Dimensions:mm

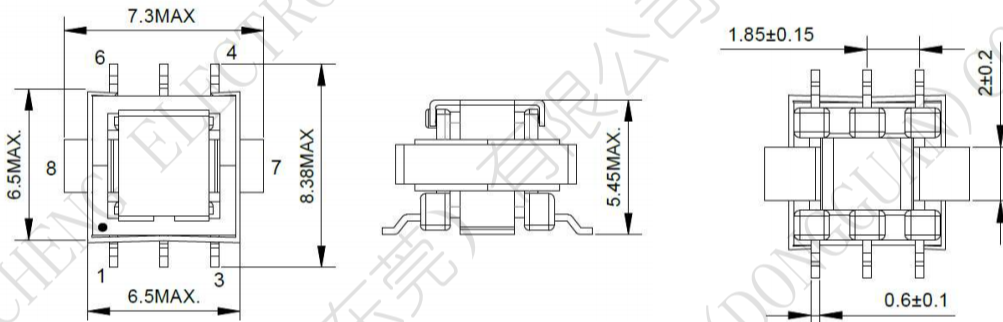


2.Schematic:



3.Application:

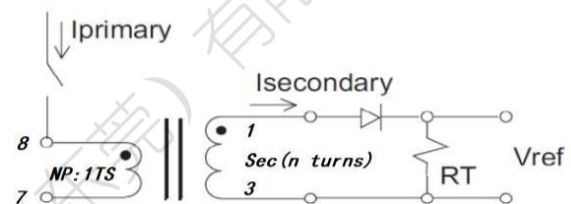

3.LAYOUT RECOMMENDATION

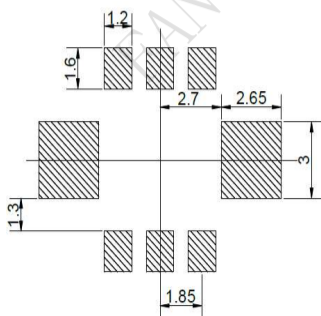

$$R_t (W) = V_{ref} * N / (I_{peak_primary})$$




It is used as DC current transformer for various electronic device detection

5. ELECTRIC CHARACTERISTICS)

Part Number	Turns Ration	Current Rating ₂ NP8-7,(A)	Secondary Inductance (mH min)	DCR (mΩ MAX)		Hipot (V _{RMS})
				Primary (8-7)	Secondary (1-3)	Np-Ns
FC-SCT5.0-1:20-20A	1:20	20	0.08	0.75	550	1500V
FC-SCT5.0-1:30-20A	1:30	20	0.18	0.75	870	1500V
FC-SCT5.0-1:40-20A	1:40	20	0.32	0.75	1140	1500V
FC-SCT5.0-1:50-20A	1:50	20	0.5	0.75	1500	1500V
FC-SCT5.0-1:60-20A	1:60	20	0.72	0.75	2250	1500V
FC-SCT5.0-1:70-20A	1:70	20	0.98	0.75	4750	1500V
FC-SCT5.0-1:100-20A	1:100	20	2.0	0.75	5500	1500V
FC-SCT5.0-1:125-20A	1:125	20	3.0	0.75	6500	1500V

Electrical Specifications @ 25°C — Operating Temperature -40°C to +125°C .

6. Application circuit and pinning

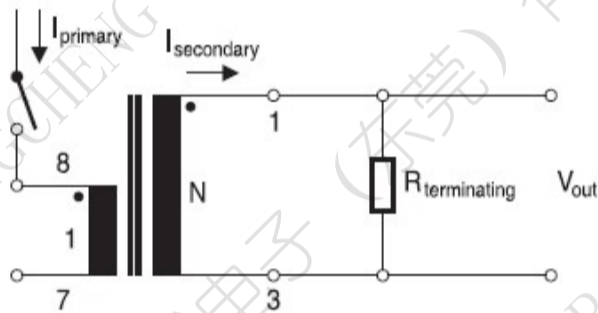

$$B_{max} = \frac{V_{sense,max} \cdot \delta_{max}}{n_s \cdot A_e \cdot f_{osc}}$$

$$R_T = \frac{V_{sense,max} \cdot n_s}{I_{prim,max}}$$

With:1

B_{max} Maximum magnetic flux density in the ferrite core of the current sense transformer

V_{sense,max} Maximum output voltage of the measurement signal δ_{max} Maximum duty cycle

n_s Number of turns of the secondary winding of the current sense transformer

A_e Effective magnetic area of the ferrite core

f_{osc} Operating frequency of the switching operator IC

Typical value for A_e: 2.5 x 10⁻⁶ m²

Typical B_{max}: 200 m

With:2


R_T Resistance of burden resistor

V_{sense,max} Maximum output voltage of the measurement signal

n_s Number of turns on the secondary side of the CT

I_{prim,max} Maximum primary current (peak current)

7. Temperature Rise vs Current

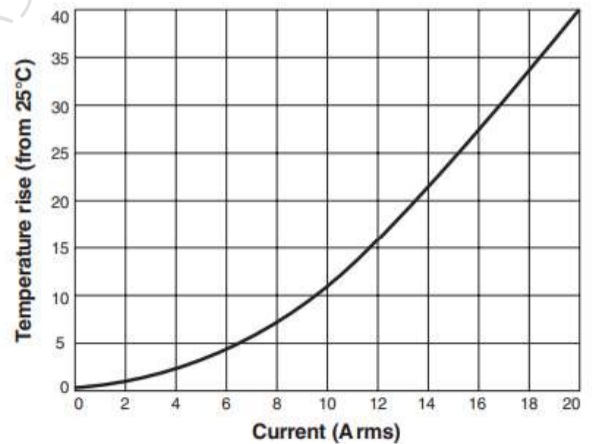

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FANGCHENG manufacturer](#):

Other Similar products are found below :

[DEP23-220M](#) [FC-SLF1813-251-6A-LF](#) [FC-ALX 5030D-2R2MT](#) [DPE3119-100M](#) [FC-ALX 6030D-1R5MT](#) [FC-DEM1623-220M](#) [FC-SCT1010-1:150T-40A](#) [FC-PFC1060-850M-B-L](#) [FC-DEM1623-150M](#) [FC-ALX 6050D-5R6MT](#) [FC-ALX 6050D-6R8MT](#) [FC-ALX 6020D-R20MT](#) [FC-ALX 6030D-1R0MT](#) [DPE3119-150M](#) [FC-PT3215B-330L](#) [FC-ALX 5030D-1R2MT](#) [FC-SE2915-120M](#) [FC-ALX 4030D-R33MT](#) [FC-DLH2315-150M](#) [DEP23-470M](#) [FC-ALX6020D-1R1MT](#) [FC-ALX6020D-R90MT](#) [FC-ALX 6030D-1R2MT](#) [DEP17A-220](#) [FC-TCH1065-230Y-T](#) [FC-ALX 6030D-R68MT](#) [FC-SLF1285-5.0mH-2.0A-LF](#) [FC-ALX 5030D-R80MT](#) [DEP1410-220](#) [FC-DR1207-101MT](#) [FC-DLSF1010-5mH-3.5A-L](#) [FC-SLF1813-10mH-2.5A-LF](#) [FC-ST1390-R68M-50A-L](#) [FC-SLF2210-431-LF](#) [FC-DLF4030-141-120A-LF](#) [FC-SLF1810-901-LF](#) [FC-SCT1010-1:200T-40A](#) [FC-SCT1010-1:100T-40A](#) [FC-ALX 5030D-1R5MT](#) [FC-SCT1010-1:50T-40A](#) [FC-SCT1010-1:180T-40A](#) [FC-SCT1090-200T-50A](#) [FC-SCT1010-1:125T-40A](#) [FC-SCT1010-1:70T-40A](#) [FC-UU16-452-3.5A-LF](#) [FC-TSE050-5V-12V-T](#) [DEP17B-220M](#) [FC-HCM1190-R25-L](#) [FC-ST1390-R47M-50A-L](#) [DEP17A-100](#)