


Current Compensated Ring Core Double Chokes LCM7060-LCM1513-Series

Features:


- 1、 LCMrealizes big size and Hight current
- 2、 High Impedance and Excellent Frequency Characteristic.
- 3、 Self Electromagnetic Shielding.
- 4、 Low Magnetic Flux Leakage

Applications:

Used for power line noise suppression for any electronic devices.
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.




1.SHAPES AND DIMENSIONS Unit:mm

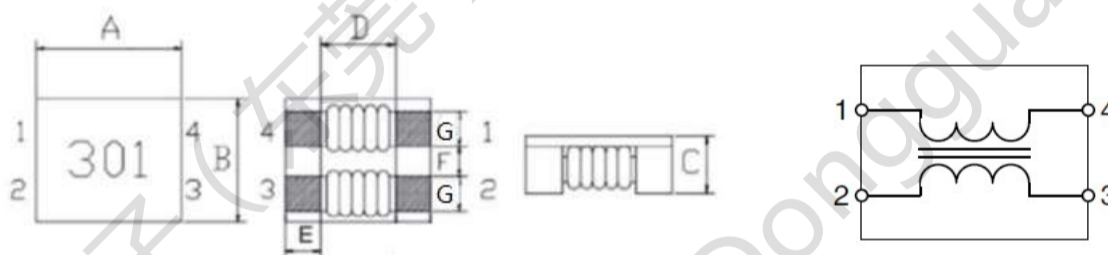

| PartNumber | A | B | C | D Typ | E(ref) | F(ref) | G(ref) |
|------------|----------|----------|---------|-------|--------|--------|--------|
| LCM7060 | 7.0±0.5 | 6.0±0.5 | 3.5±0.3 | 3.5 | 1.5 | 1.5 | 1.75 |
| LCM9070 | 9.5±0.5 | 7.0±0.5 | 5.0±0.3 | 5.5 | 1.75 | 2.0 | 1.75 |
| LCM1211 | 12.5±0.5 | 10.8±0.5 | 6.5MAX | 7.0 | 2.7 | 2.7 | 2.50 |
| LCM1513 | 15.5±0.5 | 13.0±0.5 | 6.8/MAX | 9.0 | 3.0 | 3.0 | 3.3 |

2.MEASURING CIRCUITS



- A chip-type common mode filter for large current applications. Common mode impedance surpasses 300 to 1000 Ω at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 10A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-freesoldering.
- This product does not contain regulated substances that are slated to be included in RoHS.

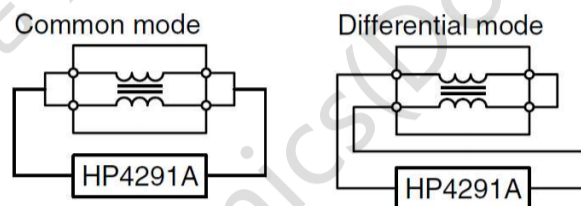

3.ELECTRICAL CHARACTERISTICS

| PART Number | Z(Ω) at 100 MHz | | RDC(m Ω) max | Rated Curren (A)Max | IR (M Ω)Min | Rated Voltage Vdc(V) |
|-------------|--------------------------|------|----------------------|---------------------|---------------------|----------------------|
| | Min | TYP | | | | |
| LCM7060-101 | 100 | 140 | 10 | 9 | 10 | 80-125 |
| LCM7060-301 | 225 | 300 | 10 | 5 | 10 | |
| LCM7060-501 | 275 | 350 | 10 | 5 | 10 | |
| LCM7060-601 | 500 | 700 | 15 | 4 | 10 | |
| LCM7060-701 | 500 | 700 | 15 | 4 | 10 | |
| LCM7060-102 | 800 | 1020 | 17 | 3 | 10 | |
| LCM7060-132 | 910 | 1300 | 21 | 2.5 | 10 | |
| LCM7060-222 | 1700 | 2000 | 60 | 1.2 | 10 | |
| LCM7060-272 | 2000 | 2700 | 65 | 1.0 | 10 | |
| LCM7060-302 | 2200 | 3500 | 80 | 0.8 | 10 | |

4. IMPEDANCE vs. FREQUENCY CHARACTERISTICS

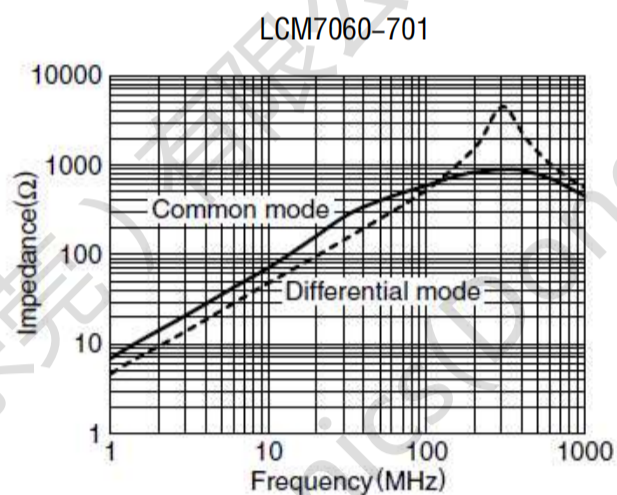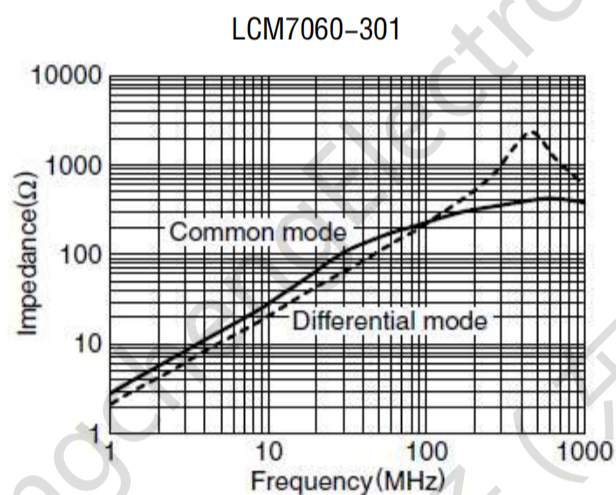


5.ELECTRICAL CHARACTERISTICS


| PART Number | Z(Ω) at 100 MHz | | RDC(m Ω) Max | Rated Current (A)Max | IR (M Ω)Min | Rated Voltage Vdc(V) |
|-------------|--------------------------|------|----------------------|----------------------|---------------------|----------------------|
| | Min | TYP | | | | |
| LCM9070-301 | 225 | 300 | 6.0 | 10.0 | 10 | 50-80 |
| LCM9070-501 | 450 | 600 | 8.0 | 8.0 | 10 | |
| LCM9070-701 | 500 | 700 | 10.0 | 6.0 | 10 | |
| LCM9070-102 | 750 | 1000 | 13.0 | 5.0 | 10 | |
| LCM9070-152 | 1000 | 1500 | 15.0 | 4.5 | 10 | |
| LCM9070-202 | 1500 | 2000 | 20.0 | 4.0 | 10 | |
| LCM9070-222 | 1700 | 2200 | 28.0 | 4.0 | 10 | |
| LCM9070-272 | 2000 | 2700 | 40.0 | 3.5 | 10 | |
| LCM9070-302 | 2400 | 3200 | 45.0 | 3.0 | 10 | |

6.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

LCM9070-701

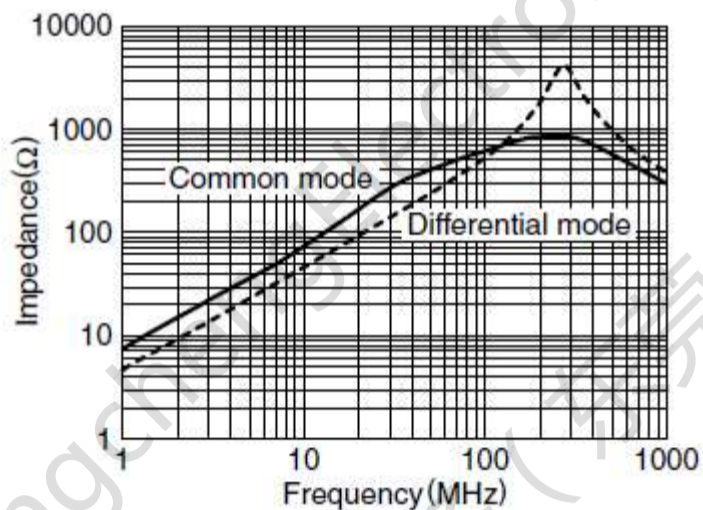

MEASURING CIRCUITS

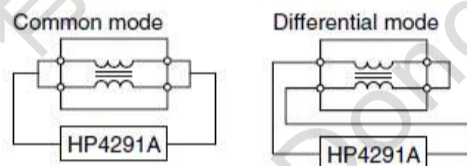


7.ELECTRICAL CHARACTERISTICS

| PART Number | Z(Ω) at 100 MHz | | RDC(m Ω) Max | Rated Current (A)Max | IR (M Ω)Min | Rated Voltage Vdc(V) |
|-------------|--------------------------|------|----------------------|----------------------|---------------------|----------------------|
| | Min | TYP | | | | |
| LCM1211-800 | 80 | 230 | 2.0 | 10.0 | 10 | 125 |
| LCM1211-701 | 500 | 700 | 6.0 | 8.0 | 10 | 125 |
| LCM1211-801 | 600 | 800 | 8.0 | 8.0 | 10 | 125 |
| LCM1211-102 | 750 | 1000 | 14.0 | 6.0 | 10 | 125 |
| LCM1211-222 | 2200 | 2500 | 35.0 | 1.8 | 10 | 125 |
| LCM1211-272 | 2300 | 2700 | 50.0 | 1.5 | 10 | 125 |

8.ELECTRICAL CHARACTERISTICS

| PART Number | Z(Ω) at 100 MHz | | RDC(m Ω) Max | Rated Current (A)Max | IR (M Ω)Min | Rated Voltage Vdc(V) |
|-------------|--------------------------|------|----------------------|----------------------|---------------------|----------------------|
| | Min | TYP | | | | |
| LCM1513-301 | 250 | 300 | 5.0 | 13 | 10 | 80 |
| LCM1513-551 | 450 | 550 | 6.0 | 10 | 10 | 80 |
| LCM1513-701 | 500 | 700 | 7.0 | 10 | 10 | 80 |
| LCM1513-102 | 800 | 1000 | 8.5 | 10 | 10 | 80 |
| LCM1513-152 | 1100 | 1500 | 9.0 | 8.0 | 10 | 80 |

9.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

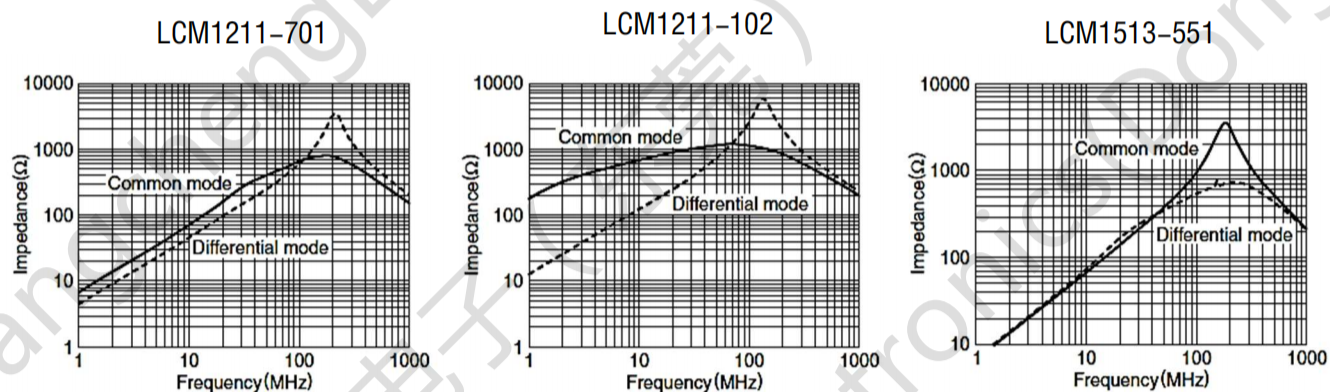

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [FANGCHENG](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)