




C28

金属化聚酯膜叠片式电容器(浸渍型)(P=5.0/7.5) Metallized polyester film capacitor(dipped type and stacked version)

■ 外形图 Outline Drawing

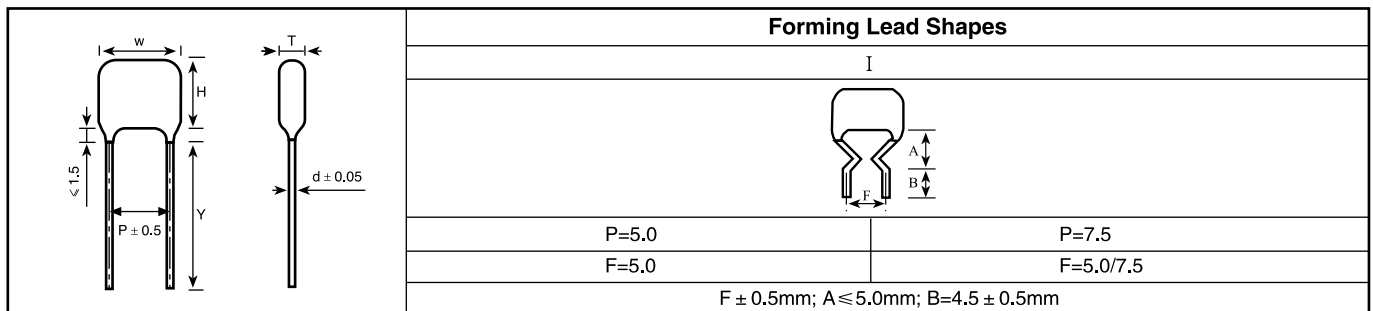

■ 特点

- 金属化聚酯膜，叠片式结构
- 阻燃性环氧粉末封装(UL94 V-0)
- 抗脉冲能力强

■ Features

- Metallized polyester film, stacked construction
- Flame retardation epoxy resin powder coated(UL94 V-0)
- High dv/dt ability

■ 主要用途

- 旁路，隔直，耦合，退耦
- 脉冲，逻辑，定时，紧凑型节能灯
- LCD监视器整流，汽车直流马达抑制干扰

■ Typical Applications

- By-passing, blocking, coupling, decoupling
- Pulse, logic, timing, compact fluorescent lamps
- Inverter for LCD monitors, automotive DC motor suppression

■ 技术要求 Specifications

引用标准 Reference Standard	GB/T 7332(IEC 60384-2)		
气候类别 Climatic Category	55/105/56		
额定温度 Rated Temperature	85°C		
工作温度范围 Operating Temperature Range	-55°C ~ 105°C (+85°C to +105°C : decreasing factor 1.25% per °C for U _R)		
额定电压 Rated Voltage	50V, 63V, 100V, 250V		
电容量范围 Capacitance Range	0.01μF ~ 3.3μF		
电容量偏差 Capacitance Tolerance	± 5%(J), ± 10%(K), ± 20%(M)		
耐电压 Voltage Proof	1.4U _R (5s)		
损耗角正切 Dissipation Factor	Frequency	C _N ≤ 0.1μF	C _N > 0.1μF
	1kHz	≤ 1.0%	≤ 1.0%
	10kHz	≤ 1.5%	≤ 1.5%
	100kHz	≤ 3.0%	—
绝缘电阻 Insulation Resistance	U _R > 100V	R ≥ 3 0000MΩ, C _N ≤ 0.33μF R _{CN} ≥ 10 000s, C _N > 0.33μF	(20°C ,100V,1min)
	U _R ≤ 100V	R ≥ 15 000MΩ, C _N ≤ 0.33μF R _{CN} ≥ 5 000s, 0.33μF < C _N ≤ 1μF R ≥ 1 000s C _N > 1μF	(20°C ,10V,1min)
最大脉冲爬升速率 Maximum Pulse Rise Time(dv/dt): 若实际工作电压 U 比额定电压 U _R 低，电容器可工作在更高的 dv/dt 场合。这样 dv/dt 允许值应为右表值乘以 U _R /U。 If the working voltage(U) is lower than the rated voltage(U _R), the capacitor can be worked at a higher dv/dt. In this case, the maximum allowed dv/dt is obtain by multiplying the right value with U _R /U.	U _R (V)	dv/dt (V/μs)	
			P=5.0
	50	250	150
	63	250	150
	100	300	---
250	100	---	

产品编码说明 Part number system

■ 18位产品代码如下：

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	2	8															

第1~3位	型号代码	Digit 1 to 3	Series code
	C28		C28
第4~5位	直流额定电压	Digit 4 to 5	DC rated voltage
	1H=50V 1J=63V 2A=100V		1H=50V 1J=63V 2A=100V
	2E=250V		2E=250V
第6~8位	标称容量	Digit 6 to 8	Rated capacitance value
	举例：103=10 × 10 ³ pF=0.01μF		For example: 103=10 × 10 ³ pF=0.01μF
第9位	容量偏差	Digit 9	Capacitance tolerance
	J= ± 5%,K= ± 10%,M= ± 20%		J= ± 5%,K= ± 10%,M= ± 20%
第10位	引线脚距P	Digit 10	Pitch
	2=5.0mm 3=7.5mm		2=5.0mm 3=7.5mm
第11位	内部特征码	Digit 11	Internal use
第12~15位	引线加工和包装代码	Digit 12 to 15	Lead form and packaging code
第16~18位	内部特征码	Digit 16 to 18	Internal use

■ Table 1 引线加工和包装代码 lead form and packaging code

第 12 位 Digit 12		第 13 位 Digit 13		第 14 位 Digit 14		第 15 位 Digit 15	
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation
A	弹带包装 ammo-pack	2 3	F=5.0mm F=7.5mm	1	表示弯脚 kinked	A	产品在连续的两个载带孔之间 each cap. between two consecutive holes P3=12.7mm,H=20.0mm (For pitch=5.0/7.5mm)
F	引线成型 lead kinked	2 3	F=5.0mm F=7.5mm	0	B=4.5mm (the length of B)	0	B 的长度偏差 ± 0.5mm B Length tolerance ± 0.5mm
Y	直脚 straight lead “Y” in the figure above	代码 Code	说明 explanation			0	引线长度偏差 ± 0.5mm Length tolerance ± 0.5mm
		45	引线长度 4.5mm lead length 4.5mm				
第 12~15 位代码为 “C000” 表示标准的引线长度 (20mm ~ 30mm) Digit12~15 code “C000” means standard lead length (20mm ~ 30mm)							



C28

■ 外形尺寸 Dimensions (mm)

50Vdc(30Vac)						
C _N (μF)	W max	H max	T max	P	d	Part number
0.010	7.3	5.5	3.2	5.0	0.5	C281H103-20****+++
0.012	7.3	5.5	3.2	5.0	0.5	C281H123-20****+++
0.015	7.3	5.5	3.2	5.0	0.5	C281H153-20****+++
0.018	7.3	5.5	3.2	5.0	0.5	C281H183-20****+++
0.022	7.3	5.5	3.2	5.0	0.5	C281H223-20****+++
0.027	7.3	5.5	3.2	5.0	0.5	C281H273-20****+++
0.033	7.3	5.5	3.2	5.0	0.5	C281H333-20****+++
0.039	7.3	5.5	3.2	5.0	0.5	C281H393-20****+++
0.047	7.3	5.5	3.2	5.0	0.5	C281H473-20****+++
0.056	7.3	5.5	3.2	5.0	0.5	C281H563-20****+++
0.068	7.3	5.5	3.2	5.0	0.5	C281H683-20****+++
0.082	7.3	5.5	3.2	5.0	0.5	C281H823-20****+++
0.10	7.3	5.5	3.2	5.0	0.5	C281H104-20****+++
0.12	7.3	5.5	3.2	5.0	0.5	C281H124-20****+++
0.15	7.3	5.5	3.5	5.0	0.5	C281H154-20****+++
0.18	7.3	5.5	4.0	5.0	0.5	C281H184-20****+++
0.22	7.3	5.5	4.3	5.0	0.5	C281H224-20****+++
0.27	7.3	7.0	4.3	5.0	0.5	C281H274-20****+++
0.33	7.3	7.0	4.8	5.0	0.5	C281H334-20****+++
0.39	7.3	7.0	5.0	5.0	0.5	C281H394-20****+++
0.47	7.3	8.5	5.5	5.0	0.5	C281H474-20****+++
0.56	7.3	8.5	5.8	5.0	0.5	C281H564-20****+++
0.68	7.3	8.5	6.5	5.0	0.5	C281H684-20****+++
0.82	7.3	9.5	6.5	5.0	0.5	C281H824-20****+++
1.0	7.3	11.0	7.5	5.0	0.5	C281H105-20****+++
1.2	10.0	9.5	5.5	7.5	0.5	C281H125-30****+++
1.5	10.0	9.5	6.5	7.5	0.5	C281H155-30****+++
1.8	10.0	11.0	6.5	7.5	0.5	C281H185-30****+++
2.2	10.0	11.0	7.0	7.5	0.5	C281H225-30****+++
2.7	10.0	13.5	7.0	7.5	0.5	C281H275-30****+++
3.3	10.0	13.5	8.0	7.5	0.5	C281H335-30****+++

63Vdc(40Vac)						
C _N (μF)	W max	H max	T max	P	d	Part number
0.010	7.3	5.5	3.2	5.0	0.5	C281J103-20****+++
0.012	7.3	5.5	3.2	5.0	0.5	C281J123-20****+++
0.015	7.3	5.5	3.2	5.0	0.5	C281J153-20****+++
0.018	7.3	5.5	3.2	5.0	0.5	C281J183-20****+++
0.022	7.3	5.5	3.2	5.0	0.5	C281J223-20****+++
0.027	7.3	5.5	3.2	5.0	0.5	C281J273-20****+++
0.033	7.3	5.5	3.2	5.0	0.5	C281J333-20****+++
0.039	7.3	5.5	3.2	5.0	0.5	C281J393-20****+++
0.047	7.3	5.5	3.2	5.0	0.5	C281J473-20****+++
0.056	7.3	5.5	3.2	5.0	0.5	C281J563-20****+++
0.068	7.3	5.5	3.2	5.0	0.5	C281J683-20****+++
0.082	7.3	5.5	3.2	5.0	0.5	C281J823-20****+++
0.10	7.3	5.5	3.2	5.0	0.5	C281J104-20****+++
0.12	7.3	5.5	3.2	5.0	0.5	C281J124-20****+++
0.15	7.3	5.5	3.5	5.0	0.5	C281J154-20****+++
0.18	7.3	5.5	4.0	5.0	0.5	C281J184-20****+++
0.22	7.3	5.5	4.3	5.0	0.5	C281J224-20****+++
0.27	7.3	7.0	4.3	5.0	0.5	C281J274-20****+++
0.33	7.3	7.0	4.8	5.0	0.5	C281J334-20****+++
0.39	7.3	7.0	5.0	5.0	0.5	C281J394-20****+++
0.47	7.3	8.5	5.5	5.0	0.5	C281J474-20****+++
0.56	7.3	8.5	5.8	5.0	0.5	C281J564-20****+++
0.68	7.3	8.5	6.5	5.0	0.5	C281J684-20****+++
0.82	7.3	9.5	6.5	5.0	0.5	C281J824-20****+++
1.0	7.3	11.0	7.5	5.0	0.5	C281J105-20****+++
1.2	10.0	9.5	5.5	7.5	0.5	C281J125-30****+++
1.5	10.0	9.5	6.5	7.5	0.5	C281J155-30****+++
1.8	10.0	11.0	6.5	7.5	0.5	C281J185-30****+++
2.2	10.0	11.0	7.0	7.5	0.5	C281J225-30****+++
2.7	10.0	13.5	7.0	7.5	0.5	C281J275-30****+++
3.3	10.0	13.5	8.0	7.5	0.5	C281J335-30****+++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%
 2. “****”表示引线加工和包装代码(见table 1)。“****”=lead form and packaging code (refer to table 1)

■ 外形尺寸 Dimensions (mm)

100Vdc(63Vac)						
C _N (μ F)	W max	H max	T max	P	d	Part number
0.010	7.3	5.5	3.2	5.0	0.5	C282A103-20****+++
0.012	7.3	5.5	3.2	5.0	0.5	C282A123-20****+++
0.015	7.3	5.5	3.2	5.0	0.5	C282A153-20****+++
0.018	7.3	5.5	3.2	5.0	0.5	C282A183-20****+++
0.022	7.3	5.5	3.2	5.0	0.5	C282A223-20****+++
0.027	7.3	5.5	3.2	5.0	0.5	C282A273-20****+++
0.033	7.3	5.5	3.2	5.0	0.5	C282A333-20****+++
0.039	7.3	5.5	3.2	5.0	0.5	C282A393-20****+++
0.047	7.3	5.5	3.2	5.0	0.5	C282A473-20****+++
0.056	7.3	5.5	3.2	5.0	0.5	C282A563-20****+++
0.068	7.3	5.5	3.2	5.0	0.5	C282A683-20****+++
0.082	7.3	5.5	3.2	5.0	0.5	C282A823-20****+++
0.10	7.3	5.5	3.2	5.0	0.5	C282A104-20****+++
0.12	7.3	5.5	3.2	5.0	0.5	C282A124-20****+++
0.15	7.3	5.5	3.5	5.0	0.5	C282A154-20****+++
0.18	7.3	5.5	4.0	5.0	0.5	C282A184-20****+++
0.22	7.3	5.5	4.3	5.0	0.5	C282A224-20****+++
0.27	7.3	7.0	4.3	5.0	0.5	C282A274-20****+++
0.33	7.3	7.0	4.8	5.0	0.5	C282A334-20****+++
0.39	7.3	7.0	5.0	5.0	0.5	C282A394-20****+++
0.47	7.3	8.5	5.5	5.0	0.5	C282A474-20****+++
0.56	7.3	8.5	5.8	5.0	0.5	C282A564-20****+++
0.68	7.3	8.5	6.5	5.0	0.5	C282A684-20****+++
0.82	7.3	9.5	6.5	5.0	0.5	C282A824-20****+++
1.0	7.3	11.0	7.5	5.0	0.5	C282A105-20****+++

250Vdc(140Vac)						
C _N (μ F)	W max	H max	T max	P	d	Part number
0.010	7.3	5.5	3.2	5.0	0.5	C282E103-20****+++
0.012	7.3	6.0	3.2	5.0	0.5	C282E123-20****+++
0.015	7.3	6.0	3.2	5.0	0.5	C282E153-20****+++
0.018	7.3	6.0	3.2	5.0	0.5	C282E183-20****+++
0.022	7.3	6.0	3.5	5.0	0.5	C282E223-20****+++
0.027	7.3	6.0	3.5	5.0	0.5	C282E273-20****+++
0.033	7.3	6.5	3.5	5.0	0.5	C282E333-20****+++
0.039	7.3	6.5	4.8	5.0	0.5	C282E393-20****+++
0.047	7.3	6.8	3.3	5.0	0.5	C282E473-20****+++
0.056	7.3	7.0	4.2	5.0	0.5	C282E563-20****+++
0.068	7.3	7.5	4.2	5.0	0.5	C282E683-20****+++
0.082	7.3	7.5	4.5	5.0	0.5	C282E823-20****+++
0.10	7.3	8.3	4.3	5.0	0.5	C282E104-20****+++
0.12	7.3	8.5	5.0	5.0	0.5	C282E124-20****+++
0.15	7.3	10.0	5.0	5.0	0.5	C282E154-20****+++
0.18	7.3	11.0	5.2	5.0	0.5	C282E184-20****+++
0.22	7.3	13.0	5.2	5.0	0.5	C282E224-20****+++

- 备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%
 2. “****”表示引线加工和包装代码(见table 1)。“****”=lead form and packaging code (refer to table 1)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [FARATRONIC](#) manufacturer:

Other Similar products are found below :

[703-6G](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [MMWAF150KME](#) [PCY2130F30153](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#)
[DPM16S56K-1F](#) [EEC2G505HQA406](#) [B32234-.033@250V-K](#) [B81133-C1104-M3](#) [MTC355L1](#) [217-0716-001](#) [PA225L30](#) [CB182K0184J--](#)
[KP1830-247/061-G](#) [274ACF4400WA0J](#) [274ACF5150WA0J](#) [SCD105K122A3-22](#) [SCD205K122A3-24](#) [PCX2339F65224](#) [PCX2339F65334](#)
[2222 368 55105](#) [2222 370 21683](#) [QXL2E473KTPT](#) [445450-1](#) [MKT182022263473](#) [WMC08P22](#) [46KN410000N1K](#) [46KR368050M1M](#) [ECQ-](#)
[W4223KZ](#) [EEC2G805HQA415](#) [PA103L30](#) [82DC4100AA60K](#) [82EC2150DQ50K](#) [VEA105K50](#) [82IC2150DQ50J](#) [82EC2220DQ50J](#)
[MTC55L4](#) [MTC56L4](#) [730P205X9400](#) [PA104L30](#) [PA224L30](#) [82DC3220AA60J](#) [82EC4100DQ70J](#) [WYP-104M](#) [82CC4220AA70J](#)
[82EC3100Z370J](#) [B32656S8105K566](#)