



# SPECIFICATION FOR APPROVAL

File No.: Q/FRK 0.GS.E.C31-C11

Product Name Metallized polypropylene film capacitor(dipped)

---

Product Type: CBB21

---

Product Code C31

---

Customer \_\_\_\_\_

---

Customer Code \_\_\_\_\_

---

Issue Date \_\_\_\_\_

---

<b>Xiamen Faratronic Co. Ltd.</b>			Approved by Customer
Drafted	Checked	Approved	



厦门法拉电子股份有限公司

**Xiamen Faratronic Co. Ltd.**

地址: 中国厦门市海沧区新园路 99 号

Add: No.99 Xinyuan Road, Haicang District, Xiamen, China

Export business

HK office : **Faratronic (HK) Co. Ltd.**

TEL: 0086-592-6208609 6208608

0852-2898 9168

FAX: 0086-592-6208557

0852-2898 9683

Mail: [Vivian@faratronic.com.cn](mailto:Vivian@faratronic.com.cn)

[hkoffice@faratronic.com.hk](mailto:hkoffice@faratronic.com.hk)

[Donny@faratronic.com.cn](mailto:Donny@faratronic.com.cn)

[kolin@faratronic.com.hk](mailto:kolin@faratronic.com.hk)

[james@faratronic.com.cn](mailto:james@faratronic.com.cn)

Http: [www.faratronic.com.cn](http://www.faratronic.com.cn)

[www.faratronic.com](http://www.faratronic.com)

\*.The specification are the property of Xiamen Faratronic Co.Ltd and shall not be copied or used as commercial purposes without permission.

**Version history**

Current version	Date	Author	Change description

## Metallized polypropylene film capacitor(dipped)

### ■ Outline Drawing

	Forming Lead Shapes			
	I	II	III	IV
	P ≥ F		P < F	
	0mm ≤ P-F ≤ 3mm	3mm < P-F ≤ 8mm	3mm < F-P ≤ 5mm	0mm < F-P ≤ 3mm
F ± 0.8mm; A ≤ 5.0mm; B = 4.5 ± 0.5mm				

### ■ Features

- Metallized polypropylene structure
- Low loss at high frequency
- Small inherent temperature rise
- Flame retardant epoxy resin powder coating (UL94/V-0)

### ■ Typical application

- Widely used in high frequency, DC, AC and pulse circuits
- Suitable for S-correction circuits of large screen monitor
- Suitable for the situation where applies high frequency and high current pulse

### ■ Specifications

Reference Standard	GB/T 10190(IEC 60384-16)				
Climatic Category	40/105/21				
Rated temperature	85°C				
Operating temperature	-40°C~105°C (+85°C to +105°C: decreasing factor 1.25% per °C for U <sub>R</sub> )				
Rated Voltage	100V, 250V, 400V, 630V, 1000V, 1250V				
Capacitance Range	0.0010 ~ 3.3μF				
Capacitance Tolerance	±5%(J), ±10%(K), ±20%(M)				
Voltage Proof	1.6U <sub>R</sub> (5s)				
Dissipation Factor	≤10 × 10 <sup>-4</sup> (20°C, 1kHz)				
Insulation Resistance	R ≥ 100 000MΩ, C <sub>N</sub> ≤ 0.33μF RC <sub>N</sub> ≥ 30 000s, C <sub>N</sub> > 0.33μF (20°C, 100V, 1min)				
Maximum Pulse Rise Time(dV/dt) If the working voltage(U) is lower than the rated voltage(U <sub>R</sub> ), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with U <sub>R</sub> /U.	Pattern II				
	U <sub>R</sub> (V)	dV/dt(V/us)			
		P=7.5	P=10.0	P=15.0	P=22.5
	100/250	660	560	310	130
	400	900	780	600	300
630	1 500	1 200	900	400	
1 000/1 250	2 500	2 200	--	--	

**■ Part number system**

The 18 digits part number is formed as follow

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	3	1															

Digit 1 to 3 Series code

C31= CBB21

Digit 4 to 5 D.C. rated voltage

2A=100V 2D=200V 2E=250V 2G=400V

2J=630V 3A=1000V 3B=1250V

Digit 6 to 8 Rated capacitance value

For example: 103=10×10<sup>3</sup>pF=0.01μF

Digit 9 Capacitance tolerance

J=±5%, K=±10%, M=±20%

Digit 10 Pitch

3=7.5mm 4=10mm 5=12.5mm 6=15mm

8=20mm 9=22.5mm A=25mm C=30mm

Digit 11 Internal use

S= PatternII


Digit 12 to 15 Lead form and packaging code

Digit 16 to 18 Internal use

**Table 1 lead form and packing code**

Digit 12		Digit 13		Digit 14		Digit 15	
code	explanation	code	explanation	code	explanation	code	explanation
A	ammo-pack	3	F=7.5mm	1	kinked	A	each cap. between two consecutive holes P3=12.7mm,H=20.0mm (For pitch=7.5mm)
		4	F=10.0mm			E	P3=25.4mm;H=20.0mm (For pitch=10.0/15.0mm)
F	lead kinked	6	F=15.0mm	0	B=4.5mm The length of B	0	B Length tolerance ±0.5mm
		7	F=17.5mm				
		8	F=20.0mm				
		9	F=22.5mm				
Y	straight lead "Y" in the figure above	code	explanation	0		0	Length tolerance ±0.5mm
		45	lead length 4.5mm				
		35	lead length 3.5mm				
		32	lead length 3.2mm				

Digit12-15 code "C000"means standard lead length (20mm ~ 30mm)



■ Dimensions(mm)

Pattern II (Reduced sizes)

100Vdc(63Vac)/250Vdc(160Vac) <sup>#</sup>							400Vdc(200Vac)						
C <sub>N</sub> (μF)	W max	H max	T max	P	d	Part number	C <sub>N</sub> (μF)	W max	H max	T max	P	d	Part number
0.010	9.8	7.7	4.0	7.5	0.6	C312A103-3S****+++	0.010	9.8	7.8	4.1	7.5	0.6	C312G103-3S****+++
0.011	9.8	7.8	4.2	7.5	0.6	C312A113-3S****+++	0.011	9.8	7.9	4.2	7.5	0.6	C312G113-3S****+++
0.012	9.8	7.9	4.3	7.5	0.6	C312A123-3S****+++	0.012	9.8	8.0	4.4	7.5	0.6	C312G123-3S****+++
0.013	9.8	8.0	4.4	7.5	0.6	C312A133-3S****+++	0.013	9.8	8.1	4.5	7.5	0.6	C312G133-3S****+++
0.015	9.8	7.8	4.2	7.5	0.6	C312A153-3S****+++	0.015	9.8	8.4	4.7	7.5	0.6	C312G153-3S****+++
0.016	9.8	7.9	4.3	7.5	0.6	C312A163-3S****+++	0.016	9.8	8.5	4.8	7.5	0.6	C312G163-3S****+++
0.018	9.8	8.1	4.4	7.5	0.6	C312A183-3S****+++	0.018	9.8	8.7	5.0	7.5	0.6	C312G183-3S****+++
0.020	9.8	8.2	4.6	7.5	0.6	C312A203-3S****+++	0.020	9.8	8.9	5.3	7.5	0.6	C312G203-3S****+++
0.022	9.8	8.4	4.8	7.5	0.6	C312A223-3S****+++	0.022	9.8	9.1	5.5	7.5	0.6	C312G223-3S****+++
0.024	9.8	8.6	4.9	7.5	0.6	C312A243-3S****+++	0.024	12.3	8.0	4.3	10.0	0.6	C312G243-4S****+++
0.027	9.8	7.6	4.0	7.5	0.6	C312A273-3S****+++	0.027	12.3	8.1	4.5	10.0	0.6	C312G273-4S****+++
0.030	9.8	7.7	4.1	7.5	0.6	C312A303-3S****+++	0.030	12.3	8.3	4.7	10.0	0.6	C312G303-4S****+++
0.033	9.8	7.9	4.2	7.5	0.6	C312A333-3S****+++	0.033	12.3	8.5	4.8	10.0	0.6	C312G333-4S****+++
0.036	9.8	8.0	4.4	7.5	0.6	C312A363-3S****+++	0.036	12.3	8.6	5.0	10.0	0.6	C312G363-4S****+++
0.039	9.8	8.1	4.5	7.5	0.6	C312A393-3S****+++	0.039	12.3	8.7	5.0	10.0	0.6	C312G393-4S****+++
0.043	9.8	8.3	4.7	7.5	0.6	C312A433-3S****+++	0.043	12.3	8.8	5.2	10.0	0.6	C312G433-4S****+++
0.047	9.8	8.5	4.8	7.5	0.6	C312A473-3S****+++	0.047	12.3	9.0	5.4	10.0	0.6	C312G473-4S****+++
0.051	12.3	8.0	4.3	10.0	0.6	C312A513-4S****+++	0.051	12.3	9.2	5.6	10.0	0.6	C312G513-4S****+++
0.056	12.3	8.1	4.5	10.0	0.6	C312A563-4S****+++	0.056	12.3	9.4	5.8	10.0	0.6	C312G563-4S****+++
0.062	12.3	8.3	4.6	10.0	0.6	C312A623-4S****+++	0.062	12.3	8.9	5.2	10.0	0.6	C312G623-4S****+++
0.068	12.3	8.5	4.8	10.0	0.6	C312A683-4S****+++	0.068	12.3	9.1	5.4	10.0	0.6	C312G683-4S****+++
0.075	12.3	8.6	5.0	10.0	0.6	C312A753-4S****+++	0.075	12.3	9.3	5.7	10.0	0.6	C312G753-4S****+++
0.082	12.3	8.8	5.2	10.0	0.6	C312A823-4S****+++	0.082	12.3	9.5	5.9	10.0	0.6	C312G823-4S****+++
0.091	12.3	8.1	4.5	10.0	0.6	C312A913-4S****+++	0.091	12.3	9.8	6.1	10.0	0.6	C312G913-4S****+++
0.10	12.3	8.3	4.7	10.0	0.6	C312A104-4S****+++	0.10	12.3	10.0	6.4	10.0	0.6	C312G104-4S****+++
0.11	12.3	8.5	4.8	10.0	0.6	C312A114-4S****+++	0.11	12.3	10.3	6.6	10.0	0.6	C312G114-4S****+++
0.12	12.3	8.6	5.0	10.0	0.6	C312A124-4S****+++	0.12	17.5	10.7	5.5	15.0	0.6	C312G124-6S****+++
0.13	12.3	8.6	4.9	10.0	0.6	C312A134-4S****+++	0.13	17.5	10.9	5.7	15.0	0.6	C312G134-6S****+++
0.15	12.3	8.9	5.2	10.0	0.6	C312A154-4S****+++	0.15	17.5	11.2	6.0	15.0	0.6	C312G154-6S****+++
0.16	12.3	9.0	5.4	10.0	0.6	C312A164-4S****+++	0.16	17.5	11.3	6.1	15.0	0.6	C312G164-6S****+++
0.18	12.3	9.3	5.6	10.0	0.6	C312A184-4S****+++	0.18	17.5	11.6	6.4	15.0	0.6	C312G184-6S****+++
0.20	12.3	9.5	5.9	10.0	0.6	C312A204-4S****+++	0.20	17.5	11.9	6.7	15.0	0.6	C312G204-6S****+++
0.22	12.3	9.8	6.1	10.0	0.6	C312A224-4S****+++	0.22	17.5	12.2	7.0	15.0	0.6	C312G224-6S****+++
0.24	12.3	10.0	6.4	10.0	0.6	C312A244-4S****+++	0.24	17.5	12.5	7.3	15.0	0.6	C312G244-6S****+++
0.27	17.5	10.5	5.3	15.0	0.6	C312A274-6S****+++	0.27	17.5	12.9	7.6	15.0	0.8	C312G274-6S****+++
0.30	17.5	10.8	5.5	15.0	0.6	C312A304-6S****+++	0.30	17.5	13.7	8.0	15.0	0.8	C312G304-6S****+++
0.33	17.5	11.0	5.8	15.0	0.6	C312A334-6S****+++	0.33	17.5	14.1	8.4	15.0	0.8	C312G334-6S****+++
0.36	17.5	11.2	6.0	15.0	0.6	C312A364-6S****+++	0.36	17.5	14.4	8.7	15.0	0.8	C312G364-6S****+++
0.39	17.5	11.4	6.2	15.0	0.6	C312A394-6S****+++	0.39	17.5	14.7	9.0	15.0	0.8	C312G394-6S****+++
0.43	17.5	11.6	6.4	15.0	0.6	C312A434-6S****+++	0.43	17.5	15.1	9.4	15.0	0.8	C312G434-6S****+++
0.47	17.5	11.9	6.6	15.0	0.6	C312A474-6S****+++	0.47	17.5	15.5	9.8	15.0	0.8	C312G474-6S****+++
0.51	17.5	12.1	6.9	15.0	0.6	C312A514-6S****+++	0.51	25.2	14.8	7.6	22.5	0.8	C312G514-9S****+++
0.56	17.5	12.4	7.2	15.0	0.6	C312A564-6S****+++	0.56	25.2	15.2	7.9	22.5	0.8	C312G564-9S****+++
0.62	17.5	12.7	7.5	15.0	0.8	C312A624-6S****+++	0.62	25.2	15.6	8.3	22.5	0.8	C312G624-9S****+++
0.68	17.5	13.5	7.8	15.0	0.8	C312A684-6S****+++	0.68	25.2	15.9	9.1	22.5	0.8	C312G684-9S****+++
0.75	17.5	13.9	8.2	15.0	0.8	C312A754-6S****+++	0.75	25.2	16.3	9.6	22.5	0.8	C312G754-9S****+++
0.82	17.5	14.2	8.5	15.0	0.8	C312A824-6S****+++	0.82	25.2	16.7	10.0	22.5	0.8	C312G824-9S****+++
0.91	17.5	14.9	8.9	15.0	0.8	C312A914-6S****+++	0.91	25.2	17.2	10.5	22.5	0.8	C312G914-9S****+++
1.0	17.5	15.0	9.3	15.0	0.8	C312A105-6S****+++	1.0	25.2	17.7	10.9	22.5	0.8	C312G105-9S****+++
1.1	17.5	15.5	9.7	15.0	0.8	C312A115-6S****+++							
1.2	25.2	14.8	7.5	22.5	0.8	C312A125-9S****+++							
1.3	25.2	15.1	7.8	22.5	0.8	C312A135-9S****+++							
1.5	25.2	15.6	8.3	22.5	0.8	C312A155-9S****+++							
1.6	25.2	15.9	8.6	22.5	0.8	C312A165-9S****+++							
1.8	25.2	16.4	9.1	22.5	0.8	C312A185-9S****+++							
2.0	25.2	16.9	10.1	22.5	0.8	C312A205-9S****+++							
2.2	25.2	18.3	9.9	22.5	0.8	C312A225-9S****+++							
2.4	25.2	18.7	10.4	22.5	0.8	C312A245-9S****+++							
2.7	25.2	19.3	10.9	22.5	0.8	C312A275-9S****+++							
3.0	25.2	19.9	11.6	22.5	0.8	C312A305-9S****+++							
3.3	25.2	20.5	12.1	22.5	0.8	C312A335-9S****+++							

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. “\*\*\*\*”=lead form and packing code (refer to table 1)

3. “#”when the rated voltage is 250Vdc,the digit 4~5 is 2E.



■ Dimensions(mm)

Pattern II (Reduced sizes)





630Vdc(220Vac) <sup>@</sup>							630Vdc(220Vac) <sup>@</sup>							1 000/1 250Vdc <sup>#</sup> (400Vac)						
C <sub>N</sub> (μF)	W max	H max	T max	P	d	Part number	C <sub>N</sub> (μF)	W max	H max	T max	P	d	Part number	C <sub>N</sub> (μF)	W max	H max	T max	P	d	Part number
0.0010	10.0	7.9	4.3	7.5	0.6	C312J102-3S****++	0.027	12.3	9.4	5.7	10.0	0.6	C312J273-4S****++	0.0010	10.0	7.9	4.3	7.5	0.6	C313A102-3S****++
0.0011	10.0	8.1	4.4	7.5	0.6	C312J112-3S****++	0.030	12.3	9.6	6.0	10.0	0.6	C312J303-4S****++	0.0011	10.0	8.1	4.4	7.5	0.6	C313A112-3S****++
0.0012	10.0	8.2	4.5	7.5	0.6	C312J122-3S****++	0.033	12.3	9.9	6.2	10.0	0.6	C312J333-4S****++	0.0012	10.0	8.2	4.5	7.5	0.6	C313A122-3S****++
0.0013	10.0	8.3	4.7	7.5	0.6	C312J132-3S****++	0.036	12.3	10.1	6.4	10.0	0.6	C312J363-4S****++	0.0013	10.0	8.3	4.7	7.5	0.6	C313A132-3S****++
0.0015	10.0	8.1	4.4	7.5	0.6	C312J152-3S****++	0.039	12.3	10.3	6.7	10.0	0.6	C312J393-4S****++	0.0015	10.0	8.1	4.4	7.5	0.6	C313A152-3S****++
0.0016	10.0	8.2	4.5	7.5	0.6	C312J162-3S****++	0.043	17.5	10.7	5.4	15.0	0.6	C312J433-6S****++	0.0016	10.0	8.2	4.5	7.5	0.6	C313A162-3S****++
0.0018	10.0	7.8	4.2	7.5	0.6	C312J182-3S****++	0.047	17.5	10.8	5.6	15.0	0.6	C312J473-6S****++	0.0018	10.0	7.8	4.2	7.5	0.6	C313A182-3S****++
0.0020	10.0	8.0	4.3	7.5	0.6	C312J202-3S****++	0.051	17.5	11.0	5.8	15.0	0.6	C312J513-6S****++	0.0020	10.0	8.0	4.3	7.5	0.6	C313A202-3S****++
0.0022	10.0	8.1	4.5	7.5	0.6	C312J222-3S****++	0.056	17.5	11.2	6.0	15.0	0.6	C312J563-6S****++	0.0022	10.0	8.1	4.5	7.5	0.6	C313A222-3S****++
0.0024	9.8	8.0	4.3	7.5	0.6	C312J242-3S****++	0.062	17.5	11.4	6.2	15.0	0.6	C312J623-6S****++	0.0024	10.0	7.7	4.0	7.5	0.6	C313A242-3S****++
0.0027	9.8	8.1	4.5	7.5	0.6	C312J272-3S****++	0.068	17.5	11.7	6.5	15.0	0.6	C312J683-6S****++	0.0027	10.0	7.8	4.2	7.5	0.6	C313A272-3S****++
0.0030	9.8	8.3	4.7	7.5	0.6	C312J302-3S****++	0.075	17.5	11.9	6.7	15.0	0.6	C312J753-6S****++	0.0030	10.0	8.0	4.4	7.5	0.6	C313A302-3S****++
0.0033	9.8	8.5	4.8	7.5	0.6	C312J332-3S****++	0.082	17.5	12.2	7.0	15.0	0.6	C312J823-6S****++	0.0033	10.0	8.2	4.5	7.5	0.6	C313A332-3S****++
0.0036	9.8	8.0	4.4	7.5	0.6	C312J362-3S****++	0.091	17.5	12.5	7.3	15.0	0.6	C312J913-6S****++	0.0036	10.0	8.3	4.7	7.5	0.6	C313A362-3S****++
0.0039	9.8	8.2	4.5	7.5	0.6	C312J392-3S****++	0.10	17.5	12.8	7.6	15.0	0.8	C312J104-6S****++	0.0039	10.0	8.4	4.8	7.5	0.6	C313A392-3S****++
0.0043	9.8	8.3	4.7	7.5	0.6	C312J432-3S****++	0.11	17.5	13.6	7.9	15.0	0.8	C312J114-6S****++	0.0043	10.0	8.2	4.5	7.5	0.6	C313A432-3S****++
0.0047	9.8	8.5	4.9	7.5	0.6	C312J472-3S****++	0.12	17.5	13.9	8.2	15.0	0.8	C312J124-6S****++	0.0047	10.0	8.3	4.7	7.5	0.6	C313A472-3S****++
0.0051	9.8	8.6	5.0	7.5	0.6	C312J512-3S****++	0.13	17.5	14.2	8.5	15.0	0.8	C312J134-6S****++	0.0051	10.0	8.5	4.8	7.5	0.6	C313A512-3S****++
0.0056	9.8	8.8	5.2	7.5	0.6	C312J562-3S****++	0.15	17.5	14.7	9.0	15.0	0.8	C312J154-6S****++	0.0056	10.0	8.7	5.0	7.5	0.6	C313A562-3S****++
0.0062	9.8	9.0	5.4	7.5	0.6	C312J622-3S****++	0.16	17.5	15.0	9.3	15.0	0.8	C312J164-6S****++	0.0062	10.0	8.7	5.0	7.5	0.6	C313A622-3S****++
0.0068	12.3	8.0	4.4	10.0	0.6	C312J682-4S****++	0.18	17.5	15.5	9.8	15.0	0.8	C312J184-6S****++	0.0068	12.0	8.9	5.2	10.0	0.6	C313A682-4S****++
0.0075	12.3	8.2	4.5	10.0	0.6	C312J752-4S****++	0.20	17.5	16.0	10.3	15.0	0.8	C312J204-6S****++	0.0075	12.0	9.1	5.4	10.0	0.6	C313A752-4S****++
0.0082	12.3	8.3	4.7	10.0	0.6	C312J822-4S****++	0.22	25.2	15.2	7.9	22.5	0.8	C312J224-9S****++	0.0082	12.0	9.3	5.6	10.0	0.6	C313A822-4S****++
0.0091	12.3	8.5	4.9	10.0	0.6	C312J912-4S****++	0.24	25.2	15.5	8.2	22.5	0.8	C312J244-9S****++	0.0091	12.0	9.5	5.9	10.0	0.6	C313A912-4S****++
0.010	12.3	7.8	4.1	10.0	0.6	C312J103-4S****++	0.27	25.2	15.9	9.2	22.5	0.8	C312J274-9S****++	0.010	12.0	9.9	6.3	10.0	0.6	C313A103-4S****++
0.011	12.3	7.9	4.2	10.0	0.6	C312J113-4S****++	0.30	25.2	16.4	9.6	22.5	0.8	C312J304-9S****++							
0.012	12.3	8.0	4.4	10.0	0.6	C312J123-4S****++	0.33	25.2	16.8	10.0	22.5	0.8	C312J334-9S****++							
0.013	12.3	8.1	4.5	10.0	0.6	C312J133-4S****++	0.36	25.2	17.2	10.4	22.5	0.8	C312J364-9S****++							
0.015	12.3	8.3	4.7	10.0	0.6	C312J153-4S****++	0.39	25.2	17.6	10.8	22.5	0.8	C312J394-9S****++							
0.016	12.3	8.5	4.8	10.0	0.6	C312J163-4S****++	0.43	25.2	18.1	11.3	22.5	0.8	C312J434-9S****++							
0.018	12.3	8.6	4.9	10.0	0.6	C312J183-4S****++	0.47	25.2	18.6	11.8	22.5	0.8	C312J474-9S****++							
0.020	12.3	8.8	5.1	10.0	0.6	C312J203-4S****++	0.51	25.2	19.0	12.2	22.5	0.8	C312J514-9S****++							
0.022	12.3	8.9	5.3	10.0	0.6	C312J223-4S****++	0.56	25.2	19.6	12.8	22.5	0.8	C312J564-9S****++							
0.024	12.3	9.1	5.5	10.0	0.6	C312J243-4S****++														

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. “\*\*\*\*”=lead form and packing code (refer to table 1)

3. “#” when the rated voltage is 1250Vdc,the digit 4~5 is 3B.

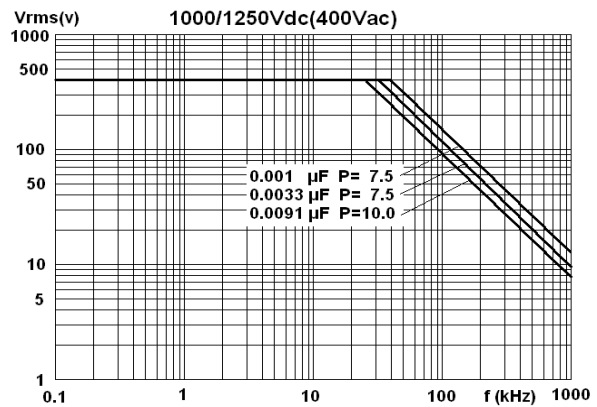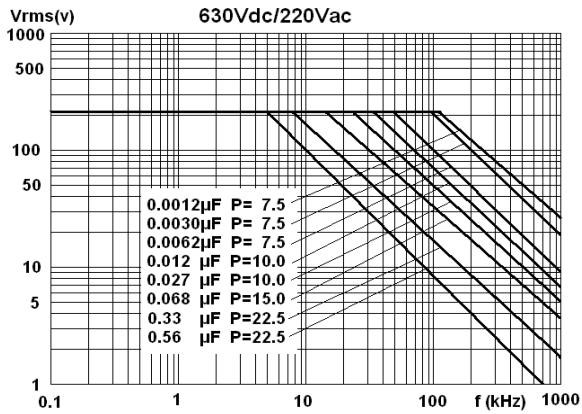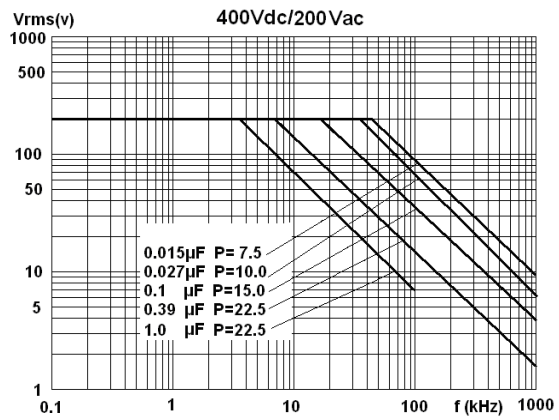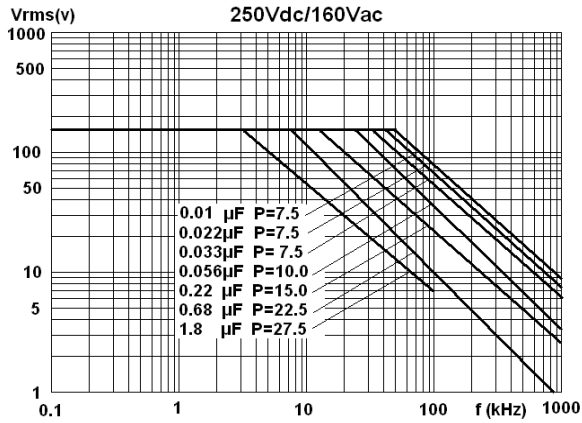4. “@”Not suitable for across-the-line applications. Pls refer to interference Suppression Capacitors.

**MAX. VOLTAGE(Vr.m.s) VERSUS FREQUENCY**


Note: sinusoidal wave-form, environment temperature  $\leq 85^{\circ}\text{C}$ , internal temperature rise  $\Delta T=10^{\circ}\text{C}$ , p (pitch) in mm.

**■ Test Method And Performance**

No.	Item	Performance	Test method(IEC 60384-16)
1	Solderability	Good quality of tinning	Solder temperature:245°C±5°C Immersion time: 2.0s±0.5s
2	Initial measurement	Capacitance Tgδ:1kHz, C>1.0μF 10kHz, C≤1.0μF	
	Terminal strength	There shall be no visible damage	Tension: 0.6≤φd≤0.8mm, 10N φd=1.0mm, 20N Bend: 0.6≤φd≤0.8mm, 5N φd=1.0mm, 10N The terminals shall be bent 2 times in each direction.
	Resistance to solder heat	There shall be no visible damage	Solder temperature:260°C±5°C Immersion time: 10s±1s
	Final measurement	ΔC/C ≤±3%(relative to the initial value) Increase of tgδ: ≤0.004 (10kHz,C≤1.0μF) ≤0.004 (1kHz,C>1.0μF)	
3	Initial measurement	Capacitance Tgδ:1kHz, C>1.0μF 10kHz, C≤1.0μF	
	Rapid change of temperature	There shall be no evidence of deterioration.	θ <sub>A</sub> =-40°C, θ <sub>B</sub> =+105°C 5 cycles, Duration: t=30min
3	Vibration	There shall be no evidence of deterioration.	Amplitude 0.75mm or acceleration 98m/s <sup>2</sup> (whichever is the smaller severity), f: 10Hz to 500Hz.Three directions, 2h for each direction, total 6h.
	Bump	There shall be no evidence of deterioration.	4 000 times, Acceleration: 390m/s <sup>2</sup> ,Pulse duration, 6ms
	Final measurement	ΔC/C≤±3%(relative to the initial value) Increase of tgδ: ≤0.004 (10kHz, C≤1.0μF) ≤0.004 (1kHz, C>1.0μF) IR: ≥ 50% of the rated value	
4	climate sequence	Initial measurement	Capacitance Tgδ:1kHz, C>1.0μF 10kHz, C≤1.0μF
		Dry heat	+105°C, 16h
		Damp heat, Cyclic	Test Db, Severity: b, the first cycle
		Cold	-40°C, 2h
		Low air pressure	There shall be no permanent breakdown, flashover or other harmful deformation when applying U <sub>R</sub> at the last 1 minute. 15°C~ 35°C, 8.5kPa, 1h,



No.	Item		Performance	Test method(IEC 60384-16)
4	climate sequence (continue)	Damp heat, cyclic other		Test Db, Severity b, the other cycles, Applying $U_R$ for 1 minute after the test finished.
		Final measurement	There shall be no evidence of deterioration and the marking shall be legible. $\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of $\text{tg}\delta$ : $\leq 0.005$ (10kHz, $C \leq 1.0\mu\text{F}$ ) $\leq 0.005$ (1kHz, $C > 1.0\mu\text{F}$ ) IR: $\geq 50\%$ of the rated value	
5	Damp heat steady state		There shall be no evidence of deterioration and the marking shall be legible. $\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of $\text{tg}\delta \leq 0.002$ IR: $\geq 50\%$ of the rated value	Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$ Humidity: $93 \pm 3\%$ RH Duration: 21 days
6	Endurance		$\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of $\text{tg}\delta$ : $\leq 0.004$ (10kHz, $C \leq 1.0\mu\text{F}$ ) $\leq 0.004$ (1kHz, $C > 1.0\mu\text{F}$ ) IR: $\geq 50\%$ of the rated value	Temperature: $+85^\circ\text{C}$ Voltage: $1.25 \times U_R$ (50Hz) Duration: 1 000h
7	Temperature characteristic		Measuring capacitance at test point b, d, f: Characteristic at lower category temperature $-40^\circ\text{C}$ : $0 \leq (C_b - C_d)/C_d \leq +3\%$ Characteristic at upper category temperature $+85^\circ\text{C}$ : $-3.25\% \leq (C_f - C_d)/C_d \leq 0$	Static method: The capacitors should be kept at the following temperature in turn: a. $(+20 \pm 2)^\circ\text{C}$ b. $(-40 \pm 2)^\circ\text{C}$ d. $(20 \pm 2)^\circ\text{C}$ f. $(+85 \pm 2)^\circ\text{C}$ g. $(+20 \pm 2)^\circ\text{C}$
8	Charging and discharging		$\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of $\text{tg}\delta$ : $\leq 0.005$ (10kHz, $C \leq 1.0\mu\text{F}$ ) $\leq 0.005$ (1kHz, $C > 1.0\mu\text{F}$ ) IR: $\geq 50\%$ of the rated value	Times: 10 000 Duration of charging: 0.5s Duration of discharging: 0.5s Charging voltage: rated voltage Charging resistance: $220/C_R (\Omega)$ Discharging resistance: $R = 10/C_R (\Omega)$ or $20\Omega$ (whichever is the greater) $C_R$ : rated capacitance ( $\mu\text{F}$ )

**Quality ensuring test (before shipment):**

Inspection item (each batch)	Inspection level (GB 2828)	
	IL	AQL
Appearance inspection	S-4	1.5%
Dimensions		
Capacitance	II	0.65%
Tangent of the loss angle		
Dielectric strength		
Insulation resistance		
Solderability	S-3	2.5%




**■ Marking**
 $P \leq 10.0\text{mm}$ 
 $P > 10.0\text{mm}$ 

**■ Taping for dipped-type capacitor**
**▲ Outline Drawing**

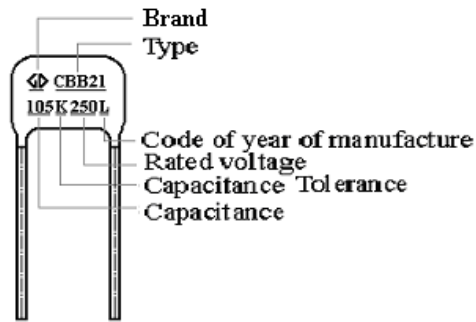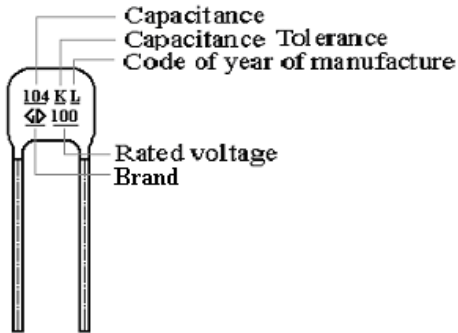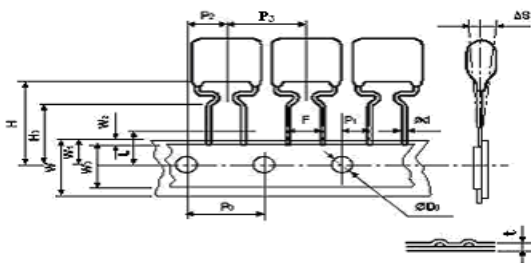
Fig.1

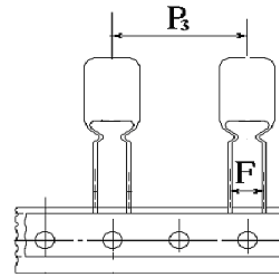


Fig 2

**▲ Taping Dimensions(mm)**

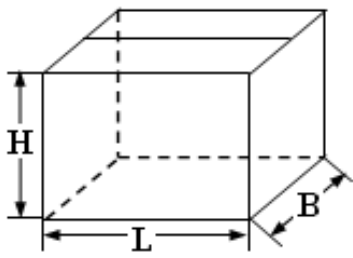
Technology index title	Code	Dimensions (mm)				Tolerance
		P=5.0	P=7.5	P=10.0	P=15.0	
Taping type	—	Fig 1	Fig 1	Fig 2	Fig 2	—
Part number Digit 12-15	Ammo-pack	A21A	A31A	A41E	A61E	
Taping pitch	P <sub>3</sub>	12.7	12.7	25.4	25.4	±1.0
Feed hole pitch	P <sub>0</sub>	12.7	12.7	12.7	12.7	±0.3
Center of wire	P <sub>1</sub>	3.85	2.60	7.7	5.2	±0.7
Center of body	P <sub>2</sub>	6.35	6.35	12.7	12.7	±1.3
Pitch of taping wire	F**	5.0	7.5	10.0	15.0	+0.8 -0.2
Component alignment	ΔS	0	0	0	0	±2.0
Height of crangle from tape center	H	20.0	20.0	20.0	20.0	±1.0
Height of component from tape center	H <sub>0</sub>	16.0	16.0	16.0	16.0	±0.5
Carrier tape width	W	18.0	18.0	18.0	18.0	+1.0 -0.5
Hold down tape width	W <sub>0</sub>	10min	10min	10min	10min	—
Hole position	W <sub>1</sub>	9.0	9.0	9.0	9.0	+0.75 -0.5
Hold down tape position	W <sub>2</sub>	3max	3max	3max	3max	—
Feed hole dia.	D <sub>0</sub>	4.0	4.0	4.0	4.0	±0.3
Tape thickness	t	0.7	0.7	0.7	0.7	±0.2

**Note:** \* P<sub>0</sub>=15mm is also available;

\*\* F can be other lead spacing;


■ Packing box sizes(mm)

1. Out packing box for bulk




L:375±5  
B:375±5  
H:265±5

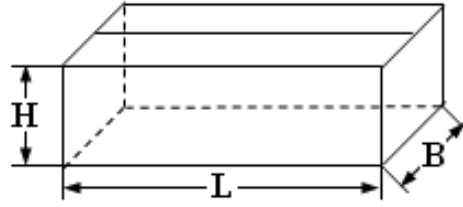2. Inner packing box for bulk



L:355±3  
B:175±3  
H:118±3

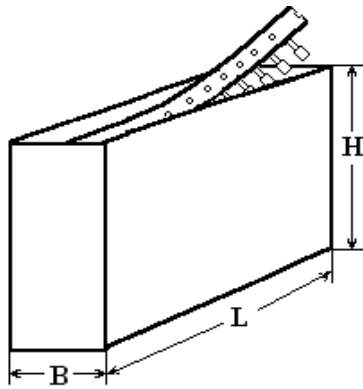3. Box sizes for Ammo-pack



L:330±3  
B:48±3  
H:260±3

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [faratronic](#) manufacturer:*

Other Similar products are found below :

[C42Q2225K9SC000](#) [C312J105JB2C000](#) [C42P2474K9SCB5A](#) [C163L474J0A2000](#) [C43Q1224K9SC000](#) [C823D822J60Q350](#)

[C212A475K9AC000](#) [C323A683K60C000](#) [C43Q1472M40C000](#) [C242A105J2SC000](#) [C222S105J60C000](#) [C4BQ2475MBWC500](#)

[C42Q2225MBSC000](#) [C43Q1103K40C000](#) [C352J333J40C000](#) [C241J105J2SA201](#) [D43Q1224KB0C000](#) [C222S105J60Y350](#)

[C823A104J90C000](#) [C823A563J90C000](#) [C42Q2474K6FC450](#) [C4BQ2225MBWC000](#) [C42Q2334K6SC000](#) [C43Q1103K6SC000](#)

[C242A104J2SA201](#) [C323A104J90C000](#) [C823D471J60C350](#) [C42Q2475MBFC500](#) [C312E474J6SC000](#) [C322J104J60Q350](#)

[C42Q2105M9SC000](#) [C3D1U506KFAA382](#) [C322E225K90C000](#) [C6AQ1475JB20000](#) [C242A474J2SA201](#) [C42Q2473M4SC000](#)

[C823A223J60C000](#) [C352J473J40C000](#) [C42P2475KB0C000](#) [C42Q2474K6FC000](#) [C42Q2224K6SC000](#) [C222S154J40A40E](#)

[C222T105K90C000](#) [C252A475J60C322](#) [C42Q2335KBAC350](#) [C42P2225K9SC000](#) [C322E224K40C000](#) [C823C103J60C350](#)

[C242A224J2SA201](#) [C42P2474K6SC400](#)