


金属化聚丙烯膜电容器 Metallized polypropylene film capacitor(Box-type)

外形图 Outline Drawing

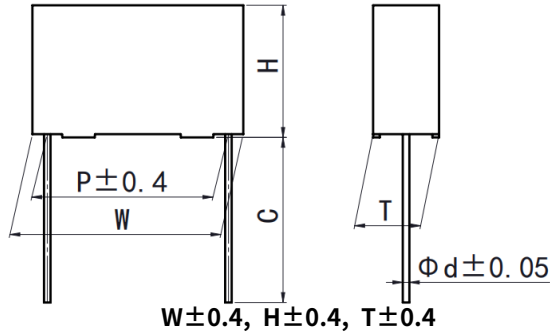

特点

- 金属化聚丙烯膜
- 高频损耗小
- 内部温升小
- 塑料外壳(UL94 V-0), 阻燃环氧填充

主要用途

- 广泛应用于高频、直流、交流和脉冲电路中
- 电视机、显示器 S 校正电路

Features


- Metallized polypropylene film
- Low loss at high frequency
- Small inherent temperature rise
- Plastic case(UL94 V-0), epoxy resin sealing

Typical Applications

- Widely used in high frequency, DC, AC and pulse circuits
- S-correction circuits for TV sets and monitors

技术要求 Specifications

| | | | | | | | |
|---|---|-------------|-------|--------|--------|--------|--------|
| 引用标准 Reference Standard | GB/T 10190 (IEC 60384-16) | | | | | | |
| 气候类别 Climatic Category | 55/105/56 | | | | | | |
| 额定温度 Rated Temperature | 85°C | | | | | | |
| 工作温度 Operating Temperature Range | -55°C~105°C (+85°C to +105°C: decreasing factor 1.25% per °C for U _R) | | | | | | |
| 额定电压 Rated Voltage | 160Vdc(90Vac), 250Vdc(160Vac), 400Vdc(220Vac), 630Vdc(250Vac) 1 000Vdc(400Vac), 1 600Vdc(600Vac), 2 000Vdc(700Vac) | | | | | | |
| 电容量范围 Capacitance Range | 0.00056μF~15.0μF | | | | | | |
| 电容量偏差 Capacitance Tolerance | ±2%(G), ±3%(H), ±5%(J), ±10%(K), ±20%(M) | | | | | | |
| 耐电压 Voltage Proof | 1.6U _R (5s) | | | | | | |
| 损耗角正切 Dissipation Factor | ≤10×10 ⁻⁴ (20°C, 1kHz) | | | | | | |
| 绝缘电阻 Insulation Resistance | R≥100 000MΩ, C _N ≤0.33μF RC _N ≥30 000s, C _N >0.33μF (20°C, 100V, 1min) | | | | | | |
| 最大脉冲爬升速率 Maximum Pulse Rise Time(dV/dt):若实际工作电压 U 比额定电压 U _R 低, 电容器可工作在更高的 dV/dt 场合, 这样 dV/dt 允许值应为右表值乘以 U _R /U。 If the working voltage(U) is lower than the rated voltage(U _R),the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with U _R /U. | U _R (V) | dV/dt(V/μs) | | | | | |
| | | P=5.0 | P=7.5 | P=10.0 | P=15.0 | P=22.5 | P=27.5 |
| | 160 | 110 | 310 | 190 | 110 | 65 | 55 |
| | 250 | 270 | 660 | 560 | 310 | 130 | 110 |
| | 400 | 440 | 900 | 780 | 600 | 300 | 130 |
| | 630 | 550 | 1500 | 1200 | 900 | 400 | 200 |
| | 1 000 | - | - | 2200 | 2 000 | 800 | - |
| | 1 600 | - | - | - | 4 500 | 1 800 | - |
| 2 000 | - | - | - | 9 500 | 4 500 | - | |



C32
MKP21 series

■ **产品编码说明 Part number system**

■ 15 位产品代码如下:


The 15 digits part number is formed as follow:

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| C | 3 | 2 | | | | | | | | | | | | |

| | | | |
|-----------|--|----------------|--|
| 第 1~3 位 | 型号代码 | Digit 1 to 3 | Series code |
| | C32= MKP21 | | C32= MKP21 |
| 第 4~5 位 | 直流额定电压 | Digit 4 to 5 | D.C. rated voltage |
| | 2C=160V 2E=250V 2G=400V 2J=630V 3A=1000V 3C=1600V 3D=2 000V | | 2C=160V 2E=250V 2G=400V 2J=630V 3A=1000V 3C=1600V 3D=2 000V |
| 第 6~8 位 | 标称容量 | Digit 6 to 8 | Rated capacitance value |
| | 举例: 103=10×10 ³ pF=0.01μF | | for example: 103=10×10 ³ pF=0.01μF |
| 第 9 位 | 容量偏差 | Digit 9 | Capacitance tolerance |
| | G=±2%, H=±3%, J=±5% K=±10%, M=±20% | | G=±2%, H=±3%, J=±5% K=±10%, M=±20% |
| 第 10 位 | 引线脚距 P | Digit 10 | Pitch |
| | 2=5.0mm 3=7.5mm 4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm | | 2=5.0mm 3=7.5mm 4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm |
| 第 11 位 | 内部特征码 | Digit 11 | Internal use |
| 第 12~15 位 | 引线加工和包装代码 | Digit 12 to 15 | Lead form and packaging code |

■ **Table 1 引线加工和包装代码 lead form and packaging code**

| 第 12 位 Digit 12 | | 第 13 位 Digit 13 | | 第 14 位 Digit 14 | | 第 15 位 Digit 15 | |
|-----------------|---|-----------------|--|-----------------|------------------|-----------------|---|
| 代码 Code | 说明 explanation | 代码 Code | 说明 explanation | 代码 Code | 说明 explanation | 代码 Code | 说明 explanation |
| A | 弹带包装 ammo-pack | 2 | F=5.0mm | 0 | 表示直脚 straight | 1 | 产品在连续的两个载带孔之间 each cap.among two consecutive holes P3=12.7mm, H=18.5mm(For pitch=5.0/7.5mm) |
| | | 3 | F=7.5mm | | | | 5 |
| | | 4 | F=10.0mm | | | | |
| | | 6 | F=15.0mm | | | | |
| C | 直脚 straight lead “C” in the figure above | 代码 Code | 说明 explanation | 0 | | | 引线长度偏差±0.5mm 或标准长度 Length tolerance±0.5mm Or standard length |
| | | 00 | 标准的引线长度(18mm ~26 mm) standard lead length | | | | |
| | | 45 | 引线长度 4.5mm lead length 4.5mm | | | | |




■ 外形尺寸 Dimensions(mm)

| 160V(90Vac) | | | | | | |
|------------------------|------|------|-----|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.027 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322C273-20**** |
| 0.033 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322C333-20**** |
| 0.039 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322C393-20**** |
| 0.047 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322C473-20**** |
| 0.056 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322C563-20**** |
| 0.068 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322C683-20**** |
| 0.082 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322C823-20**** |
| 0.10 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322C104-20**** |
| 0.12 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322C124-20**** |
| 0.15 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322C154-20**** |
| 0.068 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322C683-30**** |
| 0.082 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322C823-30**** |
| 0.10 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322C104-30**** |
| 0.12 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322C124-30**** |
| 0.15 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322C154-30**** |
| 0.18 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322C184-30**** |
| 0.082 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322C823-40**** |
| 0.10 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322C104-40**** |
| 0.12 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322C124-40**** |
| 0.15 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322C154-40**** |
| 0.18 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322C184-40**** |
| 0.22 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322C224-40**** |
| 0.27 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322C274-40**** |
| 0.18 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322C184-60**** |
| 0.22 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322C224-60**** |
| 0.27 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322C274-60**** |
| 0.33 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322C334-60**** |
| 0.39 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322C394-60**** |
| 0.47 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322C474-60**** |
| 0.56 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322C564-60**** |
| 0.68 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322C684-60**** |

| 160V(90Vac) | | | | | | |
|------------------------|------|------|------|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.82 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C322C824-60**** |
| 1.0 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322C105-60**** |
| 1.2 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322C125-60**** |
| 1.5 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322C155-60**** |
| 1.8 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322C185-60**** |
| 0.47 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322C474-90**** |
| 0.56 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322C564-90**** |
| 0.68 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322C684-90**** |
| 0.82 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322C824-90**** |
| 1.0 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322C105-90**** |
| 1.2 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322C125-90**** |
| 1.5 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322C155-90**** |
| 1.8 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C322C185-90**** |
| 2.2 | 26.5 | 20.0 | 11.0 | 22.5 | 0.8 | C322C225-90**** |
| 2.7 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322C275-90**** |
| 3.3 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322C335-90**** |
| 1.0 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322C105-B0**** |
| 1.2 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322C125-B0**** |
| 1.5 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322C155-B0**** |
| 1.8 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322C185-B0**** |
| 2.2 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322C225-B0**** |
| 2.7 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322C275-B0**** |
| 3.3 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322C335-B0**** |
| 3.9 | 32.0 | 22.0 | 13.0 | 27.5 | 0.8 | C322C395-B0**** |
| 4.7 | 32.0 | 28.0 | 14.0 | 27.5 | 0.8 | C322C475-B0**** |
| 5.6 | 32.0 | 24.5 | 15.0 | 27.5 | 0.8 | C322C565-B0**** |
| 6.8 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322C685-B0**** |
| 8.2 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322C825-B0**** |
| 10.0 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322C106-B0**** |
| 12.0 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322C126-B0**** |
| 15.0 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322C156-B0**** |

备注 Note: 1. “-”表示容量偏差。 “-”=capacitance tolerance code. M=±20%, K=±10%, J=±5%, H=±3%, G=±2%.
2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code (refer to table 1).



C32


MKP21 series

■ 外形尺寸 Dimensions(mm)

| 250V(160Vac) | | | | | | |
|------------------------|------|------|-----|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.012 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E123-20**** |
| 0.015 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E153-20**** |
| 0.018 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E183-20**** |
| 0.022 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E223-20**** |
| 0.027 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E273-20**** |
| 0.033 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E333-20**** |
| 0.039 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322E393-20**** |
| 0.047 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322E473-20**** |
| 0.056 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322E563-20**** |
| 0.068 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322E683-20**** |
| 0.082 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322E823-20**** |
| 0.10 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322E104-20**** |
| 0.12 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322E124-20**** |
| 0.027 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E273-30**** |
| 0.033 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E333-30**** |
| 0.039 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E393-30**** |
| 0.047 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E473-30**** |
| 0.056 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E563-30**** |
| 0.068 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322E683-30**** |
| 0.082 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322E823-30**** |
| 0.10 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322E104-30**** |
| 0.12 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322E124-30**** |
| 0.15 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322E154-30**** |
| 0.18 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322E184-30**** |
| 0.033 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E333-40**** |
| 0.039 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E393-40**** |
| 0.047 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E473-40**** |
| 0.056 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E563-40**** |
| 0.068 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E683-40**** |
| 0.082 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322E823-40**** |
| 0.10 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322E104-40**** |
| 0.12 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322E124-40**** |
| 0.15 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322E154-40**** |
| 0.18 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322E184-40**** |
| 0.22 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322E224-40**** |
| 0.10 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322E104-60**** |
| 0.12 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322E124-60**** |
| 0.15 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322E154-60**** |

| 250V(160Vac) | | | | | | |
|------------------------|------|------|------|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.18 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322E184-60**** |
| 0.22 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322E224-60**** |
| 0.27 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322E274-60**** |
| 0.33 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322E334-60**** |
| 0.39 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322E394-60**** |
| 0.47 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322E474-60**** |
| 0.56 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322E564-60**** |
| 0.68 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C322E684-60**** |
| 0.82 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322E824-60**** |
| 1.0 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322E105-60**** |
| 1.2 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322E125-60**** |
| 0.39 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322E394-90**** |
| 0.47 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322E474-90**** |
| 0.56 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322E564-90**** |
| 0.68 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322E684-90**** |
| 0.82 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322E824-90**** |
| 1.0 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322E105-90**** |
| 1.2 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322E125-90**** |
| 1.5 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322E155-90**** |
| 1.8 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C322E185-90**** |
| 2.2 | 26.5 | 20.0 | 11.0 | 22.5 | 0.8 | C322E225-90**** |
| 2.7 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322E275-90**** |
| 0.82 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E824-B0**** |
| 1.0 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E105-B0**** |
| 1.2 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E125-B0**** |
| 1.5 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E155-B0**** |
| 1.8 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E185-B0**** |
| 2.2 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322E225-B0**** |
| 2.7 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322E275-B0**** |
| 3.3 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322E335-B0**** |
| 3.9 | 32.0 | 22.0 | 13.0 | 27.5 | 0.8 | C322E395-B0**** |
| 4.7 | 32.0 | 28.0 | 14.0 | 27.5 | 0.8 | C322E475-B0**** |
| 5.6 | 32.0 | 24.5 | 15.0 | 27.5 | 0.8 | C322E565-B0**** |
| 6.8 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322E685-B0**** |
| 8.2 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322E825-B0**** |
| 10.0 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322E106-B0**** |
| 12.0 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322E126-B0**** |
| 15.0 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322E156-B0**** |

备注 Note: 1. “-”表示容量偏差。 “-”=capacitance tolerance code. M=±20%, K=±10%, J=±5%, H=±3%, G=±2%。
 2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code (refer to table 1).




■ 外形尺寸 Dimensions(mm)

| 400V(220Vac) [@] | | | | | | |
|---------------------------|------|------|-----|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.0039 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G392-20**** |
| 0.0047 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G472-20**** |
| 0.0056 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G562-20**** |
| 0.0068 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G682-20**** |
| 0.0082 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G822-20**** |
| 0.010 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G103-20**** |
| 0.012 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322G123-20**** |
| 0.015 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322G153-20**** |
| 0.018 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322G183-20**** |
| 0.022 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322G223-20**** |
| 0.027 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322G273-20**** |
| 0.033 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322G333-20**** |
| 0.039 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322G393-20**** |
| 0.047 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322G473-20**** |
| 0.010 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G103-30**** |
| 0.012 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G123-30**** |
| 0.015 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G153-30**** |
| 0.018 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G183-30**** |
| 0.022 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G223-30**** |
| 0.027 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322G273-30**** |
| 0.033 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322G333-30**** |
| 0.039 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322G393-30**** |
| 0.047 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322G473-30**** |
| 0.056 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322G563-30**** |
| 0.068 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322G683-30**** |
| 0.015 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G153-40**** |
| 0.018 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G183-40**** |
| 0.022 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G223-40**** |
| 0.027 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G273-40**** |
| 0.033 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G333-40**** |
| 0.039 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322G393-40**** |
| 0.047 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322G473-40**** |
| 0.056 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322G563-40**** |
| 0.068 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322G683-40**** |
| 0.082 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322G823-40**** |
| 0.10 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322G104-40**** |
| 0.068 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322G683-60**** |

| 400V(220Vac) [@] | | | | | | |
|---------------------------|------|------|------|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number |
| 0.082 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322G823-60**** |
| 0.10 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322G104-60**** |
| 0.12 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322G124-60**** |
| 0.15 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322G154-60**** |
| 0.18 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322G184-60**** |
| 0.22 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322G224-60**** |
| 0.27 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322G274-60**** |
| 0.33 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C322G334-60**** |
| 0.39 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322G394-60**** |
| 0.47 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322G474-60**** |
| 0.56 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322G564-60**** |
| 0.68 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322G684-60**** |
| 0.18 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322G184-90**** |
| 0.22 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322G224-90**** |
| 0.27 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322G274-90**** |
| 0.33 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322G334-90**** |
| 0.39 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322G394-90**** |
| 0.47 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322G474-90**** |
| 0.56 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322G564-90**** |
| 0.68 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322G684-90**** |
| 0.82 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C322G824-90**** |
| 1.0 | 26.5 | 20.0 | 11.0 | 22.5 | 0.8 | C322G105-90**** |
| 1.2 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322G125-90**** |
| 1.5 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322G155-90**** |
| 0.56 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322G564-B0**** |
| 0.68 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322G684-B0**** |
| 0.82 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322G824-B0**** |
| 1.0 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322G105-B0**** |
| 1.2 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322G125-B0**** |
| 1.5 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322G155-B0**** |
| 1.8 | 32.0 | 22.0 | 13.0 | 27.5 | 0.8 | C322G185-B0**** |
| 2.2 | 32.0 | 24.5 | 15.0 | 27.5 | 0.8 | C322G225-B0**** |
| 2.7 | 32.0 | 28.0 | 14.0 | 27.5 | 0.8 | C322G275-B0**** |
| 3.3 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322G335-B0**** |
| 3.9 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322G395-B0**** |
| 4.7 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322G475-B0**** |
| 5.6 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322G565-B0**** |


备注 Note: 1. “-”表示容量偏差。 “-”=capacitance tolerance code. M=±20%, K=±10%, J=±5%, H=±3%, G=±2%。
 2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code (refer to table 1).
 3. “@”不用作跨线,请参见抗干扰电容器(Page 109)。
 “@” Not suitable for across-the-line application. Pls refer to Interference Suppression Capacitors(Page 109).



■ 外形尺寸 Dimensions(mm)

| 630V(250Vac) [®] | | | | | | | 630V(250Vac) [®] | | | | | | | 630V(250Vac) [®] | | | | | | |
|---------------------------|------|------|-----|-----|-----|-----------------|---------------------------|------|------|-----|------|-----|-----------------|---------------------------|------|------|------|------|-----|-----------------|
| C _N (μF) | W | H | T | P | d | Part number | C _N (μF) | W | H | T | P | d | Part number | C _N (μF) | W | H | T | P | d | Part number |
| 0.0010 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J102-20**** | 0.027 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322J273-30**** | 0.12 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322J124-60**** |
| 0.0012 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J122-20**** | 0.033 | 10.5 | 12.0 | 6.0 | 7.5 | 0.6 | C322J333-30**** | 0.15 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322J154-60**** |
| 0.0015 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J152-20**** | 0.0010 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J102-40**** | 0.18 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C322J184-60**** |
| 0.0018 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J182-20**** | 0.0012 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J122-40**** | 0.22 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C322J224-60**** |
| 0.0022 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J222-20**** | 0.0015 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J152-40**** | 0.27 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322J274-60**** |
| 0.0027 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J272-20**** | 0.0018 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J182-40**** | 0.33 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C322J334-60**** |
| 0.0033 | 7.2 | 7.5 | 3.5 | 5.0 | 0.5 | C322J332-20**** | 0.0022 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J222-40**** | 0.082 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322J823-90**** |
| 0.0039 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322J392-20**** | 0.0027 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J272-40**** | 0.10 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322J104-90**** |
| 0.0047 | 7.2 | 9.5 | 4.5 | 5.0 | 0.6 | C322J472-20**** | 0.0033 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J332-40**** | 0.12 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322J124-90**** |
| 0.0056 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322J562-20**** | 0.0039 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J392-40**** | 0.15 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322J154-90**** |
| 0.0068 | 7.2 | 10.0 | 5.0 | 5.0 | 0.6 | C322J682-20**** | 0.0047 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J472-40**** | 0.18 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C322J184-90**** |
| 0.0082 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322J822-20**** | 0.0056 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J562-40**** | 0.22 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C322J224-90**** |
| 0.010 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322J103-20**** | 0.0068 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J682-40**** | 0.27 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322J274-90**** |
| 0.012 | 7.2 | 11.0 | 6.0 | 5.0 | 0.6 | C322J123-20**** | 0.0082 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J822-40**** | 0.33 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C322J334-90**** |
| 0.0010 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J102-30**** | 0.010 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J103-40**** | 0.39 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C322J394-90**** |
| 0.0012 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J122-30**** | 0.012 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J123-40**** | 0.47 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C322J474-90**** |
| 0.0015 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J152-30**** | 0.015 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J153-40**** | 0.56 | 26.5 | 20.0 | 11.0 | 22.5 | 0.8 | C322J564-90**** |
| 0.0018 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J182-30**** | 0.018 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C322J183-40**** | 0.68 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C322J684-90**** |
| 0.0022 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J222-30**** | 0.022 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322J223-40**** | 0.33 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322J334-B0**** |
| 0.0027 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J272-30**** | 0.027 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322J273-40**** | 0.39 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322J394-B0**** |
| 0.0033 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J332-30**** | 0.033 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C322J333-40**** | 0.47 | 32.0 | 18.0 | 9.0 | 27.5 | 0.8 | C322J474-B0**** |
| 0.0039 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J392-30**** | 0.039 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322J393-40**** | 0.56 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322J564-B0**** |
| 0.0047 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J472-30**** | 0.047 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C322J473-40**** | 0.68 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322J684-B0**** |
| 0.0056 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J562-30**** | 0.027 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322J273-60**** | 0.82 | 32.0 | 20.0 | 11.0 | 27.5 | 0.8 | C322J824-B0**** |
| 0.0068 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J682-30**** | 0.033 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322J333-60**** | 1.0 | 32.0 | 22.0 | 13.0 | 27.5 | 0.8 | C322J105-B0**** |
| 0.0082 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J822-30**** | 0.039 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322J393-60**** | 1.2 | 32.0 | 24.5 | 15.0 | 27.5 | 0.8 | C322J125-B0**** |
| 0.010 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J103-30**** | 0.047 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322J473-60**** | 1.5 | 32.0 | 28.0 | 14.0 | 27.5 | 0.8 | C322J155-B0**** |
| 0.012 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | C322J123-30**** | 0.056 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C322J563-60**** | 1.8 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322J185-B0**** |
| 0.015 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322J153-30**** | 0.068 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322J683-60**** | 2.2 | 32.0 | 33.0 | 18.0 | 27.5 | 0.8 | C322J225-B0**** |
| 0.018 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322J183-30**** | 0.082 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C322J823-60**** | 2.7 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322J275-B0**** |
| 0.022 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | C322J223-30**** | 0.10 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C322J104-60**** | 3.3 | 32.0 | 37.0 | 22.0 | 27.5 | 0.8 | C322J335-B0**** |

- 备注 Note: 1. “-”表示容量偏差。 “ ”=capacitance tolerance code. M=±20%, K=±10%, J=±5%, H=±3%, G=±2%。
 2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code (refer to table 1).
 3. “@”不用作跨线,请参见抗干扰电容器(Page 109)。
 “@” Not suitable for across-the-line application. Pls refer to Interference Suppression Capacitors(Page 109).



■ 外形尺寸 Dimensions(mm)

| 1 000V(400Vac) | | | | | | | 1 600V(600Vac) | | | | | | | 2 000V(700Vac) | | | | | | | |
|------------------------|------|------|------|------|-----|-----------------|------------------------|------|------|------|------|-----|-----------------|------------------------|------|------|------|------|-----|-----------------|--|
| C _N (μF) | W | H | T | P | d | Part number | C _N (μF) | W | H | T | P | d | Part number | C _N (μF) | W | H | T | P | d | Part number | |
| 0.0010 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A102-40**** | 0.00056 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C561-60**** | 0.00056 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D561-60**** | |
| 0.0012 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A122-40**** | 0.00062 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C621-60**** | 0.00062 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D621-60**** | |
| 0.0015 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A152-40**** | 0.00068 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C681-60**** | 0.00068 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D681-60**** | |
| 0.0018 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A182-40**** | 0.00082 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C821-60**** | 0.00082 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D821-60**** | |
| 0.0022 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A222-40**** | 0.0010 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C102-60**** | 0.0010 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D102-60**** | |
| 0.0027 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A272-40**** | 0.0012 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C122-60**** | 0.0012 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D122-60**** | |
| 0.0033 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A332-40**** | 0.0015 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C152-60**** | 0.0015 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D152-60**** | |
| 0.0039 | 13.0 | 9.0 | 4.0 | 10.0 | 0.6 | C323A392-40**** | 0.0018 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C182-60**** | 0.0018 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D182-60**** | |
| 0.0047 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C323A472-40**** | 0.0022 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C222-60**** | 0.0022 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D222-60**** | |
| 0.0056 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C323A562-40**** | 0.0027 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C272-60**** | 0.0027 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D272-60**** | |
| 0.0068 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | C323A682-40**** | 0.0033 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C332-60**** | 0.0033 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D332-60**** | |
| 0.0082 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C323A822-40**** | 0.0039 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C392-60**** | 0.0039 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D392-60**** | |
| 0.010 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | C323A103-40**** | 0.0047 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C472-60**** | 0.0047 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323D472-60**** | |
| 0.0022 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A222-60**** | 0.0056 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C562-60**** | 0.0056 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323D562-60**** | |
| 0.0027 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A272-60**** | 0.0068 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323C682-60**** | 0.0068 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323D682-60**** | |
| 0.0033 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A332-60**** | 0.0082 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323C822-60**** | 0.0082 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323D822-60**** | |
| 0.0039 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A392-60**** | 0.010 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323C103-60**** | 0.010 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323D103-60**** | |
| 0.0047 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A472-60**** | 0.012 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323C123-60**** | 0.012 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C323D123-60**** | |
| 0.0056 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A562-60**** | 0.015 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323C153-60**** | 0.015 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C323D153-60**** | |
| 0.0068 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A682-60**** | 0.018 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323C183-60**** | 0.018 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C323D183-60**** | |
| 0.0082 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A822-60**** | 0.022 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C323C223-60**** | 0.022 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C323D223-60**** | |
| 0.010 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A103-60**** | 0.027 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C323C273-60**** | 0.0068 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323D682-90**** | |
| 0.012 | 17.5 | 11.0 | 5.0 | 15.0 | 0.8 | C323A123-60**** | 0.033 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C323C333-60**** | 0.0082 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323D822-90**** | |
| 0.015 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323A153-60**** | 0.039 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C323C393-60**** | 0.010 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323D103-90**** | |
| 0.018 | 17.5 | 12.0 | 6.0 | 15.0 | 0.8 | C323A183-60**** | 0.047 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C323C473-60**** | 0.012 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323D123-90**** | |
| 0.022 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323A223-60**** | 0.015 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323C153-90**** | 0.015 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323D153-90**** | |
| 0.027 | 17.5 | 13.5 | 7.5 | 15.0 | 0.8 | C323A273-60**** | 0.018 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323C183-90**** | 0.018 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C323D183-90**** | |
| 0.033 | 17.5 | 14.5 | 8.5 | 15.0 | 0.8 | C323A333-60**** | 0.022 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323C223-90**** | 0.022 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C323D223-90**** | |
| 0.039 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C323A393-60**** | 0.027 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C323C273-90**** | 0.027 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C323D273-90**** | |
| 0.047 | 17.5 | 16.0 | 10.0 | 15.0 | 0.8 | C323A473-60**** | 0.033 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C323C333-90**** | 0.033 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C323D333-90**** | |
| 0.056 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C323A563-60**** | 0.039 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C323C393-90**** | 0.039 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C323D393-90**** | |
| 0.068 | 17.5 | 19.0 | 11.0 | 15.0 | 0.8 | C323A683-60**** | 0.047 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C323C473-90**** | 0.047 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323D473-90**** | |
| 0.018 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323A183-90**** | 0.056 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C323C563-90**** | 0.056 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323D563-90**** | |
| 0.022 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323A223-90**** | 0.068 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323C683-90**** | | | | | | | | |
| 0.027 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323A273-90**** | 0.082 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323C823-90**** | | | | | | | | |
| 0.033 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323A333-90**** | 0.10 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323C104-90**** | | | | | | | | |
| 0.039 | 26.5 | 15.0 | 6.0 | 22.5 | 0.8 | C323A393-90**** | | | | | | | | | | | | | | | |
| 0.047 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C323A473-90**** | | | | | | | | | | | | | | | |
| 0.056 | 26.5 | 16.0 | 7.0 | 22.5 | 0.8 | C323A563-90**** | | | | | | | | | | | | | | | |
| 0.068 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C323A683-90**** | | | | | | | | | | | | | | | |
| 0.082 | 26.5 | 17.0 | 8.5 | 22.5 | 0.8 | C323A823-90**** | | | | | | | | | | | | | | | |
| 0.10 | 26.5 | 18.5 | 10.0 | 22.5 | 0.8 | C323A104-90**** | | | | | | | | | | | | | | | |
| 0.12 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323A124-90**** | | | | | | | | | | | | | | | |
| 0.15 | 26.5 | 22.0 | 12.0 | 22.5 | 0.8 | C323A154-90**** | | | | | | | | | | | | | | | |

备注 Note: 1. “-”表示容量偏差。 “-”=capacitance tolerance code. M=±20%, K=±10%, J=±5%, H=±3%, G=±2%。
2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code (refer to table 1).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [FARATRONIC](#) manufacturer:

Other Similar products are found below :

[703-6G](#) [82EC1100DQ50K](#) [MMWAF150KME](#) [PCY2130F30153](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [DPM16S56K-1F](#)
[EEC2G505HQA406](#) [B32234-.033@250V-K](#) [B32520C6332K000](#) [B32522C6104K000](#) [B32523Q3155J](#) [B32676E6755K](#) [B81133-C1104-M3](#)
[MTC355L1](#) [217-0716-001](#) [PA225L30](#) [CB182K0184J--](#) [KP1830-247/061-G](#) [274ACF4400WA0J](#) [SCD105K122A3-22](#) [SCD205K122A3-24](#)
[A521HP102M400C](#) [F601BL225K063CL60A](#) [PCX2339F65224](#) [PCX2339F65334](#) [2222 368 55105](#) [2222 370 21683](#) [QXL2E473KTPT](#)
[445450-1](#) [B32524Q6155J](#) [46KI3100JBM1K](#) [MKP 1839-215-633](#) [MKP 1840-447-165](#) [MKP383510063JKP2T0](#) [WMC08P22](#)
[46KN410000N1K](#) [46KR368050M1M](#) [ECQ-W4223KZ](#) [EEC2G805HQA415](#) [PA103L30](#) [82DC3100DQ50J](#) [82DC4100AA60K](#)
[82EC2150DQ50K](#) [WMF1D68](#) [PHE841ED6150MR17T0](#) [VEA105K50](#) [82EC2220DQ50J](#) [F850AG102M300C](#)