


## 电容降压专用金属化聚丙烯膜交流电容器 (X2类) Metallized polypropylene film A.C. capacitor for capacitive divider(Class X2)

### ■ 外形图 Outline Drawing

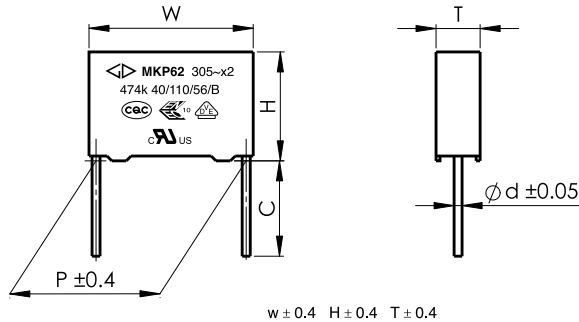

### ■ 特点

- 专门设计用于与100Vac ~ 240Vac电源串联的电容降压电路场合，如电表、LED模块等
- 金属化聚丙烯
- 自愈性能优异，能承受浪涌电压冲击
- 长期负载下优异的电容容量稳定性
- 优异的防潮性能
- 优异的阻燃性能

### ■ Features

- This is specifically designed for applications in serial with the 100Vac ~ 240Vac main, i.e.: capacitive divider, for example, energy meter, LED driver etc
- Metallized polypropylene structure
- Good self-healing properties,withstanding surge voltage stressing
- Long stability of capacitance
- Good properties in damp environment
- Excellent active and passive flame resistant abilities

### ■ 安全认证 Safety Approvals

●		CQC (中国)	IEC 60384-14:2013, X2, 305Vac/275Vac, 0.0010 μF-50.0 μF, 40/110/56/B 证书号(Certificate No.): CQC03001002875
●		ENEC-VDE (欧盟)	EN 60384-14:2013, X2, 305Vac/275Vac, 0.0010 μF-50.0 μF, 40/110/56/B 证书号(Certificate No.): 40000358
●		UL/CUL (美国/加拿大)	UL 60384-14:2009, CSA E60384-14:09, X2, 305Vac/275Vac, 0.0010 μF-50.0 μF, 40/110/56/B 证书号(File No.): E186600, CCN: FOWX2/8
●		KC (韩国)	K 60384-14(2006-12), X2, 305Vac/275Vac, 0.0010 μF-3.0 μF, 40/110/56/B 证书号(Certificate No.): SU03060-12001A/12002/12003/12004

### ■ 技术要求 Specifications

引用标准 Reference Standard	GB/T 6346.14 (IEC 60384-14)	
电容器类别 Class	X2 类	
气候类别 / 阻燃等级 Climatic Category/Passive Flammability Category	40/110/56/B	
工作温度范围 Operating Temperature Range	-40°C ~ +110°C	
额定电压 Rated Voltage ( $U_R$ )	305Vac, 50/60Hz	
电容量范围 Capacitance Range	0.010μF ~ 2.2μF (可按要求制作其他电容量) (available on request)	
电容量偏差 Capacitance Tolerance	± 10% ( K ), ± 20% ( M ) (Other tolerance available on request)	
耐电压 Voltage Proof	引线之间 Between Terminals:	4.3 $U_R$ (dc), 2s
	极壳之间 Between Terminals To Case:	2 120Vac, 1min
承受的脉冲电压 Endure impulse voltage	2 500V	
绝缘电阻 Insulation Resistance	R ≥ 15 000MΩ, $C_N \leq 0.33\mu F$ RC <sub>N</sub> ≥ 5 000s, $C_N > 0.33\mu F$ (20°C, 100V, 1min)	
损耗角正切 Dissipation Factor (tan δ)	≤ 10 × 10 <sup>-4</sup> (1kHz,20°C)	典型值 Typical value 3 × 10 <sup>-4</sup>
	≤ 20 × 10 <sup>-4</sup> (10kHz,20°C)	典型值 Typical value 8 × 10 <sup>-4</sup>



**MKP62**  
Code: C42(E)

**产品编码说明 Part number system**

■ 18位产品代码如下:

**The 18 digits part number is formed as follow:**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	4	2								E							

第1~3位	型号代码	Digit 1 to 3	Series code
	C42=MKP62		C42=MKP62
第4~5位	交流额定电压	Digit 4 to 5	AC rated voltage
	Q2=305V		Q2=305V
第6~8位	标称容量	Digit 6 to 8	Rated capacitance value
	举例: 474=47 × 10 <sup>4</sup> pF=0.47μF		For example: 474=47 × 10 <sup>4</sup> pF=0.47μF
第9位	容量等级	Digit 9	Capacitance tolerance
	K= ± 10% M= ± 20%		K= ± 10%, M= ± 20%
	N=0 ~ +10% 1=+4% ~ +14%		N=0 ~ +10% 1=+4% ~ +14%
	2= 0 ~ -10% 3=-5% ~ -14%		2= 0 ~ -10% 3=-5% ~ -14%
第10位	引线脚距P	Digit 10	Pitch
	4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm		4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm
第11位	内部特征码	Digit 11	Internal use
第12~15位	引线形状和包装代码	Digit 12 to 15	Lead form and packaging code
第16~18位	内部特征码	Digit 16 to 18	Internal use

■ **Table 1 引线形状和包装代码 lead form and packaging code**

第 12 位 Digit 12		第 13 位和第 14 位 Digit 13 and 14		第 15 位 Digit 15	
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation
C	直脚 straight lead “C” in the figure above	00	标准的引线长度 (18mm ~ 26mm) standard lead length	0	引线长度偏差 ±0.5mm 或标准长度 Length tolerance ±0.5mm Or standard length
		45	引线长度 4.5mm lead length 4.5mm		

■ 外形尺寸 Dimensions ( mm )

305Vac								
C <sub>N</sub> ( $\mu$ F)	tolerance	marking	W	H	T	P	d	Part number
0.010	±5%	K	13.0	9.0	4.0	10.0	0.6	C42Q2103K4E****+++
0.022	±5%	K	13.0	11.0	5.0	10.0	0.6	C42Q2223K4E****+++
0.033	±5%	K	13.0	12.0	6.0	10.0	0.6	C42Q2333K4E****+++
0.047	±5%	K	13.0	12.0	6.0	10.0	0.6	C42Q2473K4E****+++
0.010	±5%	K	17.5	11.0	5.0	15.0	0.6	C42Q2103K6E****+++
0.015	±5%	K	17.5	11.0	5.0	15.0	0.6	C42Q2153K6E****+++
0.022	±5%	K	17.5	11.0	5.0	15.0	0.6	C42Q2223K6E****+++
0.033	±5%	K	17.5	11.0	5.0	15.0	0.6	C42Q2333K6E****+++
0.047	±5%	K	17.5	11.0	5.0	15.0	0.6	C42Q2473K6E****+++
0.068	±5%	K	17.5	12.0	6.0	15.0	0.6	C42Q2683K6E****+++
0.10	±5%	K	17.5	13.5	7.5	15.0	0.6	C42Q2104K6E****+++
0.15	±5%	K	17.5	14.5	8.5	15.0	0.6	C42Q2154K6E****+++
0.22	±5%	K	17.5	16.0	10.0	15.0	0.8	C42Q2224K6E****+++
0.33	±5%	K	17.5	19.0	11.0	15.0	0.8	C42Q2334K6E****+++
0.15	±5%	K	26.5	15.0	6.0	22.5	0.8	C42Q2154K9E****+++
0.18	±5%	K	26.5	16.0	7.0	22.5	0.8	C42Q2184K9E****+++
0.22	±5%	K	26.5	16.0	7.0	22.5	0.8	C42Q2224K9E****+++
0.27	±5%	K	26.5	17.0	8.5	22.5	0.8	C42Q2274K9E****+++
0.33	±5%	K	26.5	17.0	8.5	22.5	0.8	C42Q2334K9E****+++
0.39	±5%	K	26.5	18.5	10.0	22.5	0.8	C42Q2394K9E****+++
0.39	0 ~ +10%	K	26.5	18.5	10.0	22.5	0.8	C42Q2394N9E****+++
0.39	+4% ~ +14%	M	26.5	18.5	10.0	22.5	0.8	C42Q239419E****+++
0.47	-14% ~ -5%	M	26.5	18.5	10.0	22.5	0.8	C42Q247439E****+++
0.47	-10% ~ 0	K	26.5	20.0	11.0	22.5	0.8	C42Q247429E****+++
0.47	±5%	K	26.5	20.0	11.0	22.5	0.8	C42Q2474K9E****+++
0.47	0 ~ +10%	K	26.5	20.0	11.0	22.5	0.8	C42Q2474N9E****+++
0.56	±5%	K	26.5	18.5	10.0	22.5	0.8	C42Q2564K9E****+++
0.56	0 ~ +10%	K	26.5	18.5	10.0	22.5	0.8	C42Q2564N9E****+++
0.60	±5%	K	26.5	20.0	11.0	22.5	0.8	C42Q2604K9E****+++
0.68	±5%	K	26.5	20.0	11.0	22.5	0.8	C42Q2684K9E****+++
0.68	0 ~ +10%	K	26.5	20.0	11.0	22.5	0.8	C42Q2684N9E****+++
0.75	±5%	K	26.5	20.0	11.0	22.5	0.8	C42Q2754K9E****+++
0.82	±5%	K	26.5	22.0	12.0	22.5	0.8	C42Q2824K9E****+++
0.87	±5%	K	26.5	22.0	12.0	22.5	0.8	C42Q2874K9E****+++
0.91	±5%	K	26.5	22.0	12.0	22.5	0.8	C42Q2914K9E****+++
1.0	±5%	K	26.5	22.0	12.0	22.5	0.8	C42Q2105K9E****+++
0.39	±5%	K	32.0	18.0	9.0	27.5	0.8	C42Q2394KBE****+++
0.47	±5%	K	32.0	18.0	9.0	27.5	0.8	C42Q2474KBE****+++
0.56	±5%	K	32.0	20.0	11.0	27.5	0.8	C42Q2564KBE****+++
0.56	0 ~ +10%	K	32.0	20.0	11.0	27.5	0.8	C42Q2564NBE****+++
0.60	±5%	K	32.0	20.0	11.0	27.5	0.8	C42Q2604KBE****+++
0.68	±5%	K	32.0	20.0	11.0	27.5	0.8	C42Q2684KBE****+++
0.68	0 ~ +10%	K	32.0	20.0	11.0	27.5	0.8	C42Q2684NBE****+++
0.82	±5%	K	32.0	22.0	13.0	27.5	0.8	C42Q2824KBE****+++
1.0	±5%	K	32.0	22.0	13.0	27.5	0.8	C42Q2105KBE****+++
1.2	±5%	K	32.0	28.0	14.0	27.5	0.8	C42Q2125KBE****+++
1.5	±5%	K	32.0	28.0	14.0	27.5	0.8	C42Q2155KBE****+++
1.8	±5%	K	32.0	30.0	16.0	27.5	0.8	C42Q2185KBE****+++
2.2	±5%	K	32.0	33.0	18.0	27.5	0.8	C42Q2225KBE****+++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, K=±10%, M=±20%  
 2. “\*\*\*\*”表示引线形状和包装代码(见table 1)。“\*\*\*\*”=lead form and packing code( refer to table 1)  
 3. 380Vac电源场合建议使用MKP65。详细请与技术人员联系。  
 If used in the 380Vac ,Pls refer to MKP65 . Pls contact our technical engineer for more details.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Safety Capacitors](#) category:*

*Click to view products by [FARATRONIC](#) manufacturer:*

Other Similar products are found below :

[B32022B3223K026](#) [B32912A3104K026](#) [B81123C1102M003](#) [MKPY2-.02230020P15](#) [46KN333000M1M](#) [46KN422000P0M](#)  
[46KR422000M1K](#) [MP1125KRE6RLC](#) [MP2683KGC2XLC](#) [MP2124KGC3XLC](#) [MP2684KGD4XLC](#) [MP2474KGE1XLC](#) [46KF268000M1M](#)  
[46KI3150NDM2M](#) [PHE840MD6220MD13R30](#) [PHE840MY6470MD14R06](#) [PHE845VD5470MR06](#) [R463N4100ZAM1K](#) [MKPX2R-](#)  
[1/400/10P27](#) [YP500101K040B20C2P](#) [YU0AH222M090DAMD0B](#) [LS1808N102K302NX080TM](#) [CY1471KE1IEB46X2A2](#)  
[CY1222ME5IEE48O2A2](#) [MPX474K31DTEV158G0](#) [Y2560K-D1I-B4-AC250V](#) [HMF222MG3BW](#) [CY1471ME19EE45W2A2](#)  
[MPX104K31D2KN158HF](#) [MPX224K31D2KN158G0](#) [PX104K2W1502](#) [MP2224K32C5J6LC](#) [H102M050FQ55250L750A](#)  
[MP2474K32D6R8LC](#) [MP2224K32C3J6LC](#) [MP2104K32C3J6LC](#) [PX334K2C1006](#) [YU0AC222M080L20C7B](#) [MP2473K27B2X6LC](#)  
[MP2224K32D4J8LC](#) [MP2684K32D6T8LC](#) [ST3Y1Y5U332M500VAC](#) [ST3Y1Y5V472M500VAC](#) [MP2474K32D4X8LC](#)  
[MP2474K32D4J8LC](#) [YU0AH332M110L4EB0B](#) [CY1681ME1IEE45S2A2](#) [Y1220J-E1I-B4-AC400V](#) [Y1120K-E1I-B4-AC400V](#)  
[MP2154K32D2R8LC](#)