



SMSC

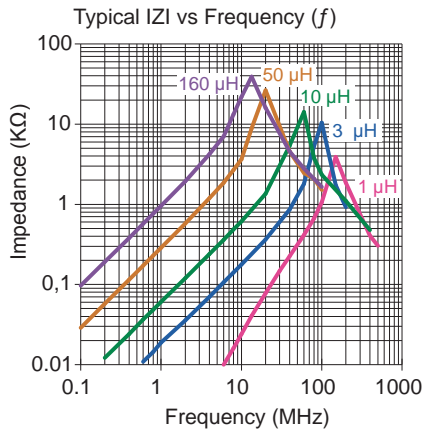

L (μH)	A (max)
1 - 23	17
50 - 160	19

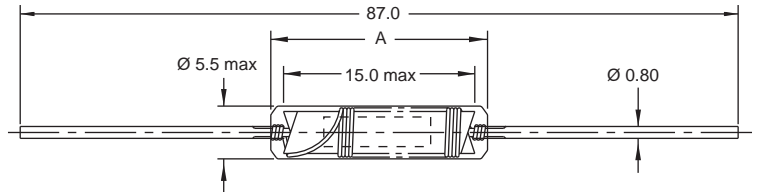

	Part No	Inductance	f _L	ToI	DCR	Rated DC
		L (μH)	(kHz)	± (%)	max (mΩ)	Current (A)
Single layer	SMSC-1R0M-01	1	1000	20	14	6
	SMSC-2R0M-01	2	1000	20	24	4
	SMSC-3R0M-01	3	1000	20	46	3
	SMSC-6R0M-01	6	1000	20	144	2
	SMSC-100M-01	10	1000	20	276	1.5
	SMSC-230M-01	23	100	20	876	0.7
	SMSC-500M-01	50	100	20	3600	0.4
	SMSC-700M-01	70	100	20	5400	0.3
	SMSC-161M-01	160	100	20	21600	0.15

Core Material : Iron Dust

Revision date : 09 May 2017

SPQ :	Packing Form	Taped / Reel
	Axial	1500 [-01]

Remarks :

- Available also without insulating material (SMSC/B).
- Single layer - Model with Insulation Foil are suitable for application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).

Suppression Coils

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Fastron](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)