



N 沟道增强型场效应晶体管

N-CHANNEL MOSFET

FHP20N50A/FHF20N50A

### 主要参数 MAIN CHARACTERISTICS

ID	20A
VDSS	500 V
Rdson-typ (@Vgs=10V)	0.21Ω
Qg-typ	50nC

### 用途 APPLICATIONS

高频开关电源	High efficiency switch mode power supplies
功率因数校正	Power factor correction


### 产品特性 FEATURES

低栅极电荷	Low gate charge
低 Crss (典型值 27pF)	Low Crss (typical 27pF )
开关速度快	Fast switching
100% 经过雪崩测试	100% avalanche tested
高抗 dv/dt 能力	Improved dv/dt capability
RoHS 产品	RoHS product

### 封装形式 Package



### 等效电路 Equivalent Circuit



### 绝对最大额定值 ABSOLUTE RATINGS (Tc=25°C)

项目 Parameter	符号 Symbol	数值 Value		单位 Unit
		FHP20N50A	FHF20N50A	
最高漏极—源极直流电压 Drain-Source Voltage	VDS	500		V
连续漏极电流* Drain Current -continuous *	I <sub>D</sub> (Tc=25°C)	20		A
	I <sub>D</sub> (Tc=100°C)	12.9		A
最大脉冲漏极电流 (注 1) Drain Current – pulse (note 1)	I <sub>DM</sub>	80		A
最高栅源电压 Gate-Source Voltage	V <sub>G</sub> S	±30		V
单脉冲雪崩能量 (注 2) Single Pulsed Avalanche Energy (note 2)	E <sub>A</sub> S	1110		mJ
雪崩电流 (注 1) Avalanche Current (note 1)	I <sub>AR</sub>	20		A
重复雪崩能量 (注 1) Repetitive Avalanche Current (note 1)	E <sub>AR</sub>	25		mJ
二极管反向恢复最大电压变化速率 (注 3) Peak Diode Recovery dv/dt (note 3)	dv/dt	5.0		V/ns
耗散功率 Power Dissipation	P <sub>D</sub> (TC=25°C)	250	38.5	W
	-Derate above 25°C	2.0	0.3	W/°C
最高结温及存储温度 Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~+175		°C
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T <sub>L</sub>	300		°C

\*漏极电流由最高结温限制

\*Drain current limited by maximum junction temperature

## 电特性 ELECTRICAL CHARACTERISTICS

项目 <b>Parameter</b>	符号 <b>Symbol</b>	测试条件 <b>Tests conditions</b>	最小 <b>Min</b>	典型 <b>Typ</b>	最大 <b>Max</b>	单位 <b>Units</b>	
<b>关态特性 Off -Characteristics</b>							
漏—源击穿电压 Drain-Source Voltage	BVDSS	Id=250μA, VGS=0V	500	-	-	V	
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	ΔBVdss/Δ TJ	Id=250μA, referenced to 25°C	-	0.5	-	V/°C	
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	Idss	VDS=500V, VGS=0V, Tc=25°C	-	-	1	μA	
		VDS=400V, Tc=125°C	-	-	10	μA	
栅极体漏电流 Gate-body leakage current	IGSS (F/R)	VDS=0V, VGS =±30V	-	-	±100	nA	
<b>通态特性 On-Characteristics</b>							
阈值电压 Gate Threshold Voltage	VGS(th)	VDS = VGS , Id=250μA	2.0	-	4.0	V	
静态导通电阻 Static Drain-Source On-Resistance	RDS(ON)	VGS =10V , Id=4.5A	-	0.21	0.26	Ω	
正向跨导 Forward Transconductance	gfs	VDS = 20V, Id=10A (note 4)	-	25	-	S	
<b>动态特性 Dynamic Characteristics</b>							
输入电容 Input capacitance	Ciss	VDS=25V, VGS =0V, f=1.0MHz	-	2550	-	pF	
输出电容 Output capacitance	Coss		-	350	-		
反向传输电容 Reverse transfer capacitance	Crss		-	27	-		
<b>开关特性 Switching Characteristics</b>							
延迟时间 Turn-On delay time	td(on)	VDS=250V, Id=20A, RG=25Ω VGS =10V (note 4, 5)	-	45	-	ns	
上升时间 Turn-On rise time	tr		-	120	-	ns	
延迟时间 Turn-Off delay time	td(off)		-	100	-	ns	
下降时间 Turn-Off Fall time	tf		-	60	-	ns	
栅极电荷总量 Total Gate Charge	Qg	VDS =400V , Id=20A , VGS =10V (note 4, 5)	-	50	-	nC	
栅—源电荷 Gate-Source charge	Qgs		-	14	-	nC	
栅—漏电荷 Gate-Drain charge	Qgd		-	20	-	nC	
<b>漏—源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings</b>							
正向最大连续电流 Maximum Continuous Drain -Source Diode Forward Current	Is		-	-	20	A	
正向最大脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current	ISM		-	-	80	A	
正向压降 Drain-Source Diode Forward Voltage	VSD	VGS=0V, Is=20A	-	0.9	1.4	V	
反向恢复时间 Reverse recovery time	trr	VGS=0V, Is=20A ,dI/dt=100A/μs (note 4)	-	154	-	ns	
反向恢复电荷 Reverse recovery charge	Qrr		-	0.5	-	μC	

---

## 热特性 THERMAL CHARACTERISTIC

项目 Parameter	符号 Symbol	FHP20N50A	FHF20N50A	单位 Unit
结到管壳的热阻 Thermal Resistance, Junction to Case	R <sub>th(j-c)</sub>	0.5	3.3	°C/W
结到环境的热阻 Thermal Resistance, Junction to Ambient	R <sub>th(j-A)</sub>	62.5	62.5	°C/W

注释:


- 1: 脉冲宽度由最高结温限制
- 2: L=5mH, I<sub>AS</sub>=20A, V<sub>DD</sub>=50V, R<sub>G</sub>=25 Ω,起始结温 T<sub>J</sub>=25°C
- 3: I<sub>SD</sub> ≤ 20A, di/dt ≤ 200A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, 起始结温 T<sub>J</sub>=25°C
- 4: 脉冲测试: 脉冲宽度 ≤ 300μs, 占空比≤2%
- 5: 基本与工作温度无关

Notes:


- 1: Pulse width limited by maximum junction temperature
- 2: L=5mH, I<sub>AS</sub>=20A, V<sub>DD</sub>=50V, R<sub>G</sub>=25 Ω, Starting T<sub>J</sub>=25°C
- 3: I<sub>SD</sub> ≤ 20A, di/dt ≤ 200A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, Starting T<sub>J</sub>=25°C
- 4: Pulse Test: Pulse Width ≤ 300μs, Duty Cycle≤2%
- 5: Essentially independent of operating temperature

## Typical Performance Characteristics


### 典型特性曲线

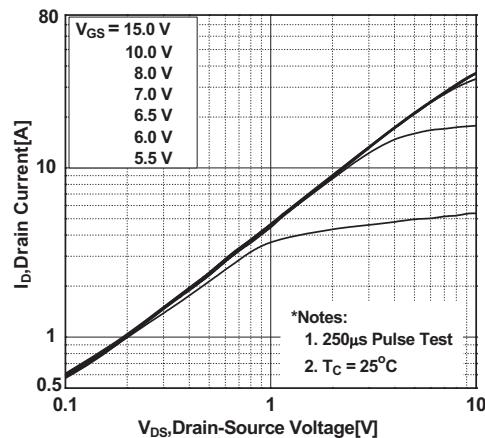


**Figure 1. On-Region Characteristics**

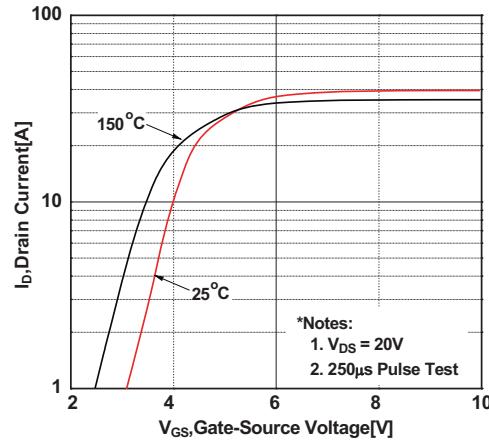


**Figure 2. Transfer Characteristics**

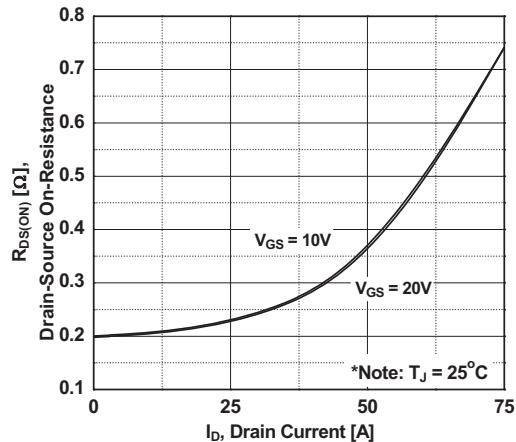


**Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage**

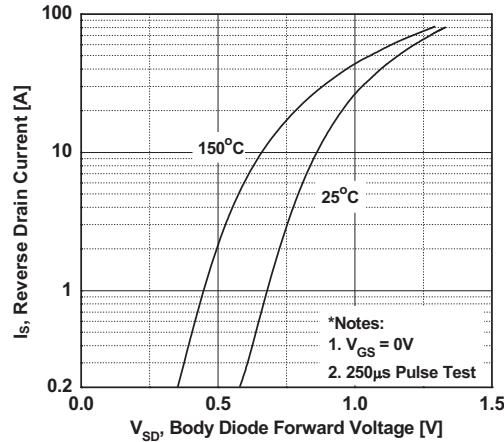

**Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature**

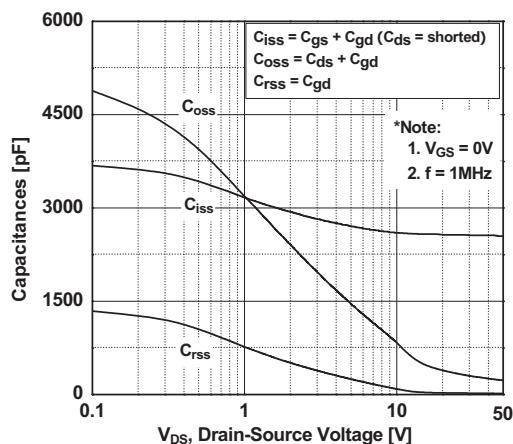


**Figure 5. Capacitance Characteristics**

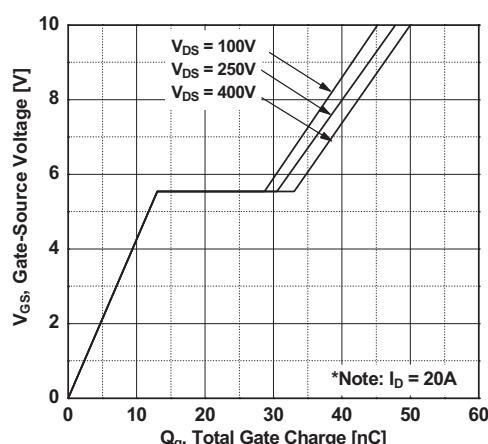


**Figure 6. Gate Charge Characteristics**

## Typical Performance Characteristics (Continued)


### 典型特性曲线 (续)

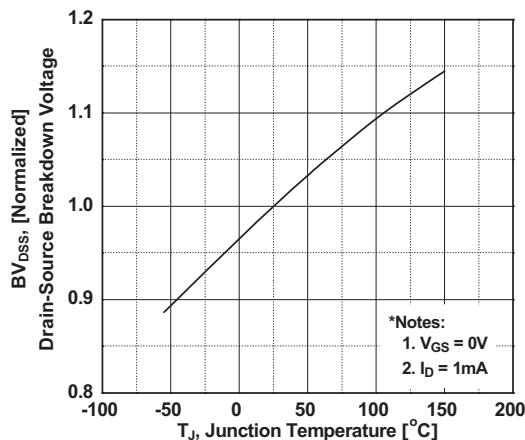


**Figure 7. Breakdown Voltage Variation vs. Temperature**

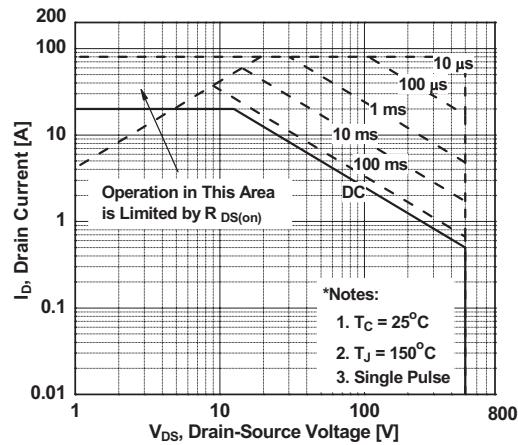


**Figure 8. Maximum Safe Operating Area - FHP20N50A**

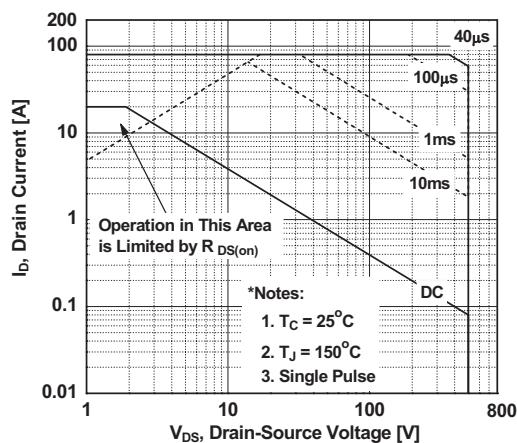

**Figure 9. Maximum Safe Operating Area - FHF20N50A**

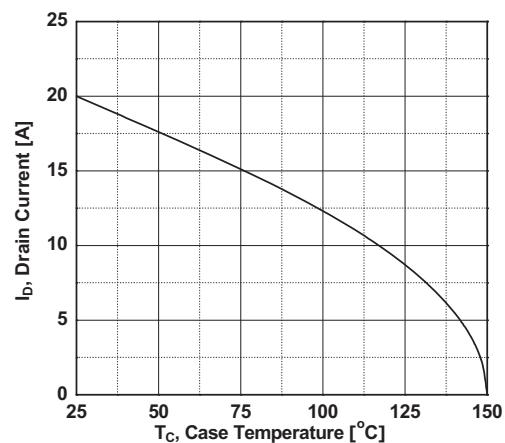

**Figure 10. Maximum Drain Current vs. Case Temperature**

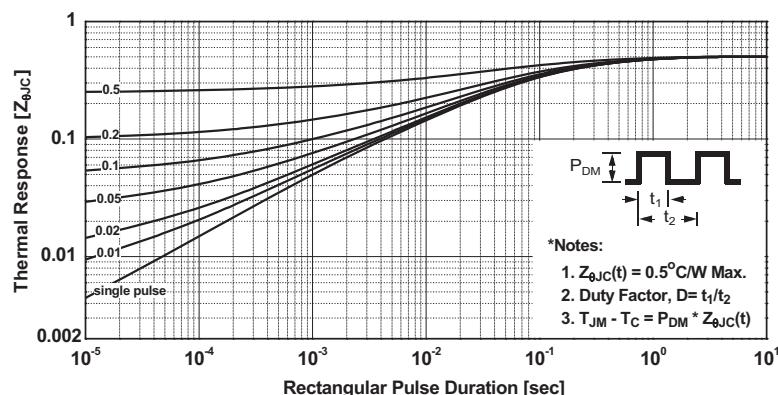

**Figure 11. Transient Thermal Response Curve - FHP20N50A**

---

## Typical Performance Characteristics (Continued)

### 典型特性曲线（续）

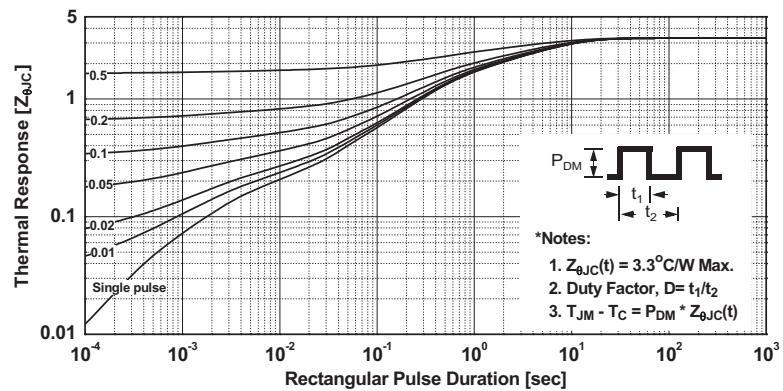


Figure 12. Transient Thermal Response Curve - FHF20N50A

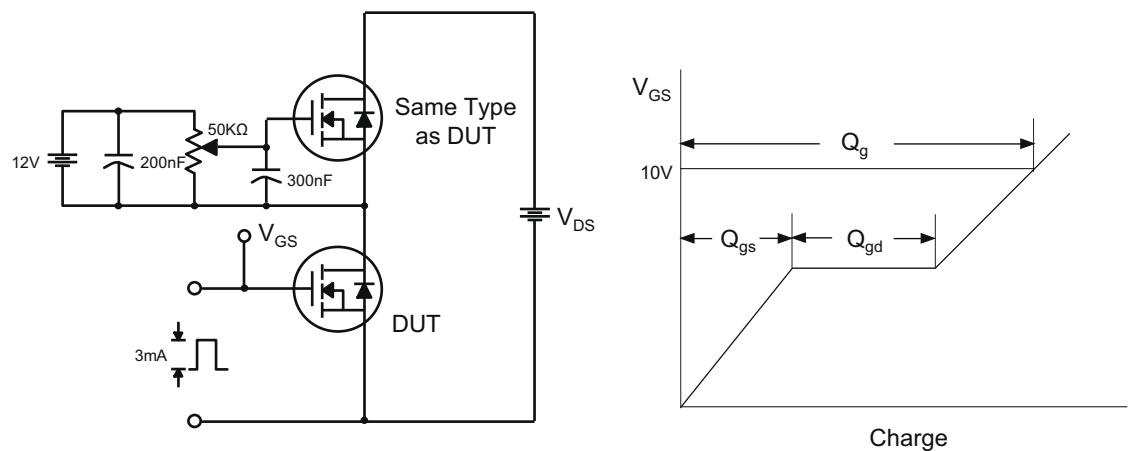


Fig 13. Gate Charge Test Circuit & Waveform

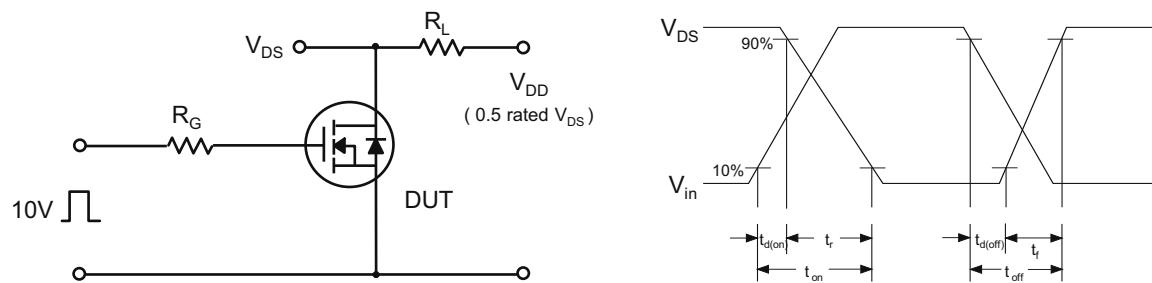


Fig 14. Resistive Switching Test Circuit & Waveforms

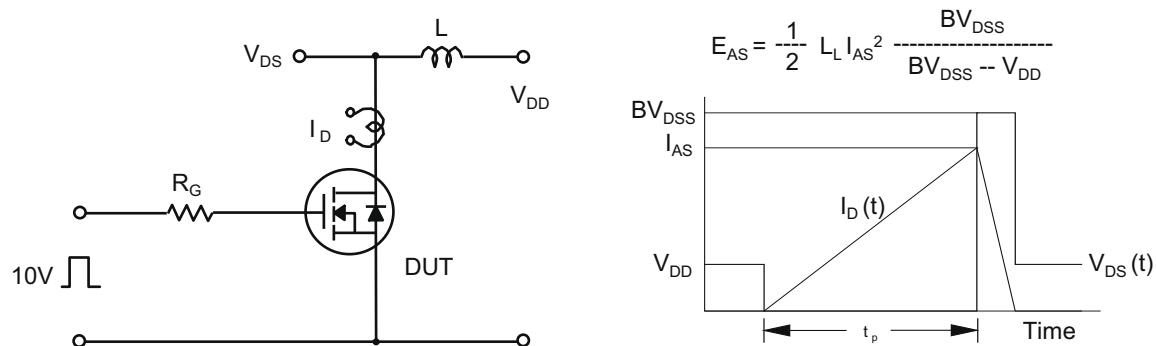


Fig 15. Unclamped Inductive Switching Test Circuit & Waveforms



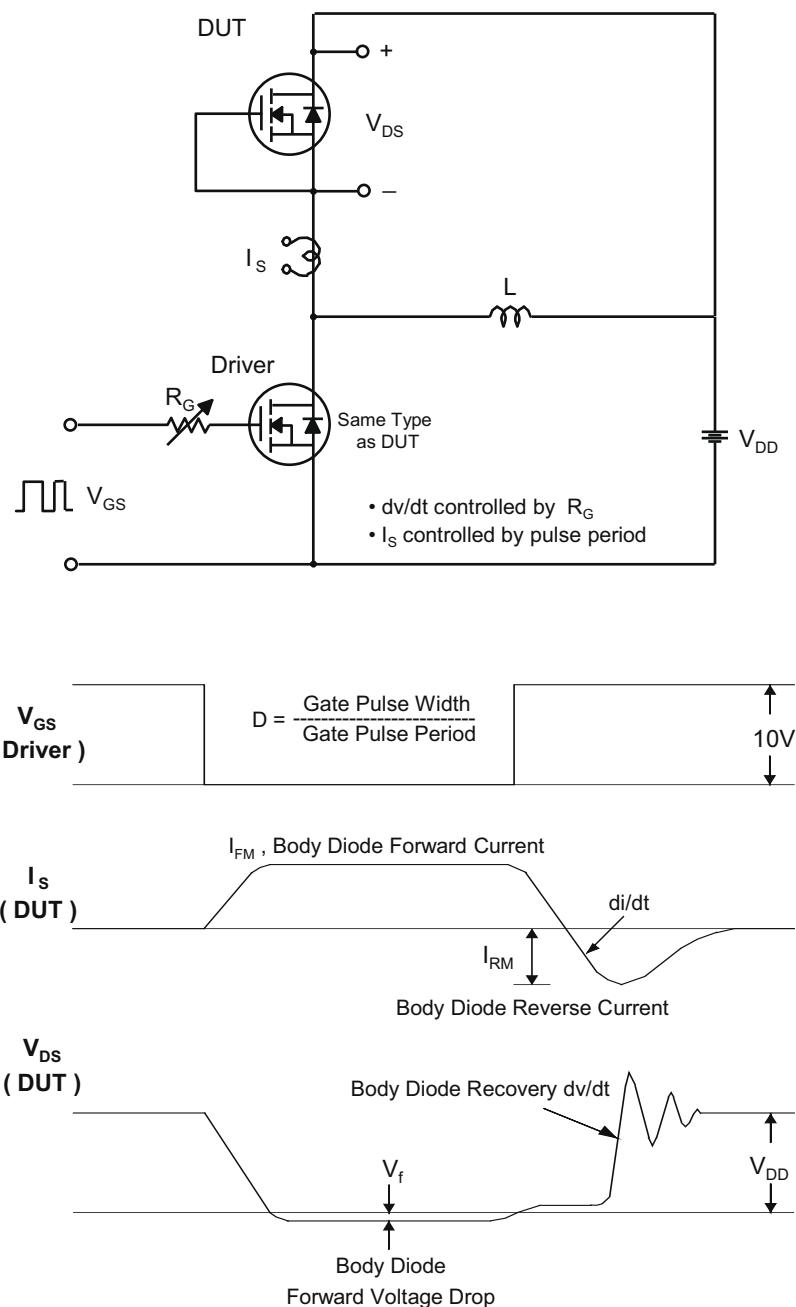


Fig 16. Peak Diode Recovery  $dv/dt$  Test Circuit & Waveforms


**印记 Marking:**

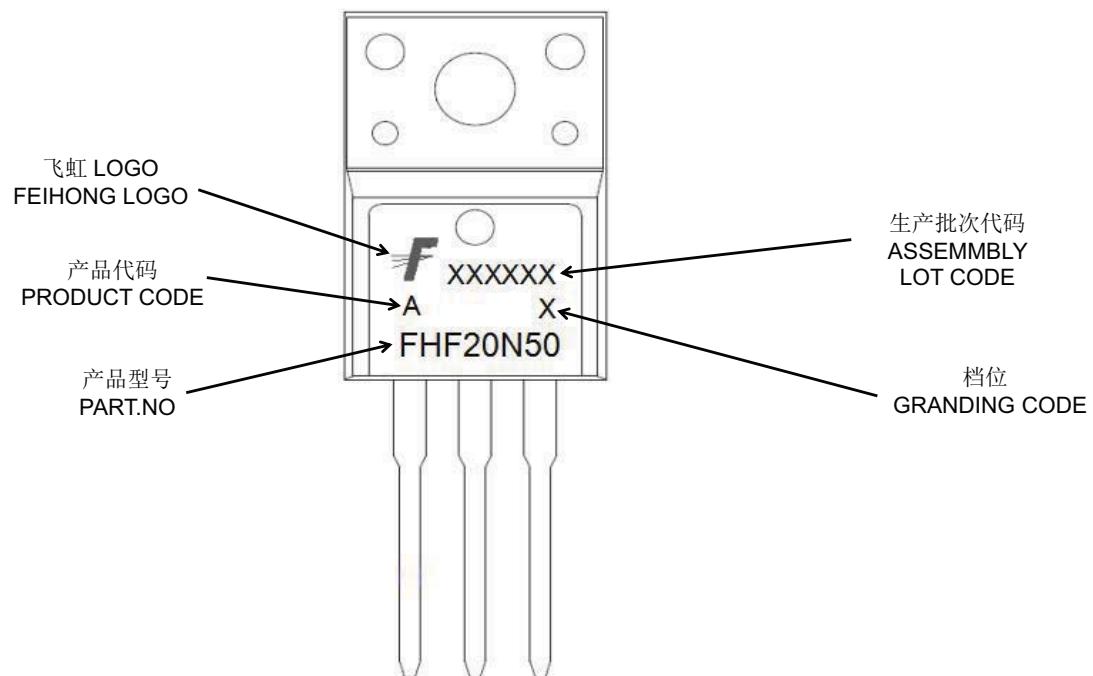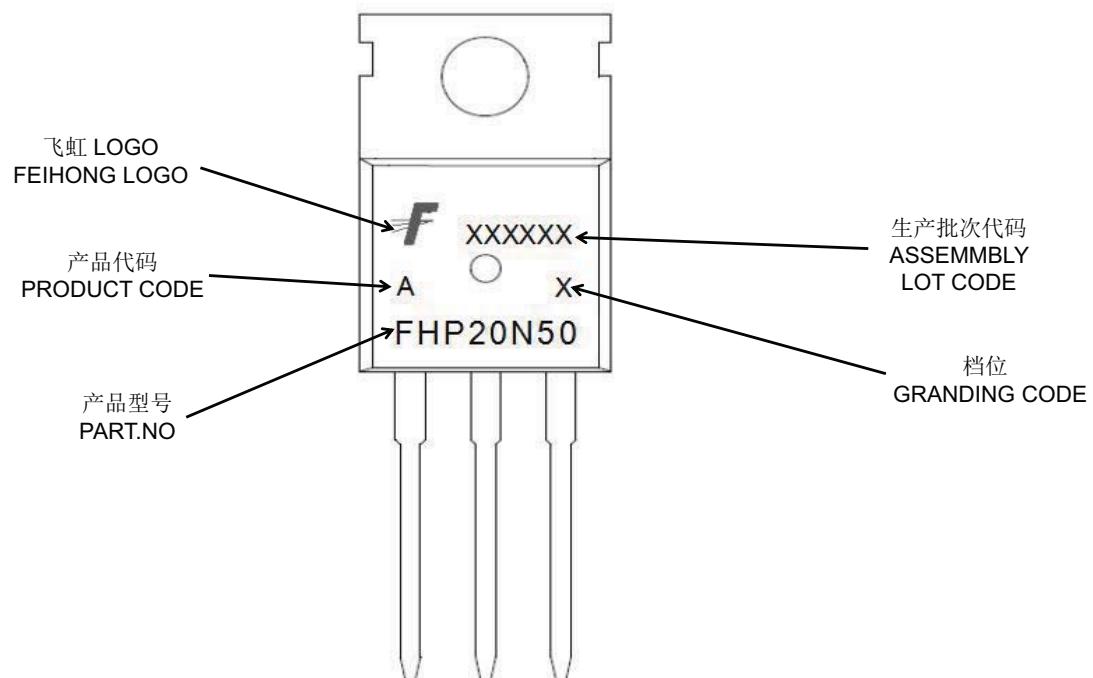

外形尺寸:

Package Dimension:

TO-220

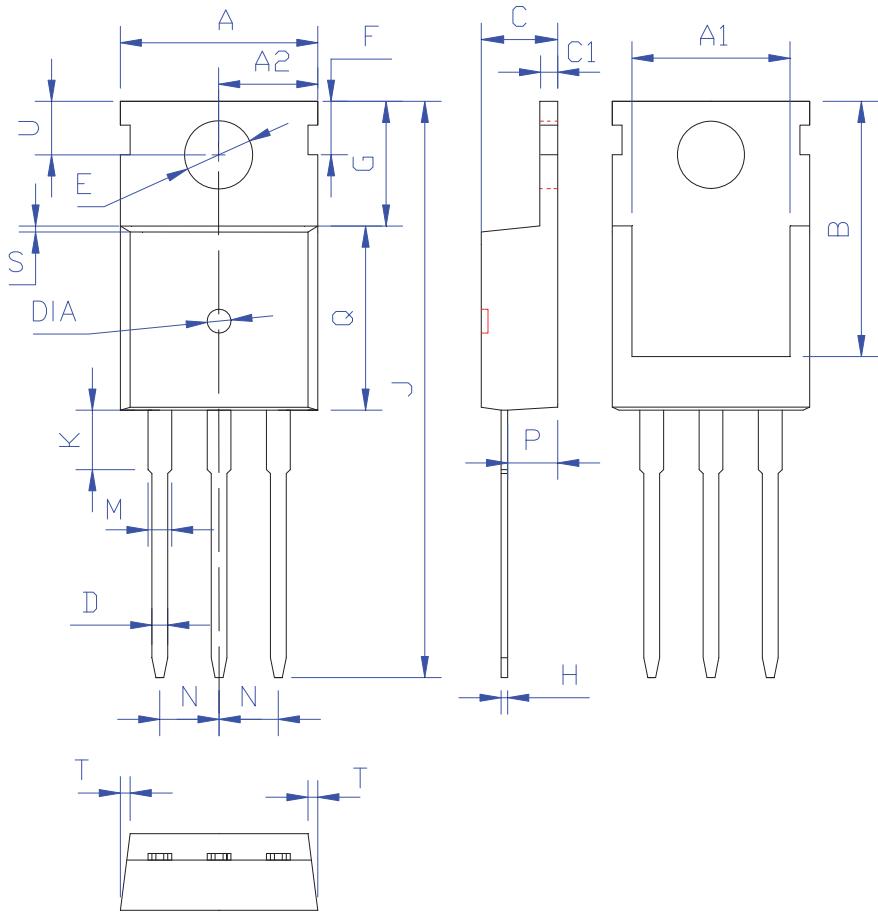


DIM	MILLIMETERS
A	10.00±0.30
A1	8.00±0.30
A2	5.00±0.30
B	13.20±0.40
C	4.50±0.20
C1	1.30±0.20
D	0.80±0.20
E	3.60±0.20
F	3.00±0.30
G	6.60±0.40
H	0.50±0.20
J	28.88±0.50
K	3.00±0.30
M	1.30±0.30
N	Typical 2.54
P	2.40±0.40
Q	9.20±0.40
S	0.25±0.15
T	0.25±0.15
U	2.80±0.30
DIA	寬 1.50±0.10 深 0.50 MAX

(Unit: mm)

外形尺寸:

Package Dimension:

TO-220F

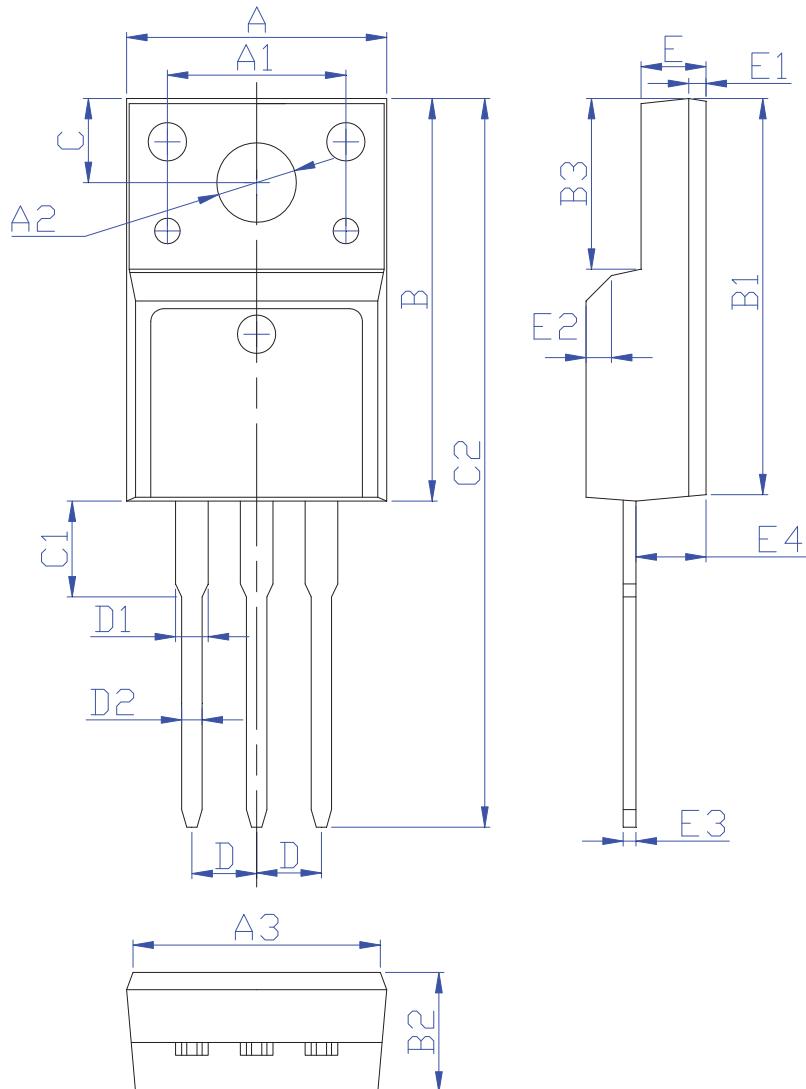

DIM	MILLIMETERS
A	10.16±0.30
A1	7.00±0.20
A2	3.12±0.20
A3	9.70±0.30
B	15.90±0.50
B1	15.60±0.50
B2	4.70±0.30
B3	6.70±0.30
C	3.30±0.25
C1	3.25±0.30
C2	28.70±0.50
D	Typical 2.54
D1	1.47 (MAX)
D2	0.80±0.20
E	2.55±0.25
E1	0.70±0.25
E2	1.0×45°
E3	0.50±0.20
E4	2.75±0.30

(Unit:mm)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by FeiHong manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)