



# 承 认 书

## APPROVAL SHEET

客户名称:

Customer

/

产品名称:

Part Name

片式负温度系数热敏电阻器

CHIP NTC THERMISTOR

产品规格:

Specification

CMF Series

版本号:

Version No.

17.01

日期:

DATE

2017-9-20



Manufacturer			Customer		
拟制	审核	确认	检验	审核	批准
Draft by	Checked by	Approve by	Check by	Checked by	Approval by
林晓华	徐雪枫	岑权进			



序号 No	目 录 TABLE OF CONTENTS
1	履 历 表 Resume
2	外形尺寸与内部结构 Dimension & Inner-configuration
3	产品品名构成 Product Spec. Model
4	电气性能 Performance Specification
5	电阻-温度特性 Resistance-Temperature Characteristics
6	可靠性 Reliability Data
7	包装 Package
8	环保情况说明 Environmental Protection Statement
9	推荐使用的焊接曲线 Recommended soldering profile
10	贮存方法 Storage Methods
11	使用注意事项 Precautions For Use
12	注意事项 Notes




## 1. 履历表 Resume

版本 Version No.	修改明细 Modify Details	日期 Date
17.01	首次发行 Initial issue	2017-9-20



## 2. 外形尺寸与内部结构 Dimension & Inner-configuration:

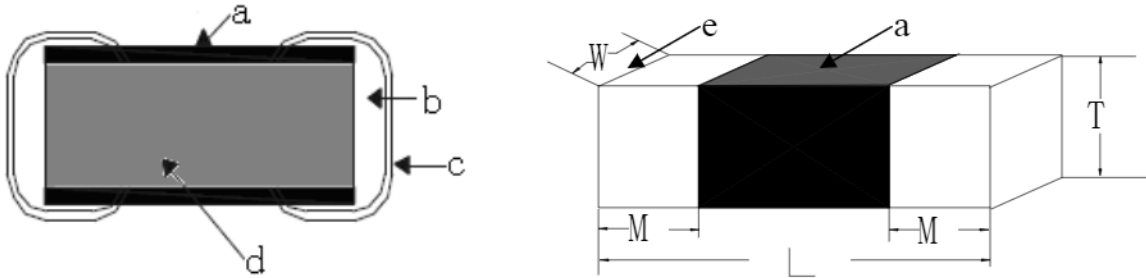

- a. 玻璃层: Gass layer
- b. 银层 Ag layer
- c. 镀层 Ni/Sn plating
- d. NTC 瓷体 NTC or ceramic
- e. 端电极 Terminal electrode

序号 No.	部位 Component		材料 Material
1	NTC瓷体 NTC or ceramic		锰钴镍 Mn-Co- Ni
2	玻璃层: Gass layer		硅铋系 Si-Bi
3	端电极	银层 Ag laye	银 Ag
	Terminal electrode	电镀层 Ni/Sn plating	镍层-锡层 Ni-Sn

单位 Unit: mm ( inch )

型号 Size	L	W	T	M
0402	1.0±0.15 (0.040±0.006)	0.5±0.10 (0.020±0.004)	0.5Max. (0.020Max. )	0.10Min. (0.004Min. )
0603	1.6±0.15 (0.063±0.006)	0.8±0.15 (0.031±0.006)	0.95Max. (0.037Max. )	0.10Min. (0.004Min. )
0805	2.0±0.20 (0.08±0.008)	1.25±0.20 (0.05±0.008)	1.25Max. (0.05Max. )	0.15Min. (0.006Min. )
1206	3.2±0.20 (0.126±0.008)	1.6±0.20 (0.063±0.008)	1.50Max. (0.060Max. )	0.20Min. (0.008Min. )



### 3. 产品品名构成 Product Spec. Model

CMF    X    XXX    X    XXXX    X    X    X    X  
①    ②    ③    ④    ⑤    ⑥    ⑦    ⑧    ⑨

① 产品代号：表示片式负温度系数热敏电阻

Product Code: Chip NTC Thermistor

② 尺寸规格代码

Size Code

代码/Code	D	A	B	C
尺寸 (英制) Size (Inches)	0402	0603	0805	1206

③ 标称电阻值 为 25℃时的零功率电阻，单位为  $\Omega$ ，  
前二位为有效数字，第三位数字表示有效数字后“0”的个数。

Rated zero-power resistance( $R_{25}$ ) Unit:  $\Omega$

The first two are significant figure of resistance and the third one expresses number of following zeros.

④ 阻值公差代码 (%)

Tolerance of  $R_{25}$  (%)

代码/ Code	E	F	G	H	J	K	X
阻值公差 Tolerance of $R_{25}$	$\pm 0.5$	$\pm 1.0$	$\pm 2.0$	$\pm 3.0$	$\pm 5.0$	$\pm 10.0$	特殊公差

⑤ B 值常数,单位为 K

B value constant Unit:K

⑥ B 值精度代码(%)

Tolerance of B value(%)

代码/ Code	E	F	G	H	J	X
B 值公差 Tolerance of B value	$\pm 0.5$	$\pm 1.0$	$\pm 2.0$	$\pm 3.0$	$\pm 5.0$	特殊公差

⑦ B 值温度代码 ( $^{\circ}\text{C}/^{\circ}\text{C}$ )

B value Temperature Code

代码/ Code	A	B	C	D	E	F	G	H	M	N
$T_1/T_2$	25/50	25/ 85	0/25	0/50	0/100	0/80	25/100	-18/25	-20/25	5/25

⑧ 端电极材料代号：N—三层电极

Termination Code: N—Nickel Barrier

⑨ 包装方式代码：T—编带包装、B—散包装

Packaging style Code: T—Tape & Reel、B—Bulk



#### 4. 电性能参数表 Electrical Characteristics List

型号规格 Part Number	尺寸	客户料号 Customer no.	零功率标称电阻 Zero Power Resistance@ 25°C		B 值 B Value		
			R <sub>25</sub> (KΩ)	ΔR <sub>25</sub> (±%)	B <sub>25/50</sub> (k)	ΔB <sub>25/50</sub> (±%)	
CMFD103□3900HANT	1005		10	1、2、3、5、 10	3900	2、3	
CMFD223□3600HANT			22		3600		
CMFD473□3950HANT			47		3950		
CMFD683□3950HANT				68	3、5、10	3950	1、2、3
CMFD104□3900HANT			100	3900			
CMFD154□4100HANT			150	4100			
CMFD224□3950HANT			220	3950			
CMFD334□3950HANT			330	3950			
CMFD474□4150HANT			470	4150			
CMFD684□4150HANT			680	4150			



型号规格 Part Number	尺寸	客户料号 Customer no.	零功率标称电阻 Zero Power Resistance@ 25°C		B 值 B Value	
			R <sub>25</sub> (KΩ)	△R <sub>25</sub> (±%)	B <sub>25/50</sub> (k)	△B <sub>25/50</sub> (±%)
CMFA102□3200HANT	1608		1.0	5、10	3200	2、3
CMFA202□3400HANT			2.0		3400	
CMFA222□3450HANT			2.2		3450	
CMFA332□3380HANT			3.3	3、5、10	3380	
CMFA472□3950HANT			4.7	5、10	3950	
CMFA502□3950HANT			5.0		3950	
CMFA682□3950HANT			6.8		3950	
CMFA103□3600HANT			10	1、2、3、5、10	3600	3
CMFA223□3300HANT			22		3300	1、2、3
CMFA303□3950HANT			30		3950	
CMFA333□3950HANT			33		3950	2、3
CMFA473□4150HANT			47		4150	1、2、3
CMFA503□4150HANT			50		4150	
CMFA683□3800HANT			68		3800	
CMFA104□4150HANT			100	4150		
CMFA154□3950HANT			150	3950		
CMFA204□4050HANT			200	4050		
CMFA224□4050HANT			220	4050		
CMFA334□4050HANT			330	4050	2、3	
CMFA474□4150HANT			470	4150		
CMFA564□4200HANT			560	4200		
CMFA684□4150HANT			680	4150		



型号规格 Part Number	尺寸	客户料号 Customer no.	零功率标称电阻 Zero Power Resistance@ 25°C		B 值 B Value		
			R <sub>25</sub> (KΩ)	ΔR <sub>25</sub> (±%)	B <sub>25/50</sub> (k)	ΔB <sub>25/50</sub> (±%)	
CMFB801□3200HANT	2012		0.8	5、10	3200	2、3	
CMFB102□3200HANT			1.0		3200		
CMFB202□3400HANT			2.0		3400		
CMFB222□3450HANT			2.2		3450		
CMFB332□3400HANT			3.3	3、5、10	3400		
CMFB472□3950HANT			4.7	5、10	3950		
CMFB502□3950HANT			5.0		3950		
CMFB682□3950HANT			6.8		3950		
CMFB103□3500HANT			10	1、2、3、5、10	3500		3
CMFB103□3600HANT			10		3600		1、2、3
CMFB203□3950HANT			20		3950		
CMFB223□3950HANT			22		3950		
CMFB303□3950HANT			30		3950	2、3	
CMFB333□3950HANT			33		3950		
CMFB473□3800HANT			47		1、2、3	3800	1、2、3
CMFB503□3800HANT			50			3800	
CMFB683□3800HANT			68			3800	
CMFB104□3950HANT			100			3950	
CMFB154□4050HANT			150	5、10	4050	2、3	
CMFB204□4050HANT			200		4050		
CMFB224□4050HANT		220	4050				
CMFB334□4200HANT		330	4200				
CMFB474□4150HANT		470	4150				






型号规格 Part Number	尺寸.	客户料号 Customer no	零功率标称电阻 Zero Power Resistance@ 25°C		B 值 B Value	
			R <sub>25</sub> (KΩ)	ΔR <sub>25</sub> (±%)	B <sub>25/50</sub> (k)	ΔB <sub>25/50</sub> (±%)
CMFC472□3900HANT	3216		4.7	1、2、3、5、 10	3900	1、2、3
CMFC502□3900HANT			5.0		3900	
CMFC682□3900HANT			6.8		3900	
CMFC103□3600HANT			10		3600	
CMFC223□3950HANT			22		3950	
CMFC473□3800HANT			47		3800	
CMFC503□3800HANT			50		3800	
CMFC683□3800HANT			68		3800	
CMFC104□3950HANT			100		3950	
CMFC224□4050HANT			220		4050	2、3
CMFC474□4150HANT			470		4150	




## 5. 电阻-温度特性 Resistance-Temperature Characteristics

CMFD103-684

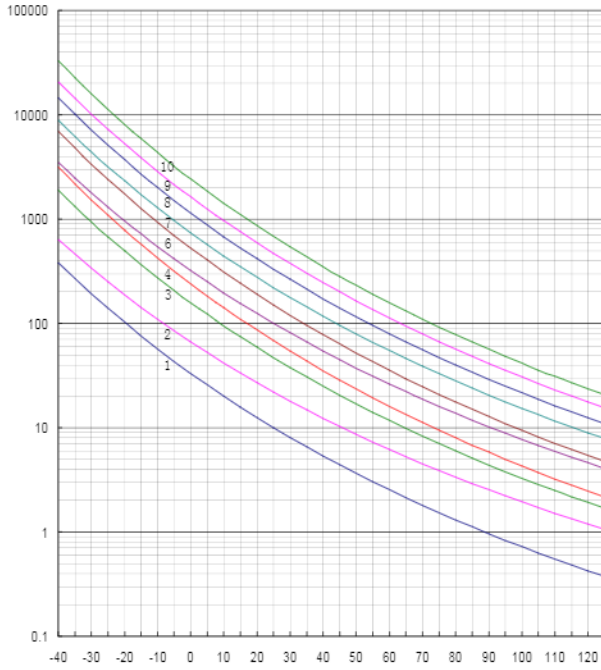


- 10. D684-4150
- 9. D474-4050
- 8. D334-4050
- 7. D224-3950
- 6. D154-4100
- 5. D104-3800
- 4. D683-4100
- 3. D473-3950
- 2. D223-3600
- 1. D103-3900

CMFA102-333

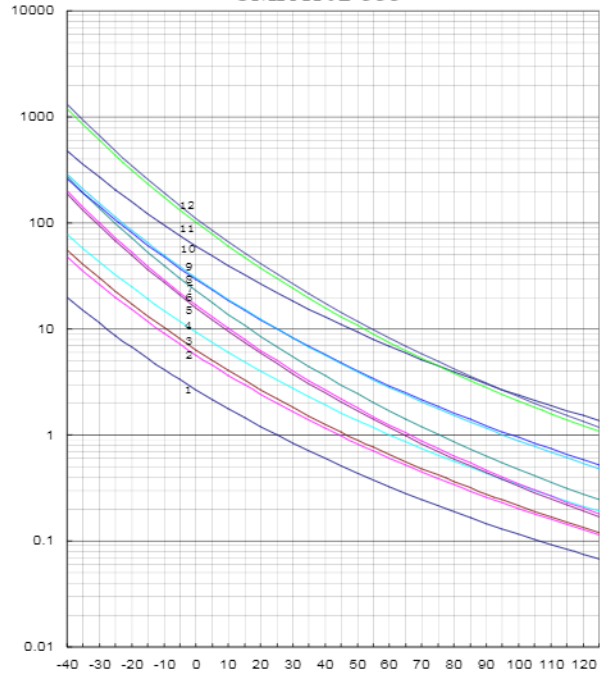


- 12. A333-3950
- 11. A303-3950
- 10. A223-3300
- 9. A103-3600
- 8. A103-3500
- 7. A682-3950
- 6. A502-3950
- 5. A472-3950
- 4. A332-3380
- 3. A222-3450
- 2. A202-3400
- 1. A102-3200

CMFA473-684

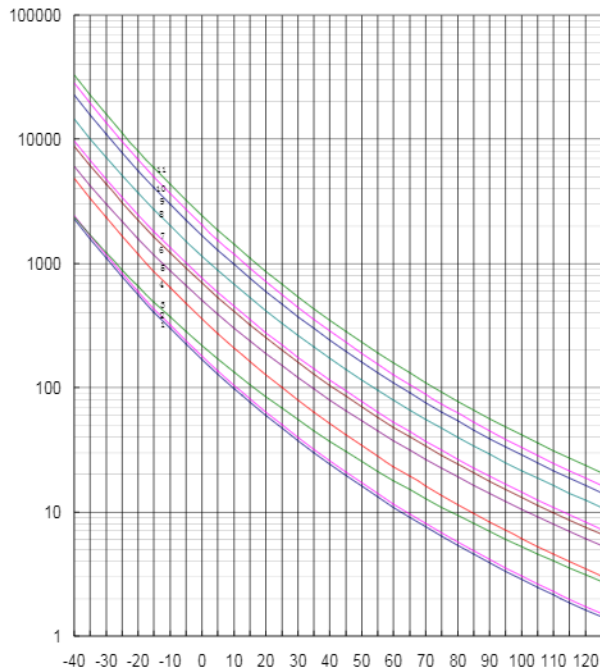

- 11. A684-4150
- 10. A560-4200
- 9. A474-4150
- 8. A334-4050
- 7. A224-4050
- 6. A204-4050
- 5. A154-3950
- 4. A104-4150
- 3. A683-3800
- 2. A503-4150
- 1. A473-4150


CMFB801-223

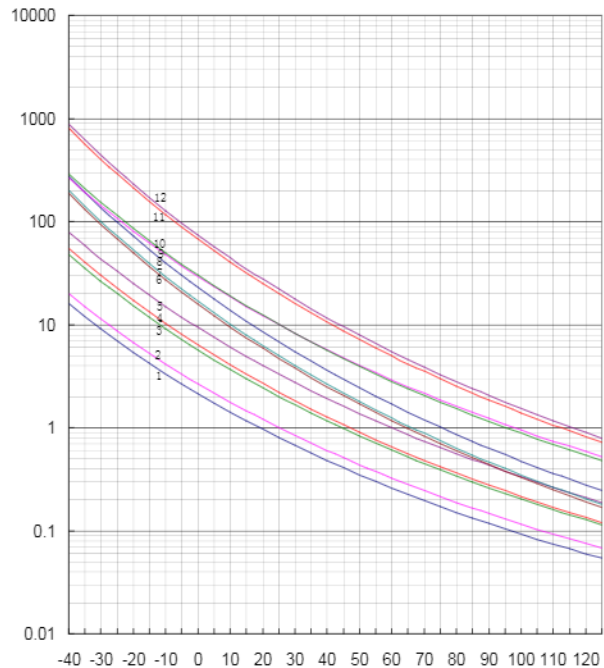

- 12. B223-3950
- 11. B203-3950
- 10. B103-3600
- 9. B103-3500
- 8. B682-3950
- 7. B502-3950
- 6. B472-3950
- 5. B332-3400
- 4. B222-3450
- 3. B202-3400
- 2. B102-3200
- 1. B801-3200




CMFB303-474

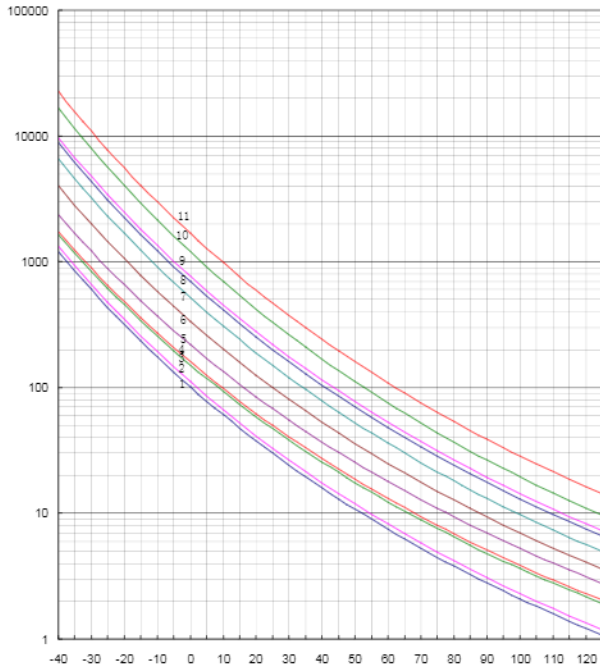

- 11. B474-4150
- 10. B334-4200
- 9. B224-4050
- 8. B204-4050
- 7. B154-4050
- 6. B104-3950
- 5. B680-3800
- 4. B503-3800
- 3. B473-3800
- 2. B333-3950
- 1. B303-3950


CMFC472-474

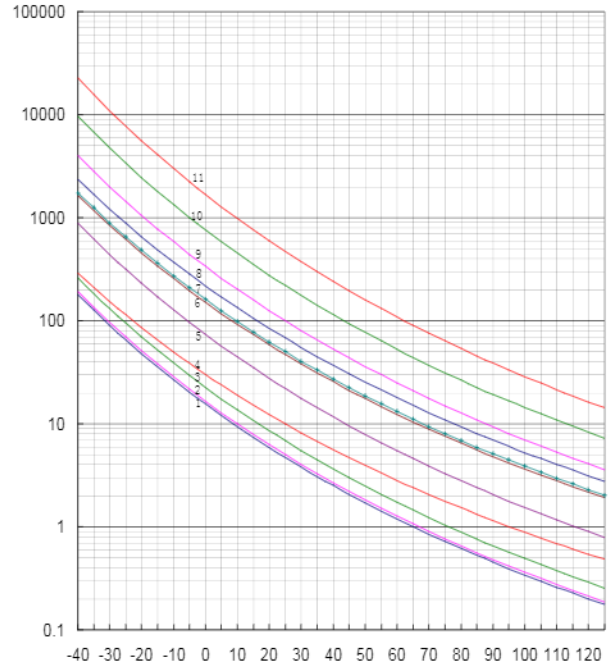


- 11. C474-4150
- 10. C224-4050
- 9. C104-3950
- 8. C683-3800
- 7. C503-3800
- 6. C473-3800
- 5. C223-3950
- 4. C103-3600
- 3. C682-3900
- 2. C502-3900
- 1. C472-3900



## 6. 可靠性试验项目 Reliability Testing Items

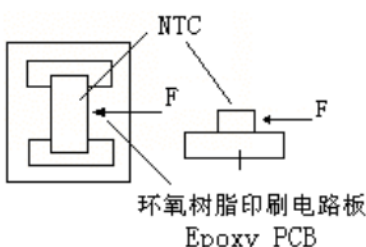序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks															
1	工作温度范围 Operating Temperature Range	-40℃~+120℃																
2	可焊 Solder ability	至少 95%端电极表面被焊锡覆盖。 At least 95% of terminal electrode should be covered with solder	预热温度:100℃~150℃ 预热时间:1~2Min. 焊锡温度: 245±5℃ 浸锡时间: 5±0.5s Preheating Temp. :100℃~150℃ Preheating Time: 1~2min. Soldering Temp. : 245±5℃ Immersion Time: 5±0.5s															
3	耐焊接热 Resistance to Soldering	至少 90%的焊锡覆盖在端电极表面, 无可见机械损伤。 R <sub>25</sub> 变化率小于±5% B值(B <sub>25/50</sub> )变化率小于±2% At least 90% of terminal electrode should be covered with solder. No mechanical damage. R <sub>25</sub> change shall be less than±5%; B-constant(B <sub>25/50</sub> )change shall be less than ±2%.	预热温度:100℃~150℃ 预热时间:1~2Min. 焊锡温度: 260±5℃ 浸锡时间: 10±0.5s Preheating Temp. : 100℃~150℃ Preheating Time:1~2min. Soldering Temp. : 260±5℃ Immersion Time: 10±1s															
4	端电极强度 External Electrode Strength	瓷体及端头均不受破坏 Ceramic and termination shall not be damaged.	 <p>环氧树脂印刷电路板 Epoxy PCB</p> <table border="1"> <thead> <tr> <th>类型 Type</th> <th>推力(N) Force (N)</th> <th>时间(s) Time (s)</th> </tr> </thead> <tbody> <tr> <td>0402</td> <td>5</td> <td>5±1</td> </tr> <tr> <td>0603</td> <td>5</td> <td>5±1</td> </tr> <tr> <td>0805</td> <td>10</td> <td>5±1</td> </tr> <tr> <td>1206</td> <td>10</td> <td>5±1</td> </tr> </tbody> </table>	类型 Type	推力(N) Force (N)	时间(s) Time (s)	0402	5	5±1	0603	5	5±1	0805	10	5±1	1206	10	5±1
类型 Type	推力(N) Force (N)	时间(s) Time (s)																
0402	5	5±1																
0603	5	5±1																
0805	10	5±1																
1206	10	5±1																

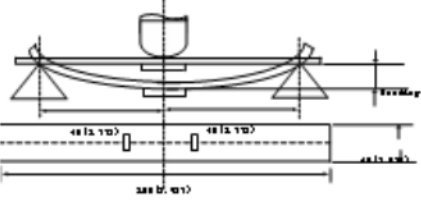

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks						
5	振动 Vibration	无可见机械损伤; $R_{25}$ 变化率小于 $\pm 5\%$ ; $B$ 值 ( $B_{25/50}$ ) 变化率小于 $\pm 2\%$ . Novisible mechanical damage ; $R_{25}$ change shall be less than $\pm 5\%$ ; $B$ -constant( $B_{25/50}$ )change shall be less than $\pm 2\%$ .	振动频率范围: 10Hz~55Hz~10Hz 全振幅: 1.52mm 时间: X\Y\Z 轴各 2hrs Frequency: 10Hz~55Hz~10Hz Amplitude: 1.52mm Time: Vibrated for a period of 2hrs, in three directions perpendicularly intersecting each other.						
6	抗弯强度 Resistance to flexure	无可见机械损伤; $R_{25}$ 变化率小于 $\pm 5\%$ ; $B$ 值 ( $B_{25/50}$ ) 变化率小于 $\pm 2\%$ . No visible mechanical damage; $R_{25}$ change shall be less than $\pm 5\%$ ; $B$ -constant( $B_{25/50}$ )change shall be less than $\pm 2\%$ .	 <table border="1" data-bbox="1005 929 1412 1064"> <thead> <tr> <th>规格 Size code</th> <th>弯曲度 h (mm) Camber (mm)</th> </tr> </thead> <tbody> <tr> <td>0402、0603</td> <td>0.7</td> </tr> <tr> <td>0805、1206</td> <td>1.0</td> </tr> </tbody> </table> <p>条件: 测试基板 (PCB) 施压速度: 0.5mm/s            Condition: print circuit board.            Pressing speed: 0.5 mm/s</p>	规格 Size code	弯曲度 h (mm) Camber (mm)	0402、0603	0.7	0805、1206	1.0
规格 Size code	弯曲度 h (mm) Camber (mm)								
0402、0603	0.7								
0805、1206	1.0								
7	跌落 Drop	无可见机械损伤; $R_{25}$ 变化率小于 $\pm 5\%$ ; $B$ 值 ( $B_{25/50}$ ) 变化率小于 $\pm 2\%$ . No visible mechanical damage; $R_{25}$ change shall be less than $\pm 5\%$ ; $B$ -constant( $B_{25/50}$ )change shall be less than $\pm 2\%$ .	从高度为 1 米的空中自由落到混凝土地板, 重复 10 次 Drop 10 times on a concrete floor from a high of 1m.						
8	耐高温 Resistance to High Temperature	外观无可见损伤; $R_{25}$ 变化率小于 $\pm 5\%$ ; $B$ 值 ( $B_{25/50}$ ) 变化率小于 $\pm 2\%$ . No visible damage ; $R_{25}$ change shall be less than $\pm 5\%$ ; $B$ -constant( $B_{25/50}$ )change shall be less than $\pm 2\%$ .	温度: $125 \pm 2^\circ\text{C}$ (无负荷) 试验时间: $500 \pm 2$ hrs Temp. : $125 \pm 2^\circ\text{C}$ (No Load) Time : $500 \pm 2$ hrs						




序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks															
9	耐低温 Resistance to High Temperature	外观无可见机械损伤; R <sub>25</sub> 变化率小于±5% B 值 (B <sub>25/50</sub> ) 变化率小于±2% No visible mechanical damage; R <sub>25</sub> change shall be less than±5%; B-constant(B <sub>25/50</sub> )change shall be less than ±2%.	在-40±2℃的条件下放置 500±2hrs Temp. : -40±2℃ Time : 500±2hrs															
10	恒定湿热 Static Humidity	外观无可见机械损伤; R <sub>25</sub> 变化率小于±5%; B 值 (B <sub>25/50</sub> ) 变化率小于±2%. No visible mechanical damage; R <sub>25</sub> change shall be less than±5%; B-constant(B <sub>25/50</sub> )change shall be less than ±2%.	在下列条件下放置 500±2hrs 温度: 55±2℃ 湿度: 90~95%RH Temp. : 55±2℃ Humidity : 90~95%RH Time : 500±2hrs															
11	温度循环 Temperature cycling	外观无可见损伤; R <sub>25</sub> 变化率小于±5%; B 值 (B <sub>25/50</sub> ) 变化率小于±2% No visible damage ; R <sub>25</sub> change shall be less than ±5%; B-constant(B <sub>25/50</sub> )change shall be less than ±2%.	无负荷, 在下列条件循环 32 次 cycles without load <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>阶段 Step</th> <th>温度 Temp.</th> <th>时间 Time (Min. )</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40℃</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>室温/Room Temp</td> <td>10±2</td> </tr> <tr> <td>3</td> <td>+125℃</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>室温/Room Temp</td> <td>10±2</td> </tr> </tbody> </table>	阶段 Step	温度 Temp.	时间 Time (Min. )	1	-40℃	30±3	2	室温/Room Temp	10±2	3	+125℃	30±3	4	室温/Room Temp	10±2
阶段 Step	温度 Temp.	时间 Time (Min. )																
1	-40℃	30±3																
2	室温/Room Temp	10±2																
3	+125℃	30±3																
4	室温/Room Temp	10±2																
<p>注: 以上要求测试电性能的项目, 应试验后在标准条件下放置 24 小时后测试。  <b>Note:When there are questions concerning, measurement shall be made after 24±2hrs of recovery under the standard condition.</b></p>																		






## 7. 产品包装 Packaging

### 7.1 编带图 Taping drawings

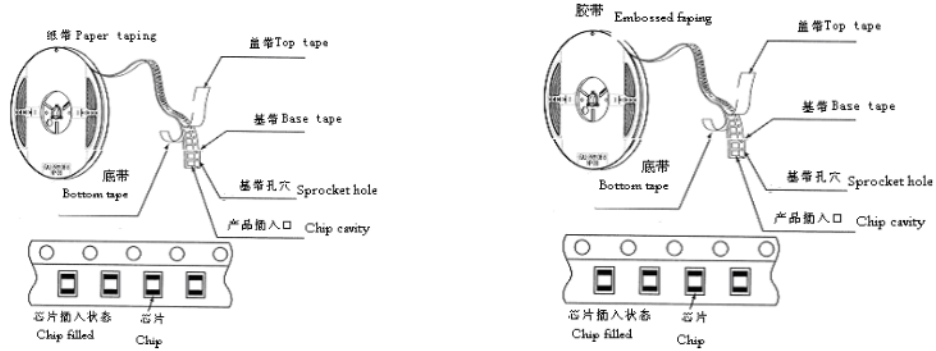


### 7.2 卷盘尺寸 Reel dimensions (Unit:mm)

	A	B	C	N	G
CF-8	178 ±2.0	22.0 ±2.0	12.5 ±1.5	57 ±2.0	8

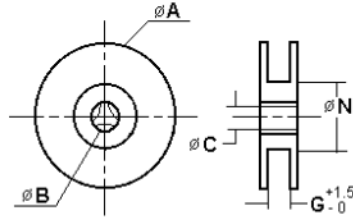


### 7.3 导带及空格部分 Leader and blank portion

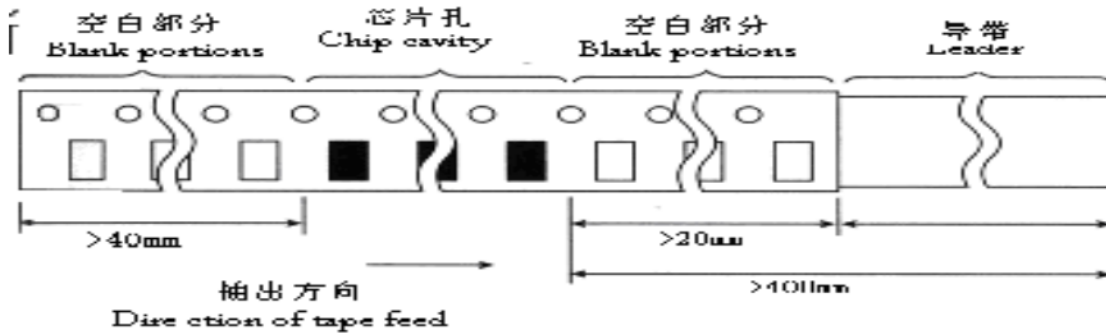

### 7.4 编带尺寸 Taping dimensions (Unit: mm)


#### 纸带 Paper tape

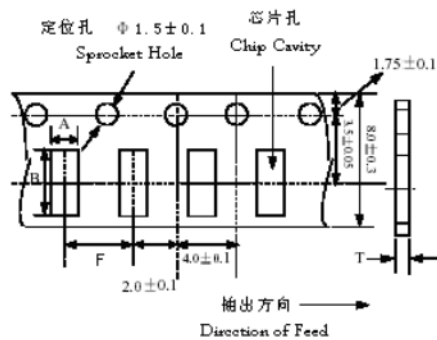

Part NO.	A	B	F	T
0402	0.65±0.1	1.15±0.1	2.0±0.05	0.8max
0603	1.1±0.2	1.9±0.2	4.0±0.2	1.1max
0805	1.5±0.2	2.3±0.2	4.0±0.2	1.1max
1206	1.9±0.2	3.5±0.2	4.0±0.2	1.1max



### 7.5 剥离力检验 Peeling off force

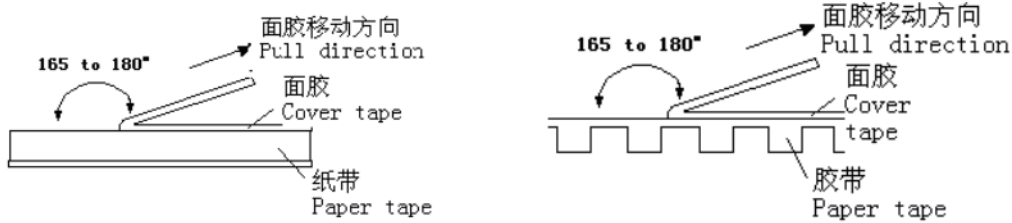

(1) 盖带的剥离力：沿面胶移动方向拉时要求剥离力为 0.1N~0.7N。

Peeling force should be 0.1~0.7N pulling in the direction of arrow.

(2) 剥离速度：300mm/min

Speed of peeling off: 300mm/min.

(3) 在胶带、纸带剥落时，面胶不能有破损，不能粘纸带。

The cover bond should not be damaged and bond the tape when it peeled off.

### 7.6 包装数量（单位：粒）Packaging number (Unit: Pcs)

类型 SIZE	1206	0805	0603	0402
每卷数量 REEL	4000	4000	4000	10000
每盒数量 BOX	40000	40000	40000	100000
每箱数量 CASE	240000	240000	240000	600000

### 7.7 标签粘贴位置 Label stick station



## 8. 环保情况说明 Environmental Protection Statement

**RoHS 指令：** 公司产品符合 RoHS 指令。

Response to RoHS directive: Our products are RoHS compliance.

## 9. 推荐焊接条件 Recommend Soldering Conditions

### 9.1 焊接条件 Soldering Conditions

产品适用于波峰焊和回流焊 Products can be applied to reflow and flow soldering.

#### ① 焊接要求 Soldering conditions

- 预热时，产品表温与焊料温度的温差最大不允许超出 150℃，焊接完冷却时，产品表温与溶剂温度之间的温差最大不超过 100℃。预热不足有可能引发产品表面裂纹，从而导致产品品质下降。

Pre-heating should be in such a way that the temperature difference between solder and ferrite surface






is limited to 150°C max. Also cooling into solvent after soldering should be in such way that the temperature difference is limited to 100°C max. Un-enough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.


- 产品要在以下画出的曲线允许的范围进行焊接。其它焊接条件可能引起产品电极的腐蚀。当焊接重复时，允许的时间为第一次做的累计时间。

Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode. When soldering is repeated, allowable time is the accumulated time.

### 9.2 回流焊曲线 Reflow soldering profile

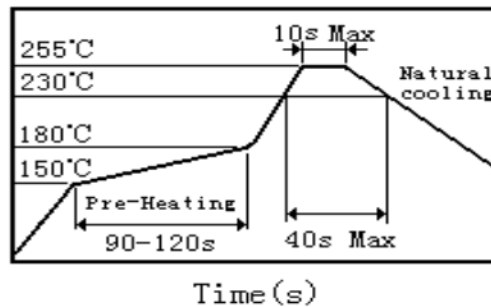

### 9.3 波峰焊曲线 Flow soldering profile

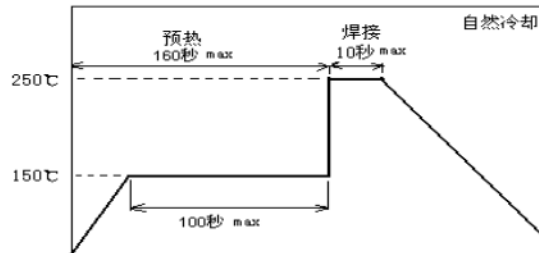


### 9.4 手工焊接 Iron soldering

烙铁温度：350°C Perform soldering at 350°C on 30W max

功率：最大为 30W Time: < 5S

烙铁停留时间：< 5S

注意：烙铁头不得与瓷体直接接触 Caution: Do not allow the iron-tip to directly touch the ceramic body.



### 9.5 清洗条件 Cleaning Conditions

清洗温度：60°C（最高） Cleaning temperature : 60°C max

清洗时间：1 分钟（最少） Cleaning time: 1 minute min.

超声波功率：最大为 200W Ultrasonic output power: 200W max



## 10. 存储要求 Storage Requirements

### 10.1 存储期限 Storage period

距电感公司出厂检验时间 6 个月内，产品可以使用检验时间可以通过包装外侧标记的检验号确认。若时间超过 6 个月，应检查焊接性能后方可使用。

Products which inspected in INDUCTOR COMPANY over 6 months ago should be examined and used, which can be Confirmed with inspection No. marked on the container. Solder ability should be checked if this period is exceeded.

### 10.2 存储条件 Storage conditions

- (1) 存放货物的库房应满足以下条件：温度：-10 ~ +40℃，相对湿度：30 ~ 70%。

Products should be storage in the warehouse on the following conditions:

Temperature : -10~+40℃ Humidity: 30~70% relative humidity

- (2) 禁止将产品保管在腐蚀性物质中，如硫磺、氯气或酸，否则将引起端头氧化，导致降低焊接性。

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid , or it may case oxidization of Electrodes resulting in poor solder ability.

- (3) 为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

- (4) 产品保管在库房中，应避免热冲击、振动以及直接光照等等。

Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

- (5) 产品应密封包装。

Products should be stored under the airtight packaged condition.

## 11. 使用注意事项 Precautions For Use

### 操作注意事项 Operating Considerations

本产品的陶瓷元件为易碎材料制成，使用时务必小心不要施加过大压力或引起冲击。此类强力可能会造成产品破裂或破碎。

The ceramic of this product is fragile, and care mustbe taken not to load an excessive press - force orto give a shock at handling.Such forces may cause cracking or chipping.

### PC 板的设计 PCB design

- (1) 当片式 NTCR 被安装在 PC 板上后，所使用的焊料的量（焊盘的大小）会直接影响到片式 NTCR 的性能，因此在设计基板时，必须慎重考虑焊盘的大小和配置，这些对组成基板的焊料的量有着决定的作用，过量的焊料会影响到芯片耐机械应力的能力。

When chip thermistors are mounted on a PCB, the amount of solder used(size of fillet) can directly affect thermistor performance Therefore, when design land- patterns it is necessary to consider the appropriate size and configuration of the solder pads, which determines the amount of solder necessary to form the fillets. Excess solder can affect the ability of chips to withstand mechanical stress.

- (2) 基板配置：将片式 NTCR 安装在板上之后，芯片将承受在下一加工过程中产生的机械应力，出于这个原因，在设计焊盘和片式 NTCR 的位置时，应注意考虑将应力减少到最低点。

Pattern configurations: After chip thermistor have been mounted on the board, chips can be subject to mechanical stresses in subsequent manufacturing process , for this reason, planning pattern configurations and the position of SMD thermistors should be carefully performed to minimize stress.



自动安装应考虑到的问题 Considerations for automatic placement.

- (1) 在将片式 NTCR 安装在 PC 板上时，不能让其承受过量的冲击力。

Excessive impact load should not be imposed on the thermistor when mounting on the PCB .

- (2) 应定期对安装机器进行维护和检查。

The maintenance and inspection of the mounting devices should be conducted periodically .

(3) 当 PC 板沿着接缝孔切割开时，片式 NTCR 所受机械应力的的大小因使用的方法不同而不同。以下方法按应力从小到大进行排列：推板、割裂、V 形凹槽、接缝孔。因此。任何理想的片式 NTCR 的布局必须考虑到 PC 板的分割方法。

When beating PCB along their perforations, the amount of mechanical stress on the thermistor can vary according to the method used .The following methods are listed in order from least stressful to most stressful: push-back, slit, v-grooving, and perforation. Thus, any ideal SMD thermistor layout must also consider the PCB splitting procedure.

焊膏的印刷 printing solder paste

- (1) 焊膏的印刷厚度建议在  $150\ \mu\text{m}$ ~ $200\ \mu\text{m}$ 。

Recommendable thickness of solder paste printing should from  $150\ \mu\text{m}$  to  $200\ \mu\text{m}$ .

- (2) 焊接后，爬锡高度为 0.2mm 至本产品的厚度。

After soldering, the solder fillet shall be a height from 0.2mm to the thickness of chip thermistor.

- (3) 过多的焊料将给本产品过大的机械应力，这些应力将导致断裂或机械损伤，也可能破坏产品的电性能。

Too much solder gives too strong mechanical stress to chip thermistor, such stress may cause cracking or any mechanical damage. And also, it can destroy the electrical performance of this product.

粘合剂作用和处理 Adhesive Application and curing

- (1) 在流体焊过程中，如果黏性不好或粘合剂不够坚硬，可能会导致产品和底板松散连接。

If insufficient adhesive is applied or if the adhesive is not sufficiently hardened this product may have a loose contact with the land, during flow soldering.

- (2) 黏胶的黏性太低将导致焊接后产品在板上滑动。

Too low viscosity of adhesive causes chip thermistor to slip on board, after mounting.

## 12. 注意事项 Notes

- (1) 若本次承认的为“整体无铅”产品，则表明该产品符合RoHS指令的要求。

If the parcel label on product is "Unitary lead free" that indicate the products in accord with ROHS appointed requests.

- (2) 本承认书保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵司产品上时请保证贵司的产品已根据贵司的规范进行了有效评价和确认。

This product specification guarantees the quality of our product as a single unit, Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.

- (3) 如果贵司对我司产品的试用已超过了本测试规范所界定的产品功能，对于此所引发的失效我司将不予保证。

We can't warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [NTC \(Negative Temperature Coefficient\) Thermistors](#) *category:*

*Click to view products by* [Fenghua Advanced](#) *manufacturer:*

Other Similar products are found below :

[118-253FAJ-P01](#) [121-202EAC-P01](#) [123-802EAJ-P01](#) [128-105NDP-Q02](#) [B57234S330M](#) [NTCLE410E3103F](#) [199-303KAF-A02](#) [30054-4](#)  
[M09N038F](#) [B57401V2103H062](#) [500-52AA04-101](#) [526-31AA19-104](#) [526-31AN12-202](#) [103AT-5-1P-FT](#) [10K3A542I](#) [111-802EAJ-901](#) [112-](#)  
[103FAG-H02](#) [112-104KAG-B01](#) [111-182CAG-H01](#) [112-103FAF-H01](#) [112-104KBF-F01](#) [526-31AA79-102](#) [B57621C5472J62](#) [44015RC](#)  
[194303KEVA01](#) [B57359V2224J260](#) [B57621C5472K062](#) [135-105QAF-J02](#) [B57230V2103H260](#) [NTCS0603E3333FHT](#) [118-802EAJ-P01](#)  
[121-103FAC-Q02](#) [521-53AW02-104](#) [CL109R4120](#) [GA100K6D234](#) [USUR1000-502G-06](#) [GA10K3MR1I](#) [USUR1000-203G-06](#)  
[NTCS0603E3333HHT](#) [B57861S0303F045](#) [GA1K7CG3](#) [NXFT15WB473FEAB030](#) [GA10K3A542I](#) [NTCLE213E3103JHT1](#) [A1504AS26P2A](#)  
[PANR103338-490](#) [NTCALUG02A502FA](#) [JSNA104F425FABXG](#) [JSNA103F345FABXG](#) [JSNA473F405FABXG](#)