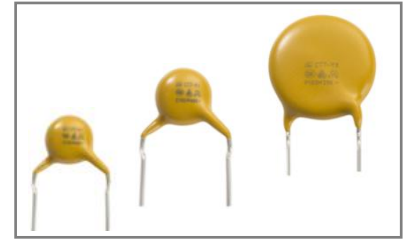


CT7 系列安规瓷介电容器--常规品
CT7 Alternating Current Disk Ceramic Capacitor
(Conventional Product)

◆特征
Feature

- * 符合 GB/T 6346.14-2015/IEC 60384.14-2005 认证标准。
Comply with GB/T 6346.14-2015/IEC 60384.14-2005 .
- * 绝缘性能好、耐压保险系数大，能承受较大脉冲电压冲击。
Good insulation performance, high voltage safety factor, can withstand larger pulse voltage shocks.

◆应用
Application

- * 适于在电子设备中作为跨电源线连接、天线耦合、旁路、滤波等。
It is suitable for cross power line connection, antenna coupling, by-pass, filter and so on in electronic equipment

◆型号表示法
Part Number

编码 Coding	CT7-	Y	12	Y5U	0	E	472	M	T	E	A	02
段数 Segment number	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
											厂商内部代码 Manufacturer's internal code	


(1) 产品类型 Product Type

代码	产品类型
CT7-	安规瓷介电容器--常规品 Alternating Current Disk Ceramic Capacitor (Conventional Product)

(2) 额定电压及代码 Rated Voltage and the code

代码 code	X	B	Y	C
电压 Voltage	250VAC	300VAC	400VAC	500VAC

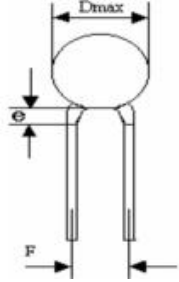

(3) 直径代码 Diameter Code

代码 code	4	5	6	7	8	9
成品尺寸 Finished dimension	7.0max	8.0max	9.0max	10.0max	11.0max	12.0max
代码 code	10	11	12	13	14	15
成品尺寸 Finished dimension	13.0max	14.0max	15.0max	16.0max	17.0max	18.0max

(4) 温度特性 T.C. Temperature Characteristics

材质代码 Material Code		温度特性 Temperature Characteristics (温度范围 Temperature range)	容量允许偏差 Capacity tolerance	工作温度范围 Operating temperature range
Used code	EIA code			
Y5P	Y5P	-25℃~+85℃	±10%	-40℃~+125℃
Y5U	Y5U		+22 / -56%	
Y5V	Y5V		+22 / -82%	

(5) 引线形式 Lead style

代码 code	脚型 Foot type	图示 Pictorial Representation	代码 code	脚型 Foot type	图示 Pictorial Representation
1	直脚 (长脚) Straight (Long legs)		0	前后打翘 Vertical	
3	直脚 (短脚) Straight (Short feet)				
4	直脚 (编带) Straight (Taping)				

(6) 引线间距 Lead spacing

代码 code	D	E
脚距 (mm) Lead spacing (mm)	7.5±0.5	10.0±0.5

(7) 标称容量 (额定容量) Rated capacitance

代码 Code	容量 Capacitance	注：标称容量以 pF 为单位，用 3 位数字表示。前两位数字表示有效数字，第三位为 0 的个数；R 表示小数点。 Note: The unit of standard capacitance if consisting of 3 digits, 1st two digits stand for effective value of the Standard capacitance ; third digit indicates the number of zeros; R indicates decimal.
4R7	4.7pF	
330	33pF	
103	10000pF	

(8) 允许偏 Capacitance Tolerance

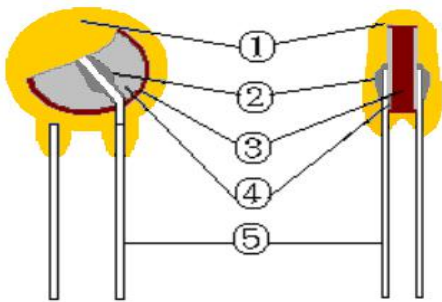
代码 code	K	M	S	Z
容差 Tolerance	±10%	±20%	+50/-20%	+80%/-20%

(9) 包装形式 Packing style

代码 code	S	T
包装形式 Packing style	散包装 Bulking	编带包装 Taping

(10) 环氧树脂封装料颜色 Epoxy color

代码 code	E	F
环氧树脂 Epoxy	黄色 Yellow	蓝色 Blue

*** (11) 车规代码 Automotive Grade Code**
◆ 产品结构
Product Structure


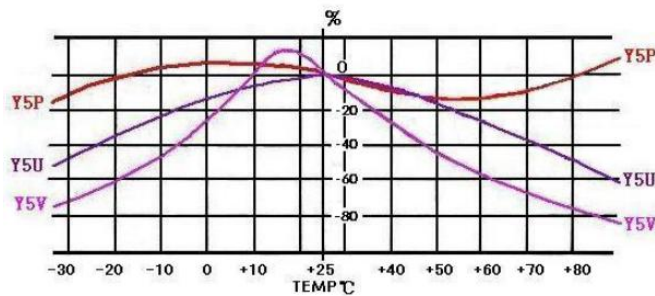
- | |
|-----------------------------------------------------------|
| ①封装层：环氧树脂
Encapsulation layer: Envelope: epoxy |
| ②焊接点：无铅焊锡
Solder Joint: Solder Joint: lead-free solder |
| ③电极：银/铜
Electrode: Ag / Cu |
| ④瓷体：陶瓷介质
Ceramic body: ceramic medium |
| ⑤引线：铜线
Electronic lead: Copper Wire |

◆容值范围
Capacity Range

额定电压 Rated Voltage	Y5P	Y5U	Y5V
Y1: 400VAC/500VAC	100~1000pF	470~4700pF	1000~10000pF
Y2: 250VAC/300VAC	100~1000pF	470~4700pF	1000~10000pF

◆参数要求及测试条件
Parameter Requirements And Test Conditions

序号 Number	项目 Item	性能要求 Performance requirement	检测方法 Test method		
1	静电容量 Capacitance	在規定允許公差之內 Within the specified Tolerance	测试频率和测试电压 Measuring frequency & Measuring voltage: 1±0.1KHz, 1.0Vrms		
2	损耗角正切值 Loss angle Tangent value	Y5P: $Tg\delta \leq 0.025$ Y5U: $Tg\delta \leq 0.030$ Y5V: $Tg\delta \leq 0.035$	测试环境温度 Measuring temperature: 25±2°C		
3	绝缘电阻 Insulation resistance	$IR \geq 10000M\Omega$	测试电压 Test voltage: 500VDC 施加时间 Application time: 60±5S		
4	端子间耐电压 Resistance between terminal voltage	无击穿 No breakdown	产品类型 Product Type	测试电压 Test Voltage	充放电电流 Charge/ discharge current : <50mA
			Y1-400VAC/500VAC UR: Y2-250VAC/300VAC UR:	10 UR	

◆产品特性曲线图
Product Characteristic Curve


◆包装
Packaging

散包装 Bulking		编带 Taping	
最小包装产品数量 Minimum number of packaged products	整箱包装数量 Quantity packed in whole case	最小包装产品数量 Minimum number of packaged products	整箱包装数量 Quantity packed in whole case
0.5Kpcs	30.0~60.0Kpcs	1.0Kpcs	10.0Kpcs

◆产品的储存
Product 's Storage

- * 产品储存场地要整洁、干燥、通风、无漏水、无污染。
Product storage site to clean, dry and ventilated, no leakage, no pollution.
- * 产品长时间储存时不易直接放在地面，要放在托架上进行防潮。
Products seldom directly on the ground, when stored for a long time to put on the bracket to moisture proof.
- * 注意按包装箱上的堆放高度对产品进行堆放。
Note based on the stacking height of packing products to pile up.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Safety Capacitors](#) category:

Click to view products by [Fenghua Advanced](#) manufacturer:

Other Similar products are found below :

[B32022B3223K026](#) [B32912A3104K026](#) [B81123C1102M003](#) [MKPY2-.02230020P15](#) [46KN333000M1M](#) [46KN422000P0M](#)
[46KR422000M1K](#) [MP1125KRE6RLC](#) [MP2683KGC2XLC](#) [MP2124KGC3XLC](#) [MP2684KGD4XLC](#) [MP2474KGE1XLC](#) [46KF268000M1M](#)
[46KI3150NDM2M](#) [PHE840MD6220MD13R30](#) [PHE840MY6470MD14R06](#) [PHE845VD5470MR06](#) [R463N4100ZAM1K](#) [MKPX2R-](#)
[1/400/10P27](#) [YP500101K040B20C2P](#) [YU0AH222M090DAMD0B](#) [LS1808N102K302NX080TM](#) [CY1471KE1IEB46X2A2](#)
[CY1222ME5IEE48O2A2](#) [MPX474K31DTEV158G0](#) [Y2560K-D1I-B4-AC250V](#) [HMF222MG3BW](#) [CY1471ME19EE45W2A2](#)
[MPX104K31D2KN158HF](#) [MPX224K31D2KN158G0](#) [PX104K2W1502](#) [MP2224K32C5J6LC](#) [H102M050FQ55250L750A](#)
[MP2474K32D6R8LC](#) [MP2224K32C3J6LC](#) [MP2104K32C3J6LC](#) [PX334K2C1006](#) [YU0AC222M080L20C7B](#) [MP2473K27B2X6LC](#)
[MP2224K32D4J8LC](#) [MP2684K32D6T8LC](#) [ST3Y1Y5U332M500VAC](#) [ST3Y1Y5V472M500VAC](#) [MP2474K32D4X8LC](#)
[MP2474K32D4J8LC](#) [YU0AH332M110L4EB0B](#) [CY1681ME1IEE45S2A2](#) [Y1220J-E1I-B4-AC400V](#) [Y1120K-E1I-B4-AC400V](#)
[MP2154K32D2R8LC](#)