

**HA 系列功率电感器**  
**HA Series SMD Power Inductor**


◆ **工作温度**  
**Operation Temperature**  
 -40℃~125℃

◆ **特征**  
**Feature**

- \* 超大电流  
 Super saturation current
- \* 磁屏蔽结构  
 Magnetic shielding structure
- \* 适合表面贴装  
 Suitable for surface mounting


◆ **应用**  
**Application**

- \* 便携式通信设备, 笔记本电脑  
 Portable communication equipment, Notebook
- \* DC/DC 转换  
 DC/DC conversion
- \* 直流电源开关电源电路  
 DC switching power supply circuit

◆ **规格型号表示方法**  
**Part Number**

|                      |   |   |                  |                        |   |   |    |
|----------------------|---|---|------------------|------------------------|---|---|----|
| HA                   | 0630  | -   | R10              | M                      | T   | A   | 00 |
| 产品代号<br>Product Code | 尺寸(长×高)<br>Dimension<br>(Length × Thickness)        | 电感性<br>Inductance                                   | 公差<br>Tolerance  | 包装代号<br>Packaging code | 材质代码<br>Material code                                   | 标准代码<br>Standard code   |    |
| HA                   | 0420→4.9×2.0mm<br>0630→7.6×3.2mm<br>1250→14.5×5.2mm | R10→0.1 uH<br>1R0→1.0 uH<br>100→10 uH<br>101→100 uH | M→±20%<br>N→±30% | T→卷带盘装<br>Tape & Reel  | A→合金粉<br>Alloy powder<br>H→羰基铁粉<br>Carbonyl iron powder | 00→标准品<br>Standard products<br>01~09→定制品<br>Customized products |    |


◆ **产品结构**  
**Product Structure**

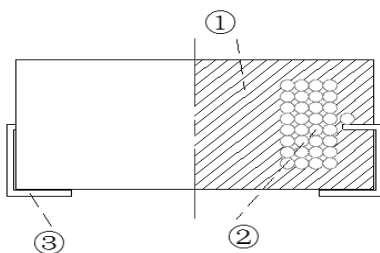

| No. | 部位<br>Component | 材料<br>Material             |
|-----|-----------------|----------------------------|
| ①   | 磁芯 Core         | 金属材料 Metallic materials    |
| ②   | 线圈 Winding      | 漆包线 Enamelled wire H class |
| ③   | 电极片 Base        | 镀锡铜片<br>Phosphor bronze    |

**◆规格尺寸**

Dimension

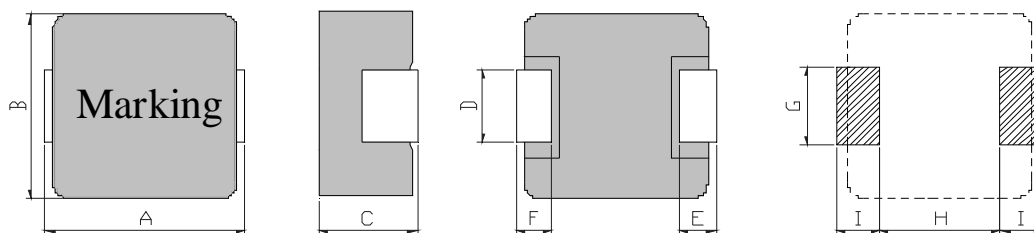
 RECOMMENDED  
 LAND PATTERNS

单位(Unit): mm

| 型号<br>Part | A       | B       | C      | D        | E       | F       | G<br>(Typ.) | H<br>(Typ.) | I<br>(Typ.) |
|------------|---------|---------|--------|----------|---------|---------|-------------|-------------|-------------|
| 0420       | 4.90MAX | 4.40MAX | 2.0MAX | 1.5±0.3  | 1.0±0.3 | 1.0±0.3 | 2.5         | 1.75        | 1.5         |
| 0520       | 5.90MAX | 5.30MAX | 2.2MAX | 2.0±0.3  | 1.2±0.3 | 1.2±0.3 | 2.5         | 2.0         | 1.9         |
| 0530       | 5.90MAX | 5.30MAX | 3.2MAX | 2.0±0.3  | 1.2±0.3 | 1.2±0.3 | 2.5         | 2.0         | 1.9         |
| 0630       | 7.6MAX  | 7.0MAX  | 3.2MAX | 3.0±0.3  | 1.6±0.3 | 1.6±0.3 | 3.5         | 3.6         | 2.4         |
| 0650       | 7.6MAX  | 7.0MAX  | 5.2MAX | 3.0±0.3  | 1.6±0.3 | 1.6±0.3 | 3.5         | 3.6         | 2.4         |
| 1040       | 11.5MAX | 10.5MAX | 4.2MAX | 3.0±0.5  | 2.0±0.5 | 2.0±0.5 | 4.0         | 5.5         | 3.5         |
| 1050       | 11.5MAX | 10.5MAX | 5.2MAX | 3.0±0.5  | 2.0±0.5 | 2.0±0.5 | 4.0         | 5.5         | 3.5         |
| 1250       | 14.5MAX | 13.5MAX | 5.2MAX | 3.5±0.5  | 2.5±0.5 | 2.5±0.5 | 5.0         | 8.0         | 3.25        |
| 1265       | 14.5MAX | 13.5MAX | 6.5MAX | 3.5±0.5  | 2.5±0.5 | 2.5±0.5 | 5.0         | 8.0         | 3.25        |
| 1770       | 18.5MAX | 17.5MAX | 7.0MAX | 11.8±0.3 | 3.3±0.5 | 3.3±0.5 | 13.0        | 11.2        | 4.15        |

**◆电性能参数**

Electrical Characteristics

\* HA0420 Type

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA0420-R22MTA10  | 0.22                            | ±20%            | 100KHz             | 8.0   | 12.00                                  | 9.00   |
| HA0420-R33MTA10  | 0.33                            | ±20%            | 100KHz             | 12.0  | 9.45                                   | 7.20   |
| HA0420-R47MTA10  | 0.47                            | ±20%            | 100KHz             | 14.0  | 9.00                                   | 5.50   |
| HA0420-R56MTA10  | 0.56                            | ±20%            | 100KHz             | 18.0  | 8.00                                   | 5.00   |
| HA0420-R68MTA10  | 0.68                            | ±20%            | 100KHz             | 21.0  | 8.00                                   | 5.00   |
| HA0420-1R0MTA10  | 1.00                            | ±20%            | 100KHz             | 27.0  | 6.30                                   | 4.10   |
| HA0420-1R5MTA10  | 1.50                            | ±20%            | 100KHz             | 36.0  | 5.40                                   | 3.60   |
| HA0420-2R2MTA10  | 2.20                            | ±20%            | 100KHz             | 58.0  | 5.00                                   | 3.00   |
| HA0420-3R3MTA10  | 3.30                            | ±20%            | 100KHz             | 90.0  | 3.00                                   | 2.00   |
| HA0420-4R7MTA10  | 4.70                            | ±20%            | 100KHz             | 150.0   | 3.00                                   | 2.00   |
| HA0420-6R8MTA10  | 6.80                            | ±20%            | 100KHz             | 170.0   | 2.50                                   | 2.00   |
| HA0420-100MTA10  | 10.00                           | ±20%            | 100KHz             | 230.0   | 2.00                                   | 1.50   |

**\* HA0520 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA0520-1R0MTA00  | 1.00                            | $\pm 20\%$      | 100KHz             | 20.0  | 7.50                                   | 7.00   |
| HA0520-1R5MTA00  | 1.50                            | $\pm 20\%$      | 100KHz             | 28.0  | 6.30                                   | 4.50   |
| HA0520-2R2MTA00  | 2.20                            | $\pm 20\%$      | 100KHz             | 45.0  | 5.40                                   | 3.60   |
| HA0520-3R3MTA00  | 3.30                            | $\pm 20\%$      | 100KHz             | 80.0  | 4.50                                   | 3.15   |
| HA0520-4R7MTA00  | 4.70                            | $\pm 20\%$      | 100KHz             | 90.0  | 3.15                                   | 2.70   |
| HA0520-100MTA00  | 10.00                           | $\pm 20\%$      | 100KHz             | 190.0   | 2.60                                   | 1.98   |

**\* HA0530 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA0530-R68MTA00  | 0.68                            | $\pm 20\%$      | 100KHz             | 12.0  | 11.00                                  | 9.00   |
| HA0530-1R0MTA00  | 1.00                            | $\pm 20\%$      | 100KHz             | 16.0  | 10.00                                  | 7.00   |
| HA0530-1R5MTA00  | 1.50                            | $\pm 20\%$      | 100KHz             | 22.0  | 9.00                                   | 5.00   |
| HA0530-2R2MTA00  | 2.20                            | $\pm 20\%$      | 100KHz             | 35.0  | 7.50                                   | 4.50   |
| HA0530-3R3MTA00  | 3.30                            | $\pm 20\%$      | 100KHz             | 38.0  | 7.00                                   | 4.00   |
| HA0530-4R7MTA00  | 4.70                            | $\pm 20\%$      | 100KHz             | 60.0  | 5.00                                   | 3.00   |
| HA0530-6R8MTA00  | 6.80                            | $\pm 20\%$      | 100KHz             | 90.0  | 3.20                                   | 2.30   |
| HA0530-100MTA00  | 10.00                           | $\pm 20\%$      | 100KHz             | 133.0   | 2.50                                   | 1.80   |
| HA0530-150MTA00  | 15.00                           | $\pm 20\%$      | 100KHz             | 190.0   | 2.30                                   | 1.50   |
| HA0530-220MTA00  | 22.00                           | $\pm 20\%$      | 100KHz             | 250.0   | 1.35                                   | 1.08   |

**\* HA0630 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA0630-R33MTA00  | 0.33                            | $\pm 20\%$      | 100KHz             | 4.0   | 25.00                                  | 21.00  |
| HA0630-R47MTA00  | 0.47                            | $\pm 20\%$      | 100KHz             | 5.3   | 20.00                                  | 15.00  |
| HA0630-R68MTA00  | 0.68                            | $\pm 20\%$      | 100KHz             | 6.0   | 17.00                                  | 14.00  |
| HA0630-1R0MTA00  | 1.00                            | $\pm 20\%$      | 100KHz             | 10.0  | 18.00                                  | 7.00   |
| HA0630-1R5MTA00  | 1.50                            | $\pm 20\%$      | 100KHz             | 15.0  | 13.00                                  | 7.50   |
| HA0630-2R2MTA00  | 2.20                            | $\pm 20\%$      | 100KHz             | 20.0  | 10.80                                  | 7.50   |
| HA0630-3R3MTA00  | 3.30                            | $\pm 20\%$      | 100KHz             | 30.0  | 10.00                                  | 6.00   |
| HA0630-4R7MTA00  | 4.70                            | $\pm 20\%$      | 100KHz             | 40.0  | 8.10                                   | 4.50   |
| HA0630-5R6MTA00  | 5.60                            | $\pm 20\%$      | 100KHz             | 45.0  | 7.00                                   | 4.20   |
| HA0630-6R8MTA00  | 6.80                            | $\pm 20\%$      | 100KHz             | 60.0  | 6.00                                   | 4.00   |
| HA0630-8R2MTA00  | 8.20                            | $\pm 20\%$      | 100KHz             | 70.0  | 5.40                                   | 3.60   |
| HA0630-100MTA00  | 10.00                           | $\pm 20\%$      | 100KHz             | 68.0  | 5.00                                   | 3.20   |
| HA0630-150MTA00  | 15.00                           | $\pm 20\%$      | 100KHz             | 130.0   | 4.00                                   | 3.00   |
| HA0630-220MTA00  | 22.00                           | $\pm 20\%$      | 100KHz             | 200.0   | 3.00                                   | 2.00   |
| HA0630-330MTA00  | 33.00                           | $\pm 20\%$      | 100KHz             | 240.0   | 2.50                                   | 2.00   |
| HA0630-470MTA00  | 47.00                           | $\pm 20\%$      | 100KHz             | 390.0   | 2.00                                   | 1.00   |

**\* HA0650 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 I <sub>rms</sub><br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA0650-1R0MTA00  | 1.00                            | $\pm 20\%$      | 100KHz             | 7.5   | 13.00                                  | 12.00  |
| HA0650-1R5MTA00  | 1.50                            | $\pm 20\%$      | 100KHz             | 11.0  | 12.50                                  | 11.00  |
| HA0650-2R2MTA00  | 2.20                            | $\pm 20\%$      | 100KHz             | 15.0  | 12.00                                  | 8.00   |
| HA0650-3R3MTA00  | 3.30                            | $\pm 20\%$      | 100KHz             | 20.0  | 9.00                                   | 7.00   |
| HA0650-4R7MTA00  | 4.70                            | $\pm 20\%$      | 100KHz             | 35.0  | 9.00                                   | 6.00   |
| HA0650-5R6MTA00  | 5.60                            | $\pm 20\%$      | 100KHz             | 45.0  | 8.50                                   | 5.50   |
| HA0650-6R8MTA00  | 6.80                            | $\pm 20\%$      | 100KHz             | 43.0  | 8.00                                   | 5.00   |
| HA0650-8R2MTA00  | 8.20                            | $\pm 20\%$      | 100KHz             | 45.0  | 6.00                                   | 5.00   |
| HA0650-100MTA00  | 10.00                           | $\pm 20\%$      | 100KHz             | 60.0  | 5.50                                   | 4.50   |
| HA0650-150MTA00  | 15.00                           | $\pm 20\%$      | 100KHz             | 85.0  | 5.00                                   | 3.50   |
| HA0650-220MTA00  | 22.00                           | $\pm 20\%$      | 100KHz             | 130.0   | 3.00                                   | 2.50   |
| HA0650-330MTA00  | 33.00                           | $\pm 20\%$      | 100KHz             | 160.0   | 2.50                                   | 2.00   |
| HA0650-470MTA00  | 47.00                           | $\pm 20\%$      | 100KHz             | 230.0   | 2.30                                   | 1.80   |
| HA0650-680MTA00  | 68.00                           | $\pm 20\%$      | 100KHz             | 400.0   | 2.00                                   | 1.50   |

**\* HA1040 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 I <sub>rms</sub><br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA1040-R22MTH00  | 0.22                            | $\pm 20\%$      | 100KHz             | 2.0   | 54.00                                  | 29.50  |
| HA1040-R47MTH00  | 0.47                            | $\pm 20\%$      | 100KHz             | 2.5   | 39.00                                  | 26.00  |
| HA1040-R82MTH00  | 0.82                            | $\pm 20\%$      | 100KHz             | 3.3   | 30.00                                  | 20.00  |
| HA1040-1R0MTH00  | 1.00                            | $\pm 20\%$      | 100KHz             | 5.0   | 28.00                                  | 18.00  |
| HA1040-1R5MTH00  | 1.50                            | $\pm 20\%$      | 100KHz             | 6.0   | 23.00                                  | 16.00  |
| HA1040-2R2MTH00  | 2.20                            | $\pm 20\%$      | 100KHz             | 9.0   | 18.00                                  | 12.00  |
| HA1040-3R3MTH00  | 3.30                            | $\pm 20\%$      | 100KHz             | 15.0  | 14.40                                  | 9.50   |
| HA1040-4R7MTH00  | 4.70                            | $\pm 20\%$      | 100KHz             | 16.5  | 14.00                                  | 8.50   |
| HA1040-5R6MTH00  | 5.60                            | $\pm 20\%$      | 100KHz             | 25.0  | 14.00                                  | 8.00   |
| HA1040-6R8MTH00  | 6.80                            | $\pm 20\%$      | 100KHz             | 28.0  | 12.00                                  | 7.00   |
| HA1040-8R2MTH00  | 8.20                            | $\pm 20\%$      | 100KHz             | 32.0  | 9.00                                   | 6.00   |
| HA1040-100MTH00  | 10.00                           | $\pm 20\%$      | 100KHz             | 35.0  | 7.70                                   | 4.50   |
| HA1040-150MTH00  | 15.00                           | $\pm 20\%$      | 100KHz             | 48.0  | 7.00                                   | 4.00   |
| HA1040-220MTH00  | 22.00                           | $\pm 20\%$      | 100KHz             | 66.0  | 5.50                                   | 3.50   |
| HA1040-330MTH00  | 33.00                           | $\pm 20\%$      | 100KHz             | 155.0   | 4.50                                   | 3.00   |
| HA1040-470MTH00  | 47.00                           | $\pm 20\%$      | 100KHz             | 190.0   | 4.00                                   | 2.50   |
| HA1040-680MTH00  | 68.00                           | $\pm 20\%$      | 100KHz             | 205.0   | 3.50                                   | 2.00   |
| HA1040-101MTH00  | 100.00                          | $\pm 20\%$      | 100KHz             | 300.0   | 2.70                                   | 0.90   |

**\* HA1050 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA1050-1R0MTH00  | 1.00                            | $\pm 20\%$      | 100KHz             | 4.0   | 27.00                                  | 15.00  |
| HA1050-1R5MTH00  | 1.50                            | $\pm 20\%$      | 100KHz             | 6.0   | 22.00                                  | 14.00  |
| HA1050-2R2MTH00  | 2.20                            | $\pm 20\%$      | 100KHz             | 8.5   | 21.50                                  | 12.00  |
| HA1050-3R3MTH00  | 3.30                            | $\pm 20\%$      | 100KHz             | 11.0  | 18.60                                  | 10.00  |
| HA1050-4R7MTH00  | 4.70                            | $\pm 20\%$      | 100KHz             | 17.0  | 14.00                                  | 9.00   |
| HA1050-5R6MTH00  | 5.60                            | $\pm 20\%$      | 100KHz             | 20.0  | 13.50                                  | 9.00   |
| HA1050-6R8MTH00  | 6.80                            | $\pm 20\%$      | 100KHz             | 25.0  | 12.60                                  | 9.00   |
| HA1050-8R2MTH00  | 8.20                            | $\pm 20\%$      | 100KHz             | 30.0  | 12.50                                  | 7.00   |
| HA1050-100MTH00  | 10.00                           | $\pm 20\%$      | 100KHz             | 38.0  | 10.00                                  | 6.00   |
| HA1050-150MTH00  | 15.00                           | $\pm 20\%$      | 100KHz             | 50.0  | 9.00                                   | 5.00   |
| HA1050-220MTH00  | 22.00                           | $\pm 20\%$      | 100KHz             | 60.0  | 7.00                                   | 4.50   |
| HA1050-330MTH00  | 33.00                           | $\pm 20\%$      | 100KHz             | 105.0   | 6.00                                   | 3.50   |
| HA1050-470MTH00  | 47.00                           | $\pm 20\%$      | 100KHz             | 145.0   | 4.00                                   | 3.00   |
| HA1050-680MTH00  | 68.00                           | $\pm 20\%$      | 100KHz             | 250.0   | 3.15                                   | 2.70   |
| HA1050-820MTH00  | 82.00                           | $\pm 20\%$      | 100KHz             | 300.0   | 3.00                                   | 2.00   |
| HA1050-101MTH00  | 100.00                          | $\pm 20\%$      | 100KHz             | 320.0   | 2.30                                   | 1.00   |

**\* HA1250 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA1250-R68MTH00  | 0.68                            | $\pm 20\%$      | 100KHz             | 2.3   | 41.00                                  | 20.00  |
| HA1250-R82MTH00  | 0.82                            | $\pm 20\%$      | 100KHz             | 3.0   | 39.00                                  | 19.00  |
| HA1250-1R0MTH00  | 1.00                            | $\pm 20\%$      | 100KHz             | 4.0   | 36.00                                  | 18.00  |
| HA1250-1R5MTH00  | 1.50                            | $\pm 20\%$      | 100KHz             | 4.1   | 27.00                                  | 18.00  |
| HA1250-2R2MTH00  | 2.20                            | $\pm 20\%$      | 100KHz             | 4.5   | 25.00                                  | 16.00  |
| HA1250-3R3MTH00  | 3.30                            | $\pm 20\%$      | 100KHz             | 10.0  | 23.00                                  | 15.00  |
| HA1250-4R7MTH00  | 4.70                            | $\pm 20\%$      | 100KHz             | 15.0  | 22.00                                  | 12.00  |
| HA1250-6R8MTH00  | 6.80                            | $\pm 20\%$      | 100KHz             | 20.0  | 19.00                                  | 11.00  |
| HA1250-8R2MTH00  | 8.20                            | $\pm 20\%$      | 100KHz             | 24.0  | 18.00                                  | 10.00  |
| HA1250-100MTH00  | 10.00                           | $\pm 20\%$      | 100KHz             | 26.0  | 14.00                                  | 6.00   |
| HA1250-150MTH00  | 15.00                           | $\pm 20\%$      | 100KHz             | 35.0  | 12.00                                  | 6.00   |
| HA1250-220MTH00  | 22.00                           | $\pm 20\%$      | 100KHz             | 55.0  | 8.00                                   | 4.00   |
| HA1250-330MTH00  | 33.00                           | $\pm 20\%$      | 100KHz             | 80.0  | 6.00                                   | 3.00   |
| HA1250-470MTH00  | 47.00                           | $\pm 20\%$      | 100KHz             | 110.0   | 5.00                                   | 2.50   |
| HA1250-560MTH00  | 56.00                           | $\pm 20\%$      | 100KHz             | 180.0   | 3.50                                   | 2.00   |
| HA1250-680MTH00  | 68.00                           | $\pm 20\%$      | 100KHz             | 210.0   | 3.50                                   | 1.50   |

**\* HA1265 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA1265-1R0MTH00  | 1.0                             | $\pm 20\%$      | 100KHz             | 3.0   | 49.00                                  | 25.00  |
| HA1265-1R5MTH00  | 1.5                             | $\pm 20\%$      | 100KHz             | 4.0   | 45.00                                  | 22.00  |
| HA1265-2R2MTH00  | 2.2                             | $\pm 20\%$      | 100KHz             | 4.5   | 40.00                                  | 18.00  |
| HA1265-3R3MTH00  | 3.3                             | $\pm 20\%$      | 100KHz             | 8.5   | 25.20                                  | 15.50  |
| HA1265-4R7MTH00  | 4.7                             | $\pm 20\%$      | 100KHz             | 14.0  | 22.50                                  | 14.00  |
| HA1265-5R6MTH00  | 5.6                             | $\pm 20\%$      | 100KHz             | 15.0  | 20.00                                  | 12.00  |
| HA1265-6R8MTH00  | 6.8                             | $\pm 20\%$      | 100KHz             | 18.0  | 18.00                                  | 12.00  |
| HA1265-8R2MTH00  | 8.2                             | $\pm 20\%$      | 100KHz             | 25.0  | 16.00                                  | 10.00  |
| HA1265-100MTH00  | 10.0                            | $\pm 20\%$      | 100KHz             | 25.0  | 15.00                                  | 10.00  |
| HA1265-220MTH00  | 22.0                            | $\pm 20\%$      | 100KHz             | 48.0  | 12.00                                  | 7.00   |
| HA1265-330MTH00  | 33.0                            | $\pm 20\%$      | 100KHz             | 66.0  | 6.50                                   | 4.00   |
| HA1265-470MTH00  | 47.0                            | $\pm 20\%$      | 100KHz             | 90.0  | 5.00                                   | 3.50   |
| HA1265-560MTH00  | 56.0                            | $\pm 20\%$      | 100KHz             | 110.0   | 4.00                                   | 3.00   |
| HA1265-680MTH00  | 68.0                            | $\pm 20\%$      | 100KHz             | 123.0   | 3.00                                   | 2.50   |
| HA1265-101MTH00  | 100.0                           | $\pm 20\%$      | 100KHz             | 180.0   | 3.00                                   | 2.50   |
| HA1265-121MTH00  | 120.0                           | $\pm 20\%$      | 100KHz             | 250.0   | 2.80                                   | 2.00   |
| HA1265-151MTH00  | 150.0                           | $\pm 20\%$      | 100KHz             | 280.0   | 2.50                                   | 1.60   |

**\* HA1770 Type**

| 规格型号<br>Part No. | 电感量<br>Inductance<br>( $\mu$ H) | 公差<br>Tolerance | 测试频率<br>Test Freq. | 直流电阻<br>Direct Current Resistance<br>DCR(m $\Omega$ ) Max | 饱和电流 Isat<br>Saturation Current<br>(A) | 温升电流 Irms<br>Temperature Rise<br>Current (A) |
|------------------|---------------------------------|-----------------|--------------------|---|--|--|
| HA1770-100MTA00  | 10.00                           | $\pm 20\%$      | 100KHz             | 15.0  | 16.00                                  | 11.00  |
| HA1770-150MTA00  | 15.00                           | $\pm 20\%$      | 100KHz             | 20.0  | 10.80                                  | 8.50   |
| HA1770-330MTA00  | 33.00                           | $\pm 20\%$      | 100KHz             | 37.0  | 11.00                                  | 7.50   |
| HA1770-470MTA00  | 47.00                           | $\pm 20\%$      | 100KHz             | 47.0  | 6.80                                   | 6.30   |
| HA1770-680MTA00  | 68.00                           | $\pm 20\%$      | 100KHz             | 80.0  | 4.05                                   | 3.60   |
| HA1770-820MTA00  | 82.00                           | $\pm 20\%$      | 100KHz             | 105.0   | 4.05                                   | 3.60   |
| HA1770-101MTA00  | 100.00                          | $\pm 20\%$      | 100KHz             | 120.0   | 3.15                                   | 2.70   |

备注：测试电压为 1V。

Remarks: The test voltage is 1V.

Isat: 指使电感量比初始值下降 30% 的电流值，加载电流的时间 1 秒以内。

The DC current at which the inductance drops 30% from its value without current, load current time within 1s.


Irms: 指使电感器表面温度上升 40℃ 的电流值。

The DC current that increases the surface temperature of the inductor by 40°C.


**◆可靠性测试方法**
**Reliability Test Method**

| 序号<br>No. | 项目<br>Items                          | 要求<br>Requirements  | 试验方法及备注<br>Test Methods and Remarks   |
|-----------|--------------------------------------|---|---|
| 1         | 绝缘电阻<br>Insulation Resistance        | $\geq 1M\Omega$   | 在电感器线圈和磁芯之间施加 30 V 直流电压保持 5s。<br>30 V DC between inductor coil and core for 5 seconds.  |
| 2         | 可焊性<br>Solderability                 | 电极面 95%以上覆盖新的焊料。<br>95% or more of electrode area shall be coated by new solder.                              | 在 $245\pm 5^{\circ}\text{C}$ 熔融的焊锡 (96.5Sn/3.0Ag/0.5Cu) 中浸 $5\pm 1\text{s}$ 。<br>Dip pads in flux and dip in solder pot (96.5Sn/3.0Ag/0.5Cu) at $245\pm 5^{\circ}\text{C}$ for (5±1) seconds.   |
| 3         | 耐焊接热<br>Resistance to Soldering Heat | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 在 $260\pm 5^{\circ}\text{C}$ 熔融的焊锡 (96.5Sn/3.0Ag/0.5Cu) 中浸 $10\pm 1\text{s}$ 。<br>Dip pads in flux and dip in solder pot (96.5Sn/3.0Ag/0.5Cu) at $260\pm 5^{\circ}\text{C}$ for (10±1) seconds.   |
| 4         | 端子强度<br>Terminal Strength            | 元件端子无松动、无脱落。<br>No looseness of shedding of terminals.  | 使用焊料将电感器焊接到试验板上, 然后按箭头方向分别施加 10N 的力, 保持时间 $10\pm 1\text{s}$ 。<br>The inductor is welded to the test plate with solder, and then applied 10 N force in the direction of arrow and kept for $10 \pm 1\text{s}$ .<br>   |
| 5         | 耐高温<br>High Temperature              | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 温度 $+125\pm 2^{\circ}\text{C}$ , 时间 $1000^{+2}_{-4}\text{h}$ , 在室温下放置 2 小时后、48 小时内测试。<br>Temperature $125\pm 2^{\circ}\text{C}$ , time $1000^{+2}_{-4}\text{h}$ , test within 48 hours after 2 hours of placement at room temperature.  |
| 6         | 耐低温<br>Low Temperature               | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 温度 $-40\pm 2^{\circ}\text{C}$ , 时间 $1000^{+2}_{-4}\text{h}$ ; 在室温下放置 2 小时后、48 小时内测试。<br>Temperature $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , time $1000^{+2}_{-4}\text{h}$ , test within 48 hours after 2 hours of placement at room temperature.  |
| 7         | 温度冲击<br>Thermal Shock                | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | $(-40\pm 3)^{\circ}\text{C}$ , 时间 $(30\pm 3)\text{min} \leftrightarrow (125\pm 2)^{\circ}\text{C}/(30\pm 3)\text{min}$ , 转换时间 (2~3) min, 循环 32 次; 在室温下放置 2 小时后、48 小时内测试。<br>The test sample shall be placed at $(-40\pm 3)^{\circ}\text{C}$ and $(125\pm 2)^{\circ}\text{C}$ for $(30\pm 3)\text{min}$ , different temperature conversion time is 2~3 minutes. The temperature cycle shall be repeated 32 cycles.<br>Test within 48 hours after 2 hours of placement at room temperature. |
| 8         | 温度特性<br>Temperature Characteristic   | 电感量变化率 $P_{c-b}, P_{c-d}$ 不超过 $\pm 20\%$ 。<br>Inductance change $P_{c-b}, P_{c-d}$ : Within $\pm 20\%$        | 在 $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ 的环境下测量电感量值, 分别与 $20^{\circ}\text{C}$ 环境下测量的电感量进行比较。<br>Based on the inductance at $20^{\circ}\text{C}$ and Measured at the ambient of $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ .   |
| 9         | 恒定湿热<br>Constant Damp Heat           | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 将电感器放置于湿度 (90~95)%RH, 温度 $60\pm 2^{\circ}\text{C}$ 的环境中存放 $1000^{+2}_{-4}\text{h}$ , 在室温下放置 2 小时后、48 小时内测试。<br>The inductors were stored for $1000 + 240\text{h}$ at humidity (90~95)%RH, temperature $60\pm 2^{\circ}\text{C}$ , and tested within 48h after 2H at room temperature.   |

(续上表 Continue the above table)

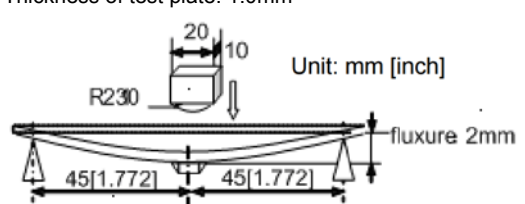
| 序号<br>No. | 项目<br>Items  | 要求<br>Requirements  | 试验方法及备注<br>Test Methods and Remarks   |
|-----------|--|---|---|
| 10        | 振动<br>Vibration                                      | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 使用焊料将电感器焊接到试验板上, 试验板固定于振动试验夹具使之与振动台刚性连接。试验按以下条件进行:<br>振动频率范围: 10Hz~55Hz<br>振幅: 1.5mm (加速度 $\leq 196\text{m/s}^2$ )<br>一次循环时间: 1min (10Hz→55Hz→10Hz)<br>振动时间: X/Y/Z 轴各 2H (共 6H)<br>The inductor is welded to the test plate with solder, and the test plate is fixed to the vibration test fixture so that it is rigidly connected with the vibration table. The test shall be conducted according to the following conditions:<br>Vibration frequency range: 10Hz~55Hz<br>Amplitude: 1.5mm (Acceleration $\leq 196\text{m/s}^2$ )<br>One cycle time: 1min (10Hz → 55Hz → 10Hz)<br>Vibration time: 2 hours for X/Y/Z axis ( Total of 6 hours)   |
| 11        | 弯曲试验<br>Resistance to Flexure                        | 外观无可见机械损伤;<br>No visible mechanical damage.   | 使用焊料将电感器焊接到试验板上, 然后施加一个垂直方向的力 (如图所示), 试验按以下条件进行:<br>弯曲度: 2mm<br>加压速度: 0.5mm/s<br>保持时间: $30\pm 1\text{s}$<br>测试板厚度: 1.0mm<br>The inductor is welded to the test plate with solder, and then apply a vertical force (as shown in the figure). The test shall be conducted according to the following conditions:<br>Curvature: 2mm<br>Pressurization speed: 0.5mm/s<br>Holding time: $30 \pm 1\text{s}$<br>Thickness of test plate: 1.0mm<br>   |
| 12        | 高温负载<br>(寿命)<br>High-temperature Load<br>(Life-span) | 外观无可见机械损伤;<br>电感量变化率: $\pm 10\%$ 以内。<br>No visible mechanical damage.<br>Inductance change: Within $\pm 10\%$ | 温度 $85\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$ , 时间 $1000\text{ }^\circ\text{C}^2\text{h}$ , 施加额定电流, 在室温下放置 2 小时后、48 小时内测试。<br>Temperature $85\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$ , Time $1000\text{ }^\circ\text{C}^2\text{h}$ , apply a rated current, test within 48 hours after 2 hours of placement at room temperature.<br>注: 加载电流时零件表面温度超过 $125\text{ }^\circ\text{C}$ 的, 需要对电流降额到零件表面温度不超过 $125\text{ }^\circ\text{C}$ 。<br>Note: If the surface temperature of the part over $125\text{ }^\circ\text{C}$ when the current is loaded, the current need to reduce until the surface temperature of the part less than $125\text{ }^\circ\text{C}$ . |

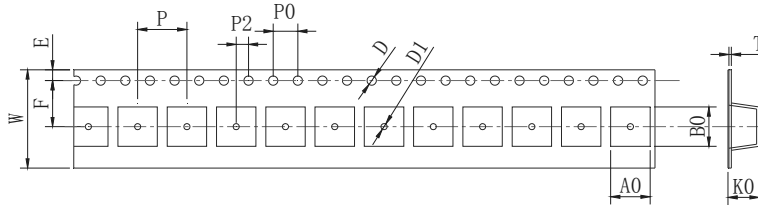

**◆包装**
**Packaging**
**\* 载带尺寸**
**Tape Dimension**


单位(Unit): mm

| 型号<br>Part | W      | A0       | B0       | D       | D1      | E        | F        | K0      | P0      | P2      | P       | T        |
|------------|--------|----------|----------|---------|---------|----------|----------|---------|---------|---------|---------|----------|
| 0420       | 12±0.5 | 4.5±0.3  | 5.1±0.3  | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 5.5±0.3  | 2.3±0.3 | 4.0±0.3 | 2.0±0.3 | 8.0±0.3 | 0.35±0.1 |
| 0520       | 12±0.5 | 5.3±0.3  | 5.4±0.3  | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 5.5±0.3  | 2.2±0.3 | 4.0±0.3 | 2.0±0.3 | 8.0±0.3 | 0.30±0.1 |
| 0530       | 12±0.5 | 5.3±0.3  | 5.4±0.3  | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 5.5±0.3  | 2.2±0.3 | 4.0±0.3 | 2.0±0.3 | 8.0±0.3 | 0.30±0.1 |
| 0630       | 16±0.5 | 7.0±0.3  | 7.0±0.3  | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 7.5±0.3  | 3.3±0.2 | 4.0±0.3 | 2.0±0.3 | 12±0.2  | 0.35±0.1 |
| 0650       | 16±0.5 | 6.6±0.3  | 7.6±0.3  | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 7.5±0.3  | 5.2±0.3 | 4.0±0.3 | 2.0±0.3 | 12±0.2  | 0.35±0.1 |
| 1040       | 24±0.5 | 10.5±0.3 | 11.4±0.3 | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 11.5±0.3 | 4.1±0.3 | 4.0±0.3 | 2.0±0.3 | 16±0.3  | 0.35±0.1 |
| 1050       | 24±0.5 | 10.5±0.3 | 11.4±0.3 | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 11.5±0.3 | 5.1±0.3 | 4.0±0.3 | 2.0±0.3 | 16±0.3  | 0.35±0.1 |
| 1250       | 24±0.5 | 13.0±0.3 | 15±0.3   | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 11.5±0.3 | 5.6±0.3 | 4.0±0.3 | 2.0±0.3 | 16±0.3  | 0.40±0.1 |
| 1265       | 24±0.5 | 13.0±0.3 | 13±0.3   | 1.5±0.3 | 1.5±0.3 | 1.75±0.3 | 11.5±0.3 | 6.8±0.3 | 4.0±0.3 | 2.0±0.3 | 16±0.3  | 0.40±0.1 |
| 1770       | 32±0.5 | 17.5±0.3 | 18.3±0.3 | 1.5±0.3 | ---     | 1.75±0.3 | 14.2±0.3 | 7.7±0.3 | 4.0±0.3 | 2.0±0.3 | 24±0.3  | 0.50±0.1 |

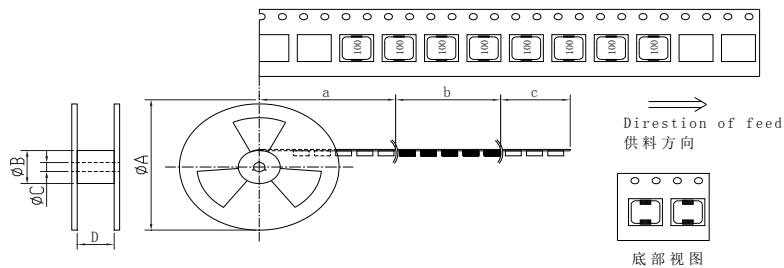**\* 卷盘尺寸及供料方向**
**Reel Size & Direction Of Feed**


单位(Unit): mm

| 型号<br>Part | A<br>(Typ.) | B<br>(Typ.) | C<br>(Typ.) | D<br>(Typ.) | a                    | b                  | c            |
|------------|-------------|-------------|-------------|-------------|----------------------|--------------------|--------------|
| 0420       | 330         | 100         | 13          | 12.4        | 空带<br>Blank portions | 装元件<br>Chip cavity | 引带<br>Leader |
| 0520       | 330         | 100         | 13          | 12.4        |                      |                    |              |
| 0530       | 330         | 100         | 13          | 12.4        |                      |                    |              |
| 0630       | 330         | 100         | 13          | 16.4        |                      |                    |              |
| 0650       | 330         | 100         | 13          | 16.4        |                      |                    |              |
| 1040       | 330         | 100         | 13          | 24.4        |                      |                    |              |
| 1050       | 330         | 100         | 13          | 24.4        |                      |                    |              |
| 1250       | 330         | 100         | 13          | 24.4        |                      |                    |              |
| 1265       | 330         | 100         | 13          | 24.4        |                      |                    |              |
| 1770       | 330         | 100         | 13          | 32.4        |                      |                    |              |

\* 包装数量

Packing quantity

| 型号<br>Part | 卷盘<br>Reel (PCS) | 纸盒<br>Box (PCS) | 纸箱<br>Carton (PCS) |
|------------|------------------|-----------------|--------------------|
| 0420       | 3,000            | 15,000          | 45,000             |
| 0520       | 2,000            | 10,000          | 20,000             |
| 0530       | 2,000            | 10,000          | 20,000             |
| 0630       | 1,500            | 6,000           | 12,000             |
| 0650       | 1,000            | 4,000           | 8,000              |
| 1040       | 750              | 2,250           | 4,500              |
| 1050       | 750              | 2,250           | 4,500              |
| 1250       | 500              | 1,500           | 3,000              |
| 1265       | 400              | 1,200           | 2,400              |
| 1770       | 300              | 600             | 1800               |

◆ 推荐使用的焊接曲线

Recommended soldering profile

\* 本产品建议使用回流焊接法

Applicable soldering process to the products is reflow soldering.

\* 焊接材料

焊料: Sn-3.0Ag-0.5Cu


Solder: Sn-3.0Ag-0.5Cu

助焊剂: 使用松香基助焊剂, 禁止使用卤化物含量超过 0.2wt% 的强酸性助焊剂和水溶性助焊剂。

Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine exceeding 0.2 wt%). Do not use water-soluble flux.

\* 焊接曲线

Soldering Profile

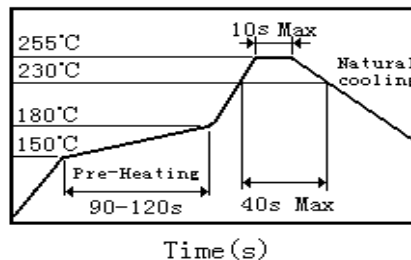

◆ 贮存要求

Storage Requirements

\* 存储期限: 为保证电感的焊接特性和包装材料处于良好状态, 请于本公司发货后 6 个月内使用本产品。同时, 由于电感的焊接特性会随时间发生变化, 如果贮存时间超过 6 个月, 请首先确认其焊接特性后再使用。

Storage Period: In order to ensure that the welding characteristics and packaging materials of the inductor are in good condition, please use this product within 6 months after the company ships it. At the same time, because the welding characteristics of the inductor will change with time, if the storage time exceeds 6 months, please confirm its welding characteristics before use.

\* 存储条件:

温度: -10 to +40°C (编带包装的电感器); -40 to +85°C (电感器本体)

相对湿度: 30~70%RH

Storage Conditions:

Temperature: -10 to +40°C ( Inductors With Taping); -40 to +85°C (Inductors Body)

Humidity: 30~70%RH

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Fenghua Advanced](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)