


TYPES DESCRIPTION

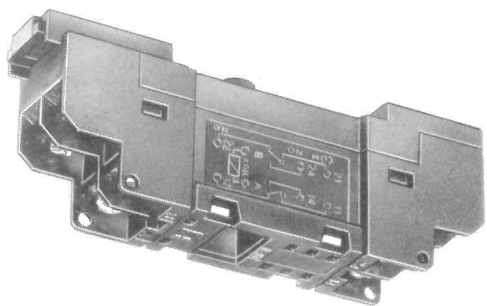

95.45

SCREW TERMINAL SOCKET

Panel or DIN 46277 rail mounting

- TYPE 95.42** For relays type 40.21
- TYPE 95.43** For relays type 40.31
- TYPE 95.45** For relays type 40.51 - 40.52 - 40.61


ACCESSORIES

TYPE 95.51 Retaining clip

CHARACTERISTICS

LOAD : 10A 250 V (5A max. each circuit)
 INSULATION RESISTANCE : $\geq 1,000 M\Omega$
 DIELECTRIC STRENGTH : $\geq 2 KV r.m.s.$
 BODY MATERIAL : Self-extinguishing PPE m glass reinforced
 TERMINALS MATERIAL : Cu Sn 6 Silver plated

Approved by :



95.15

P.C.B. SOCKET

- TYPE 95.12** For relays type 40.21
- TYPE 95.13** For relays type 40.31
- TYPE 95.15** For relays type 40.51 - 40.52 - 40.61



ACCESSORIES

TYPE 95.51 Retaining clip

CHARACTERISTICS

LOAD : 10A 250 V (5A max. each circuit)
 INSULATION RESISTANCE : $\geq 1,000 M\Omega$
 DIELECTRIC STRENGTH : $\geq 1,5 KV r.m.s.$
 BODY MATERIAL : Self-extinguishing PPE m glass reinforced
 TERMINALS MATERIAL : Cu Sn 6 Tin plated

Approved by :

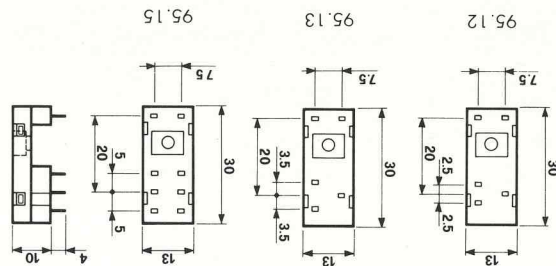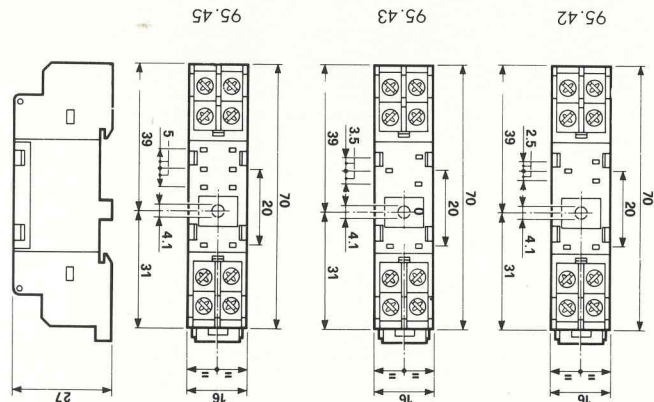

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ohmite](#) manufacturer:

Other Similar products are found below :

[OG1825](#) [6017E](#) [608-8E](#) [6112-EP-252E](#) [62645-10/10/10](#) [630HR025](#) [6532E](#) [CU1511](#) [D1000K5R0](#) [D100K600](#) [D225K2K2E](#) [D25K300](#)
[D25K750](#) [EVFL170EN4R7JE](#) [EVFT119EM47RJE](#) [EVFT170EN100JE](#) [F20J25KE](#) [F20J3K0E](#) [F30J50R](#) [F40J200](#) [F55J100](#) [F55J20K](#) [76303](#)
[805F10K](#) [805F250](#) [805F2K5](#) [805F75R](#) [80FR499](#) [810F20KE](#) [83FR121](#) [850F250](#) [MOX-1N-132505FE](#) [MOX-5-122002JE](#) [MOX-](#)
[750232506FE](#) [MOX-H-021004J](#) [MOX-H-042505JE](#) [MOX-J-045006F](#) [MOX-J-046004J](#) [PFE5K4R50](#) [PFR5K25R0](#) [90J10KE-B](#) [90J12K](#)
[90J47K](#) [90J56R](#) [90J5R6E](#) [91J2K2](#) [91J91RE](#) [92J1K0](#) [93J33R](#) [93J470](#)