


# MM Metal Film MELF Resistor

Quality • Reliability  
Cost-Down via Innovation.

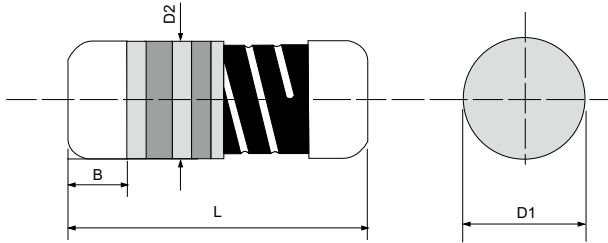

## Specifications Per

- IEC 60115-1
- EN140401-803

## Features

- SMD enabled structure
- Excellent solderability termination
- Products meet RoHS requirements and do not contain substances of very high concern identified by European Chemicals Agency

## DIMENSIONS

Type	Body Length (L, mm)	Cap Diameter (D1, mm)	Body Diameter (D2, mm)	Soldering Spot (B, mm)	Net Weight Per 1000 pcs
MM16	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/-0.15	0.6 Min.	17 grams
MM204	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/-0.15	0.6 Min.	17 grams
MM207	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/-0.2	1.0 Min.	66 grams
MM52	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/-0.2	1.0 Min.	66 grams

## GENERAL SPECIFICATIONS

Type	Power Rating At 70°C	Maximum Working Voltage	Maximum Overload Voltage	Minimum Resistance	Maximum Resistance	Resistance Tolerance	Available Resistance Values
MM16	1/6W	200V	400V	0, 0.51Ω	10MΩ	±1%	E-24/E-96
						±2%, ±5%	E-24
MM204	1/4W	200V	400V	0, 0.51Ω	10MΩ	±1%	E-24/E-96
						±2%, ±5%	E-24
MM207	1/3W	300V	500V	0, 0.51Ω	10MΩ	±1%	E-24/E-96
						±2%, ±5%	E-24
MM52	1/2W	300V	500V	0, 0.51Ω	10MΩ	±1%	E-24/E-96
						±2%, ±5%	E-24

For 1m~510mΩ please see CSM series. Special sizes and specifications available on request.

## PART NUMBER

Example: MM204F162RTKRTR3K0

MM204	F	162R	TKR	TR3K0
Type	Tolerance*	Resistance	TCR*	Packaging
	F (1%) G (2%) J (5%)	162Ω <b>4-character code</b> containing - 3 significant digits 1 letter multiplier  <b>OHM MULTIPLIER</b> R = 1 K = 10 <sup>3</sup> M = 10 <sup>6</sup> G = 10 <sup>9</sup>	50ppm <b>3-character code</b>  TKQ = ± 25ppm TKR = ± 50ppm TKS = ± 100ppm	<b>5-character code</b> TR = Tape Reel (pieces per reel) <b>MM16/MM204</b> 3K0 = 3,000 6K0 = 6,000** 10K = 10,000** <b>MM207/MM52</b> 2K0 = 2,000 6K0 = 6,000** 10K = 10,000**

\* Listed values may not be applicable across product types or to all resistance values. Please check with us before placing order. \*\*upon request

Quality • Reliability  
Cost-Down via Innovation.


MM

## TECHNICAL SUMMARY


Characteristics	Ranges & Limits	
Operating Temperature Range, °C	-55 ~ +125	
Temperature Coefficient, PPM / °C*	±1%, ±2%	±25, ±50, ±100
	±5%	±100
Dielectric Withstanding Voltage, VAC or DC	MM16, MM204	200
	MM207, MM52	500
Insulation Resistance, MΩ	>10 <sup>4</sup>	
Film Temperature, °C	MM16, MM204, MM207	125
	MM52	140
Tin Whisker (JESD201 Temperature Cycling & High Temp. / Humidity Storage), μm	<5	

\* Not applicable to all resistance values. Please check with us regarding the PPM of specific resistance value(s).


## POWER DERATING CURVE

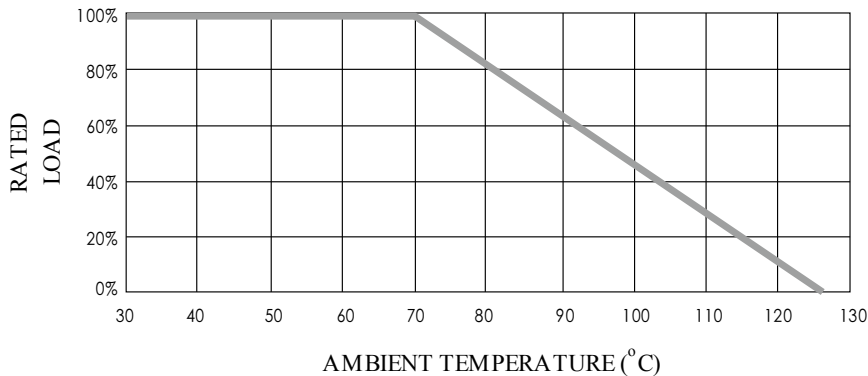

## SINGLE SURGE PERFORMANCE

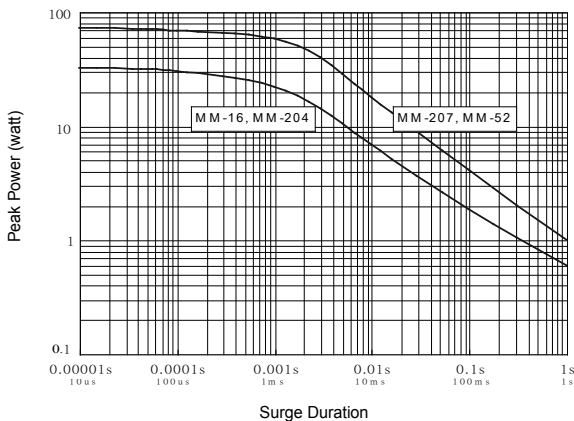

## SURGE POWER DERATING CURVE

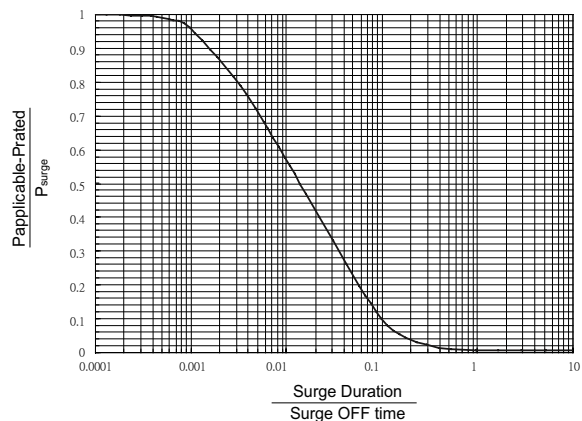

### Notes:


- SINGLE SURGE PERFORMANCE graph is good for NON REPETITIVE applications operating in an ambient temperature of 70°C or less. For temperatures above 70°C, the graph must be derated further linearly down to zero at 125°C.
- To determine applicable surge power in continuous-surge applications:
  1. Identify allowable duration and peak power P<sub>surge</sub> of single surge;
  2. Determine ratio of surge duration/surge OFF time in application;
  3. Calculate P<sub>applicable</sub> backwardly according to Y-axis of SURGE POWER DERATING CURVE.

## ■ PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits	
Short Time Overload	<b>IEC 60115-1 4.13</b> 5 seconds 2.5x rated voltage (not over max. overload voltage)	0.51Ω to 332KΩ	±0.25%
		>332KΩ	±0.5%
Load Life	<b>IEC 60115-1 4.25.1</b> Rated load (not over max. working voltage) 1,000 hours with 1.5 hours ON, 0.5 hour OFF, at (70±2)°C	0.51Ω to 332KΩ	±0.75%
		>332KΩ	±1.0%
Load Life In Humidity	<b>IEC 60115-1 4.24</b> 56 days rated load (not over max. working voltage) at (40±2)°C and (93±3)% relative humidity	0.51Ω to 332KΩ	±1.5%
		>332KΩ	±2.5%
Load Life In Humidity (accelerated mode)	<b>IEC 60115-1 4.37</b> 1,000 hours at 85°C and 85% relative humidity with 0.1x rated voltage (not over 100V)	0.51Ω to <100KΩ	±1.5%
		100KΩ to 332KΩ	±3.0%
		>332KΩ	±5.0%
Periodic Electric Overload	<b>IEC 60115-1 4.39</b> 3.9x rated voltage (not over max. overload voltage) with 0.1s ON, 2.5s OFF for 1,000 cycles	±1.0%	
Resistance To Soldering Heat	<b>IEC 60115-1 4.18.2</b> Dip the resistor into a solder bath measured (260±5)°C and hold it for a 10±1 seconds	±0.5%	
Thermal Endurance	<b>IEC 60115-1 4.25.3</b> 1,000 hours without load	85°C	±0.75%
		125°C	±1.0%
Thermal Shock	<b>IEC 60115-1 4.19</b> -55°C 30minutes, +125°C 30minutes	5 cycles	±0.5%
		1,000 cycles	±1.5%
Single pulse high voltage overload	<b>IEC 60115-1 4.27</b> • 5 pulses of 1.2/50µs at 10x rated voltage (not over 400V for MM16 & MM204; not over 500V for MM207 & MM52) with interval of 12 sec. • 10 pulses of 10/700µs at 10x rated voltage (not over 400V for MM16 & MM204; not over 500V for MM207 & MM52) with interval of 60 sec.	±0.5	
		±0.5	
Electrostatic discharge (Human body model)	<b>IEC 60115-1 4.38</b> 3 positive & 3 negative discharges with 2KV for MM16 & MM204 or 4KV for MM207 & MM52 (For continuous surge application please see Surge Performance paragraph)	±2.0	
Climatic test	<b>IEC 60115-1 4.23</b> 4.23.2 - dry heat: 16 hours 125°C 4.23.3 - damp heat: 24 hours 55°C with 95% relative humidity 4.23.4 - cold: 2 hours -55°C 4.23.5 - negative air pressure: 2 hour 8.5KPa at (25±10)°C 4.23.6 - damp heat cyclic: 5 days 55°C with 95% relative humidity 4.23.7 - DC load: rated voltage at -55°C and 125°C each 1 Min.	±1.0	
Solderability	<b>IEC 60115-1 4.17.2</b> Solder area covered after (235±3)°C/(2±0.2) seconds with flux applied	> 95%	
Vibration	<b>IEC 60115-1 4.22</b> Six hours in each parallel and axial direction with a simple harmonic motion having an amplitude of 1.52mm and 10 to 2,000 Hz.	±1.0%	
Bending test	<b>IEC 60115-1 4.33</b> Pressing depth 2mm, 3 times	±0.25%	
Flammability	<b>IEC 60115-1 4.35</b> Needle flame test 10s	No burning after 30s	

Quality • Reliability  
Cost-Down via Innovation.

■ SUGGESTED PAD LAYOUT

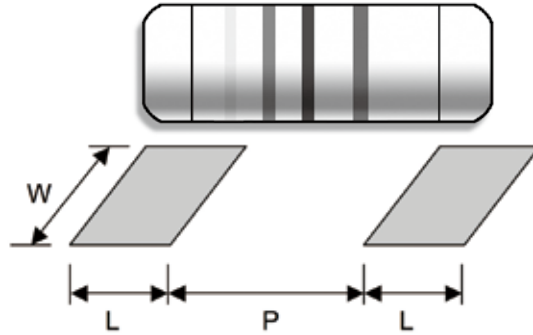


Type	Soldering Mode	Pad Length (L, mm, Min.)	Pad Spacing (P, mm)	Pad Width (W, mm, Min.)
MM16 MM204	Reflow	1.3	1.6 ± 0.1	1.6
	Wave	1.5	1.5 ± 0.1	1.8
MM207 MM52	Reflow	2.0	3.0 ± 0.1	3.0
	Wave	2.5	3.0 ± 0.1	3.0

For better heat dissipation / lower heat resistance, increase W & L.

■ COVER TAPE PEELING SPECIFICATION

Recommended peeling force: 50±5gf

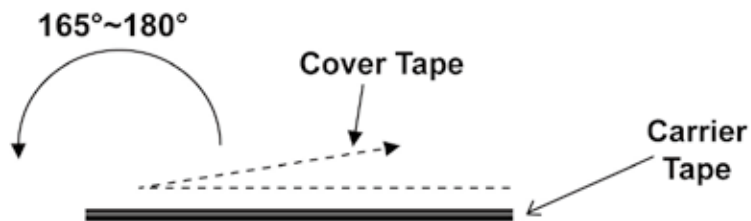

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors - SMD category](#):*

*Click to view products by [Firstohm manufacturer](#):*

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--19K6](#) [CR-05FL7--243R](#) [CR-05FL7--40K2](#) [CR-05FL7--698K](#) [CR-12FP4--324R](#) [CR-12JP4--680R](#)

[M55342K06B6E19RWL](#) [M55342K06B6E81RS3](#) [M55342M05B200DRWB](#) [M55342M06B4K70MS3](#) [MC0603-511-JTW](#) [742C083750JTR](#)

[MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ113](#) [MCR01MZPJ121](#)

[MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZHZJ103](#) [MCR03EZPF2004](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#)

[MCR18EZPJ330](#) [RC0603F1473CS](#) [RC0603F150CS](#) [RC1005F1152CS](#) [RC1005F1182CS](#) [RC1005F1372CS](#) [RC1005F183CS](#)

[RC1005F1911CS](#) [RC1005F1912CS](#) [RC1005F203CS](#) [RC1005F2052CS](#) [RC1005F241CS](#) [RC1005F2431CS](#) [RC1005F3011CS](#)

[RC1005F303CS](#) [RC1005F4321CS](#) [RC1005F4642CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#) [RC1005F6041CS](#)

[RC1005J106CS](#) [RC1005J121CS](#)