

FEATURES

- 1.90 mm square active area
- Low dark current
- Fast response time
- High speed epitaxy

DESCRIPTION

3.60 mm² High Speed Epitaxy Photodiode with P on N construction. Hermetically packaged in a TO-5 with a clear borosilicate glass window cap.

APPLICATIONS


- High speed photometry
- Optical communications
- Pulsed light detection
- Fiber optic light monitoring




ABSOLUTE MAXIMUM RATING

SYMBOL	PARAMETER	MIN	MAX	UNITS
T _{STG}	Storage Temp	-55	+125	°C
T _{OP}	Operating Temp	-40	+100	°C
V _{R(OP)}	Reverse Operating Voltage	-	50	V
I _(PEAK)	Peak DC Current	-	10	mA

SCHEMATIC



SPECTRAL RESPONSE

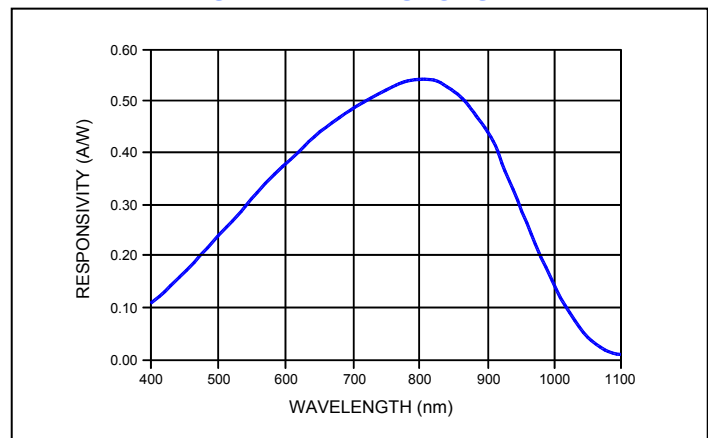

ELECTRO-OPTICAL CHARACTERISTICS @ 22° C

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
R _{SH}	Shunt Resistance	V _R = ±10 mV	100	200	---	MΩ
I _D	Dark Current	V _R = 20 V	---	0.4	2.0	nA
C	Capacitance	V _R = 0 V	---	90	---	pF
		V _R = 20 V	---	20	---	
	Responsivity	V _R = 0 V; λ = 632 nm	---	0.40	---	A/W
		V _R = 0 V; λ = 800 nm	---	0.52	---	
NEP	Noise Equivalent Power	V _R = 0 V; λ = 850 nm; R _L = 50 Ω	---	2.0 × 10 ⁻¹⁴	---	W/Hz ^{1/2}
		V _R = 20 V; λ = 850 nm; R _L = 50 Ω	---	5.0 × 10 ⁻¹⁴	---	
V _{BR}	Breakdown Voltage	I _R = 10 μA	30	50	---	V
t _r	Rise Time	V _R = 20 V; λ = 850 nm; R _L = 50 Ω	---	2.5	---	ns

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.

USA:

Pacific Silicon Sensor, Inc.
5700 Corsa Avenue, #105
Westlake Village, CA 91362 USA
Phone (818) 706-3400
Fax (818) 889-7053
Email: sales@pacific-sensor.com
www.pacific-sensor.com

7/7/2010

International sales:

Silicon Sensor International AG
Peter-Behrens-Str. 15
D-12459 Berlin, Germany
Phone +49 (0)30-63 99 23 10
Fax +49 (0)30-63 99 23 33
Email: sales@silicon-sensor.de
www.silicon-sensor.de

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photodiodes](#) category:

Click to view products by [First Sensor](#) manufacturer:

Other Similar products are found below :

[LTR-526AD](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [67-21SYGC-S349-TR8](#) [SFH 2200 A01](#) [HFD3081-108-XBA](#) [BPW 34 S E9601](#)
[SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BPV23FL](#) [BPW 34 FAS](#) [BPW 34 FS](#) [IG22X250S4I](#) [VTD205H](#) [VTD205KH](#) [VTP1220FBH](#) [VTP1232FH](#)
[VTP4085H](#) [SFH 2400](#) [OP913WSL](#) [OPF794](#) [PD70-01C/TR7](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#) [BPV23NF](#) [OP905](#) [LTR-](#)
[516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [QSB34CGR](#) [SFH 2500 FA](#) [SFH 213 FA](#) [PD15-22C/TR8](#) [VEMD5510C](#) [SFH 2200](#) [VEMD5510CF](#)
[APS5130PD7C-P22](#) [SAH230M](#) [SAH230M2](#) [SAH500M2](#) [BP 104 FS](#) [BPV22F-AS12](#) [BPW 21](#) [BPW 34 SR-Z](#) [BPX 65](#) [HSDL-5400#011](#)