
FEATURES

- Ø 7.80 mm active area
- Small gap
- Low dark current
- High resolution

DESCRIPTION

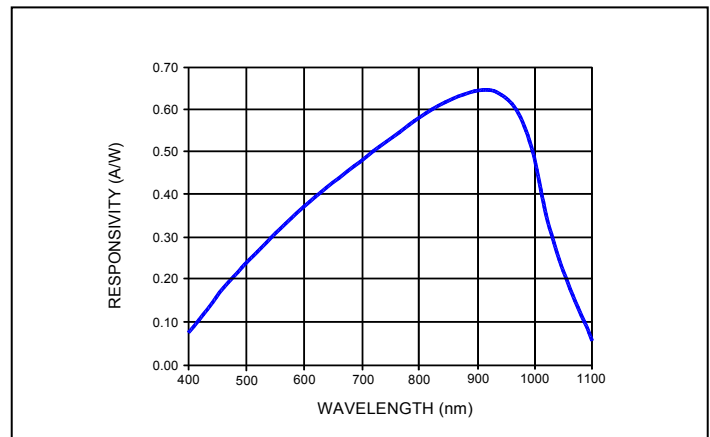

4 X 11.78 mm² Low Dark Current Quadrant Photodiode with P on N construction and 42 µm gaps. Packaged in a TO-8 with a non-hermetic ultra flat fused silica glass window cap. Also available with case isolated package.

APPLICATIONS

- Laser beam position sensor
- Autocollimators
- Optical tweezers
- Ellipsometers


ABSOLUTE MAXIMUM RATING

SYMBOL	PARAMETER	MIN	MAX	UNITS
T _{STG}	Storage Temp	-55	+125	°C
T _{OP}	Operating Temp	-40	+100	°C
V _{R(OP)}	Reverse Operating Voltage	-	50	V
I _(PEAK)	Peak DC Current	-	10	mA

SPECTRAL RESPONSE

SCHEMATIC

ELECTRO-OPTICAL CHARACTERISTICS @ 22° C

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _D	Dark Current*	V _R = 10 V	---	2.0	---	nA
C	Capacitance*	V _R = 10 V	---	---	25.0	pF
	Responsivity	V _R = 0 V; λ = 633 nm	---	0.40	---	A/W
		V _R = 0 V; λ = 900 nm	---	0.64	---	
V _{BR}	Breakdown Voltage	I _R = 10 µA	---	15	---	V
t _r	Rise Time	V _R = 10 V; λ = 850 nm; R _L = 50 Ω	---	40	---	ns
	Uniformity of Sensitivity	V _R = 10 V; λ = 880 nm	---	±1	±2	%

* per element

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.

USA:

Pacific Silicon Sensor, Inc.
 5700 Corsa Avenue, #105
 Westlake Village, CA 91362 USA
 Phone (818) 706-3400
 Fax (818) 889-7053
 Email: sales@pacific-sensor.com
www.pacific-sensor.com

International sales:

Silicon Sensor International AG
 Peter-Behrens-Str. 15
 D-12459 Berlin, Germany
 Phone +49 (0)30-63 99 23 10
 Fax +49 (0)30-63 99 23 33
 Email: sales@silicon-sensor.de
www.silicon-sensor.de

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photodiodes](#) category:

Click to view products by [First Sensor](#) manufacturer:

Other Similar products are found below :

[LTR-526AD](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [67-21SYGC-S349-TR8](#) [SFH 2200 A01](#) [HFD3081-108-XBA](#) [BPW 34 S E9601](#)
[SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BPV23FL](#) [BPW 34 FAS](#) [BPW 34 FS](#) [IG22X250S4I](#) [VTD205H](#) [VTD205KH](#) [VTP1220FBH](#) [VTP1232FH](#)
[VTP4085H](#) [SFH 2400](#) [OP913WSL](#) [OPF794](#) [PD70-01C/TR7](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#) [BPV23NF](#) [OP905](#) [LTR-](#)
[516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [QSB34CGR](#) [SFH 2500 FA](#) [SFH 213 FA](#) [PD15-22C/TR8](#) [VEMD5510C](#) [SFH 2200](#) [VEMD5510CF](#)
[APS5130PD7C-P22](#) [SAH230M](#) [SAH230M2](#) [SAH500M2](#) [BP 104 FS](#) [BPV22F-AS12](#) [BPW 21](#) [BPW 34 SR-Z](#) [BPX 65](#) [HSDL-5400#011](#)