

FLUKE®

80PT-25 SureGrip™ Piercing Temperature Probe

Instruction Sheet

⚠⚠ Warning

To avoid electrical shock, do not use this probe when voltages exceeding 24 V ac rms or 60 V dc are present. The probe tip is electronically connected to the output terminals.

Introduction

The 80PT-25 SureGrip™ Piercing Temperature Probe is designed for use in liquids, gels, soft, and semi-hard materials. The probe is made of 316 stainless steel, which is suitable for food service use. The thermocouple junction of the probe is protected from tip to handle by the stainless steel sheath. The 40-inch (1-meter) cable is terminated with a Type T miniature thermocouple connector with 0.792-mm (.312-inch) pin spacing. The 80PT-25 can be used with any temperature-measuring instrument that is designed to accept Type T thermocouples and has a miniature connector input.

Specifications

Type

T, Copper/Constantan

Measurement Range of Stainless Steel Probe

-196 °C to 350 °C (-320.8 °F to 662 °F)

Accuracy

(With respect to ANSI MC96.1 Standard Limits of Error)

Note

All error calculations should be done in °C and then scaled to °F.

Range	Accuracy (% of reading)
-196 °C to -150 °C (-320.8 °F to -238 °F)	±3 %
-150 °C to -40 °C (-238 °F to -40 °F)	±2 °C
-40 °C to 0 °C (-40 °F to 32 °F)	±1 °C
0 °C to 350 °C (32 °F to 662 °F)	Max (±1 °C, ±0.75 % of reading)

November 2004

© 2004 Fluke Corporation. All rights reserved.

All product names are trademarks of their respective companies

Output

@ 25 °C (77 °F) =1.00 mV (reference junction at 0 °C)

Seebeck Coefficient @ 25 °C (77 °F) = 40.50 $\mu\text{V} / ^\circ\text{C}$

Measurement Time (Time Constant): 3.0 seconds in 100 °C still water at sea level pressure (5 time constants = 1 complete step change, i.e., 5 seconds)

Maximum Voltage 24 V ac rms or 60 V dc

Maximum Temperature of Tip 816 °C (1500 °F)

Sheath

Material: 316 Stainless Steel Dimensions

Diameter: 3.4036 mm (.134 in)

Length: 10.16 cm (4 in)

Tip: 25 ° conical

Grounding Junction welded to sheath

Cable

Length: 40 inches (1 meter)

Insulation

Material: PVC

Maximum Temperature: 105 °C (221 °F)

Jacket Color: Gray

Food Service Limitation: The cable should not come in contact with food.

Conductors

Type: T

Size: AWG #24 stranded (7 strands of #32)

Handle

Material: Hytrel (food service grade)

Maximum Temperature of Food in Contact with Handle:
65 °C (150 °F)

Connector

Type: Mini-thermocouple connector with .792 mm (.0312 in) pin spacing

Material: Blue Hytrel (food service grade)

Maximum Temperature: 125 °C (257 °F)

Overall Probe Length 22.23 cm (8.75 in) from tip to end of cable strain relief

Protection Class 3. Relates solely to insulation and grounding properties defined in IEC 348.

Measurement Considerations

Instrument Compatibility

The 80PT-25 is compatible with any temperature-measuring instrument that accepts Type K thermocouples, has a miniature thermocouple connector, and has cold reference junction compensation. Accuracy of the temperature-measuring instrument must be considered along with the 80PT-25 accuracy specification to determine the overall accuracy of the combination.

Temperature Limitations

The tip of the 80PT-25 has a continuous temperature rating of 350 °C (662 °F). However the opposite end of the sheath nearest the handle should not be subjected to temperatures greater than 125 °C. This is the maximum temperature limitation of the Hytrel handle. See Food Service Limitations.

Exposure Limitations

The sheath material of the 80PT-25 is stainless steel. It should not be exposed to halides or sulfides.

Food Service Limitations

The 316 stainless steel probe is suitable for contact with hot or cold foods within the specified temperature range of the probe. However the handle is made of Hytrel 5556 which is suitable for repeat food contact only under the following conditions: food temperature under 65 °C (150 °F), food alcohol content under 8 %. Food may be wet, dry, or fatty. Also, the cable should not come in contact with food.

Operation

Use the 80PT-25 as follows:

1. Connect the 80PT-25 to a compatible Type T measuring instrument using the miniature (0.312 inch spacing) thermocouple connector.
2. Turn on the measuring instrument, and select the appropriate range and scale.
3. Check the read out on the measuring instrument. With no heat or cold source applied to the bead, the measuring instrument should display the ambient (room) temperature. If the instrument does not read out properly, refer to "Troubleshooting".

Measuring Technique

The 80PT-25 should be inserted at least 31.75 mm (1.25 in) into the substance to be measured to minimize the shunting effect of the sheath.

Troubleshooting

With no heat or cold applied to the probe, the measuring instrument should display the ambient temperature. If the measuring instrument does not read out properly, try the following:

1. Verify that the measuring instrument is designed to be used with Type T thermocouples. The measuring instrument should have a blue input connector and / or be marked with a "T".
2. Check for an open circuit indicator on the measuring instrument. Some temperature-measuring instruments have a built-in circuit to indicate if the connected probe is open. (All Fluke temperature-measuring instruments have this feature.) Refer to the owner's manual accompanying the measuring instrument to see if this feature is available.
3. Short the two input pins of the measuring instrument with a piece of wire. If the instrument is functioning, it should indicate the ambient temperature.
4. If you suspect a broken connection, use an ordinary ohmmeter to read the continuity of the probe from pin to pin. The ohmmeter should read 20 ohms or less if there is continuity.


Scale Conversions

Use the following equation to convert °C to °F:

$$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$$

Use the following equation to convert °F to °C:

$$(^{\circ}\text{F} - 32) \times 0.5556 = ^{\circ}\text{C}$$

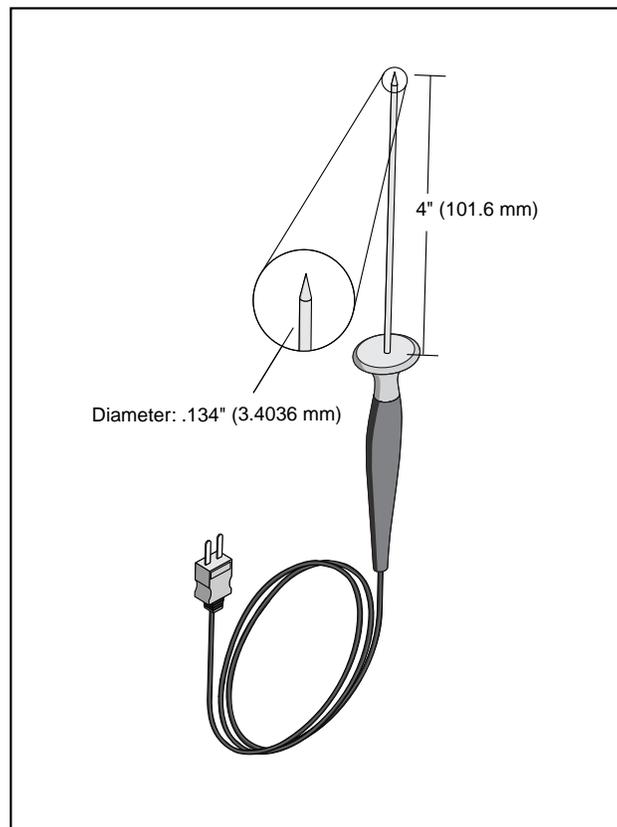

bad01f.eps

Figure 1. 80PT-25

Contacting Fluke

For application or operation assistance, or information on Fluke products, call:

USA: 1-888-44-FLUKE (1-888-443-5853)

Canada: 1-800-36-FLUKE (1-800-363-5853)

Europe: +31 402-675-200

Japan: +81-3-3434-0181

Singapore: +65-738-5655

Anywhere in the world: +1-425-446-5500

For USA Service: 1-888-99-FLUKE

(1-888-993-5853)

Or, visit Fluke's Web site at www.fluke.com.

To register your product, visit register.fluke.com

ONE YEAR LIMITED WARRANTY

This Fluke product will be free from defects in material and workmanship for one year from the date of purchase. This warranty does not cover fuses, disposable batteries, or damage from accident, neglect, misuse, alteration, contamination, or abnormal conditions of operation or handling. Resellers are not authorized to extend any other warranty on Fluke's behalf. To obtain service during the warranty period, contact your nearest Fluke authorized service center to obtain return authorization information, then send the product to that Service Center with a description of the problem.

THIS WARRANTY IS YOUR ONLY REMEDY. NO OTHER WARRANTIES, SUCH AS FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSED OR IMPLIED. FLUKE IS NOT LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES, ARISING FROM ANY CAUSE OR THEORY. Since some states or countries do not allow the exclusion or limitation of an implied warranty or of incidental or consequential damages, this limitation of liability may not apply to you.

Fluke Corporation
P.O. Box 9090
Everett, WA 98206-9090
U.S.A.

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Fluke](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK2-5MM-102](#) [382254](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-125](#) [PK1-5MM-127](#) [PP026-1](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4013](#) [4014](#) [4015](#) [4016](#) [4018](#) [P TK-100](#) [P TK-250/100](#) [UTH05](#) [402-IEC-RT](#) [402-IEC-SW](#)