

TECHNICAL DATA

AC288 SureGrip™ **Terminal Block Probe**



PROBE DIAMETER

1 mm, tip extends out to 8.4 mm (0.33 in) length

OPERATING TEMPERATURE

-20 °C to 55 °C (-4 °F to 131 °F)

Fluke TL224, TL222 or TL221 test

SAFETY CERTIFICATIONS

IEC 61010-031 Ed.1.12008, CAT III 1000 V, CAT IV 600 V


WARRANTY

One-year

Expand your testing capabilities with high-quality SureGrip™ accessories

The Fluke AC288 Terminal Block Probe features a retractable probe tip that provides safe and secure connections to clamp and screw type terminal blocks.

- Retractable probe tip designed for increased safety, while providing flexibility to reach deep connection points
- Recommended for use with TL224, TL222 or TL221 test leads
- 11.5 cm (4.5 in) insulated, flexible shaft
- 1 mm diameter probe tip extends out to 8.4 mm (0.33 in)
- · Retractable probe tip is made with stainless steel
- Safety rated: IEC 61010-031 Ed.1.12008, CAT III 1000 V, **CAT IV 600 V**
- Operating temperature: -20 °C to 55 °C (-4 °F to 131 °F), 90 % RH

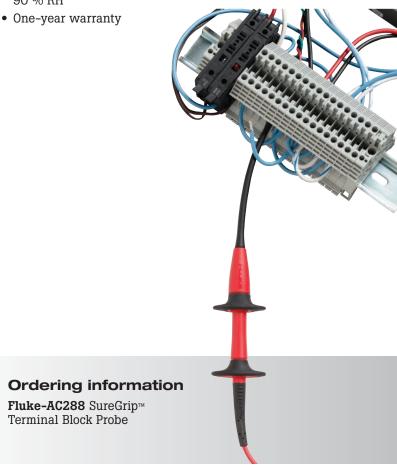

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Clips category:

Click to view products by Fluke manufacturer:

Other Similar products are found below:

010000 923743-16 BU-656-0 4140A 4324A TL820 TL822 5116 5450 5216 5252 5454 5694 923700 923698 CR0060 3038 927739-20 923743-14 932146101 930318100 930126101 Z-SB3FA3250AAAB04001 Z-S11F0107G1000 Z-S11F0207B1520 Z-S11F0207B2030 Z-S11F0207B15000 Z-SB3FA3226AAAB11001 Z-S11F0207B1010 923706 930317800 973889100 972405100 972405101 R999720600 949-1 458-3 SK 201200278 020 BU-65-B BU-21CPN-GZZZ PK-HVA-02 BU-25C-DZZZ BU-142-2 00425 R8-1A RED R8-54 BLACK R8-54 RED MA1SW MA260SH SW AX-CR-02-SET