

Test Leads, Probes & Clips

Test Leads & Probe Sets

TL71 Premium Test Lead Set

- One pair (red, black) comfort grip probes with silicone insulated, right-angle test leads
- Replacement test leads for 80 Series IV DMMs
- Recommended for uV measurements
- CAT III, 1000V, 10A rating. UL listed



TL74 4 mm Diameter Test Lead Set

- One pair (red, black) 1.5 meter long silicone test leads with 4 mm spring probe tips for probing standard banana plugs
- Removable, insulated IC caps allow probing on closely spaced leads
- CAT III, 1000V. UL listed



TL75 Hard Point™ Test Lead Set

- One pair (red, black) comfort grip probes with PVC insulated, test leads with right-angle shrouded banana plugs
- Recommended for general purpose measurements
- CAT III, 1000V, 10A rating. UL listed



Modular Probes & Clips

AC20 Heavy Duty Alligator Clips

- One pair (red, black) safety grip, spring loaded alligator clips
- Insulated jaws with wide 20 mm opening
- CAT III, 1000V, 10A rating.



AC70A Alligator Clips

- Slide-on alligator clips (red, black) for test probes with 1.93 mm to 2.13 mm long tips
- Gold-plated jaws provide 8mm opening
- CAT III, 600V, 10A rating.



AC80 Heavy Duty Hook-Style Test Clips

- One pair (red, black) safety grip, spring loaded hook clips
- Hook opening is 10mm x 2mm
- CAT III, 1000V, 3A rating.



AC83 Heavy Duty Pin-Grabber Test Clips

- One pair (red, black) safety grip, spring loaded pin grabber hooks
- Flexible shaft is 100mm long and grabber extends 9.5mm
- CAT III, 1000V, 1A rating.



TP74 Lantern Tip Test Probes

- One pair (red, black)
- Tips include banana-style spring contacts with nickel-plated brass ends
- Category III, 1000V, 10A rating
- Use with TL22 and TL24 Test leads




AC85A Large Jaw Alligator Clips

- One pair (red, black) fully insulated banana jack alligator clips
- Curved jaw (20 mm opening), strong teeth and spring provide superior grip
- CAT III, 600V, 10A rating.




AC89 Heavy Duty Insulation Piercing Test Clip

- Single probe pierces 0.25 to 1.5 mm insulated wire
- Small pin allows self-healing of the insulation
- CAT III, 1000V, 5A rating.



TP1, TP2, TP4 & TP38 Slim Reach Test Probes

- Slender probe bodies for probing closely spaced or recessed terminals
- Hard stainless steel probe tips (red, black)
- CAT III, 1000V, 10A rating. UL listed.
- **TP1** has a flat blade design to hold securely in blade type electrical wall sockets.
- **TP2** has 2mm diameter tip for electronics work. Also compatible with AC70A alligator clips
- **TP4** has 4mm diameter probe tip designed to fit securely into IEC electrical wall outlets
- **TP38** has Insulated Probe Tip (Designed To Meet GS38 Specs for United Kingdom) Use with TL22 and TL24 Test leads

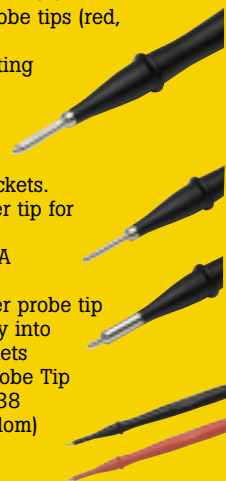

TP20 Industrial Test Probes

- One pair (red, black)
- Extra long, very sharp stainless steel tips for probing recessed components and piercing insulation
- CAT III, 1000V, 10A rating.



TP80 Electronic Test Probes

- One pair (red, black)
- IC insulated cap prevents shortening of IC legs for probing high density components or boards
- CAT III, 1000V, 10A rating.





this product is available from:



Thurlby Thandar Instruments Ltd.

Glebe Road, Huntingdon
Cambs. PE29 7DR England

Tel: 01480 412451

Fax: 01480 450409

email: sales@tti-test.com

web: www.tti-test.com

*TTi is an official technical distributor for the Fluke Test Tools
and Bench Instruments range in the UK.*

We aim to keep many of the most popular products in stock for immediate delivery.

*We can provide technically based advice on the use of these products and our sales engineers will
be pleased to arrange a demonstration.*



Measurably Better Value

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Fluke](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK2-5MM-102](#) [382254](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-125](#) [PK1-5MM-127](#) [PP026-1](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4013](#) [4014](#) [4015](#) [4016](#) [4018](#) [P TK-100](#) [P TK-250/100](#) [UTH05](#) [402-IEC-RT](#) [402-IEC-SW](#)