

FRM18 RELAY




Miniature Slim Type Relay

FEATURES

Small Size & Slim Type (5mm wide & 12.5mm High)
Switching capacity up to 5A
2KV Dielectric Strength
High Sensitivity 0.12W
Fully sealed type

& VDE



SPECIFICATIONS

COIL RATING

RATED VOLTAGE V DC	COIL RESISTANCE $\Omega \pm 10\%$	RATED CURRENT (mA)	MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION (W)
			% OF RATED VOLTAGE (At +20 °C)			
5	208	24	70 Max.	5 Min.	120	0.12W Approx. 0.18W Approx. For 24VDC
6	300	20				
9	675	13.3				
12	1200	10				
18	2700 \pm 15%	6.7				
24	3200 \pm 15%	7.5				

CHARACTERISTICS

Contact Arrangement	SPST(1 Form A)
Contact Material	Silvery Alloy
Contact Resistance	< 50m Ω (At 1A 6VDC)
Contact Rating (Resistive Load)	5A 250VAC/ 30VDC
Max. Switching Voltage	AC 250V/ DC 110V
Max. Switching Power	1250VA/ 150W
Operate Time (Initial)	10ms Max.
Release Time (Initial)	5ms Max.
Insulation Resistance	1000M Ω Min. (at 500V DC)
Dielectric Strength	1000V AC (50Hz/min.) Between open contacts 2000VAC (50Hz/min.) Between coil and contact
Surge Voltage	4000V (1.2 X 50 μ s)
Shock Resistance	Functional : 147m/s ² 11ms Endurance : 980m/s ² 6ms
Vibration Resistance	1.5mm Double Amplitude 10 - 55Hz
Ambient Temperature	-40°C to +70°C
Humidity	5 - 85% RH
Operation Life	Electrical : 3A : 1x10 ⁵ 5A : 1x10 ⁴ Mechanical : 2x10 ⁷
Weight	3g Approx.

[Specifications are subject to change without notices.]

FORWARD INDUSTRIAL COMPANY. (O/B COMMERCIAL UNION LTD)

RM. 1405, Wu Sang House, 655 Nathan Road, Mongkok, Kowloon, Hong Kong.

TEL : (852) 27892365 FAX : (852) 27893102 E-MAIL : sales@ficrelay.com.hk


WEBSITE : <http://www.ficrelay.com.hk>

FRM18 RELAY



ORDERING INFORMATION

FRM18 A - 5 DC 12V

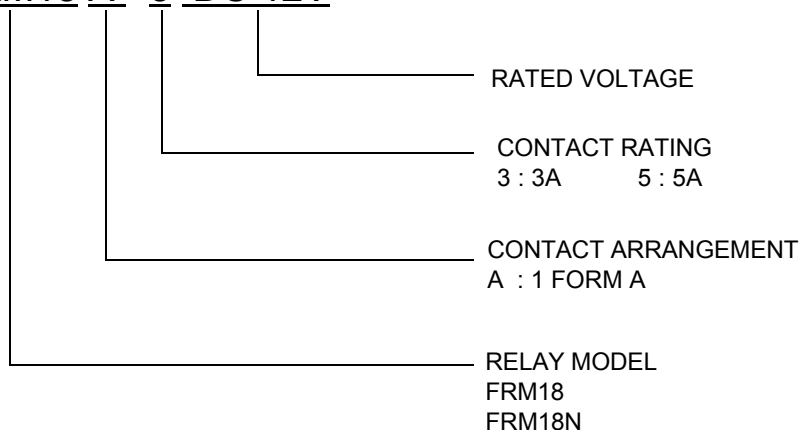

Note : Pb-Free and RoHS compliant relays are available.


For ordering, please add suffix "Pb-Free" or "RoHS" to standard relay part numbers.

For example : FRM18A-5 DC 12V "Pb-Free" for Pb-Free Relay


For example : FRM18A-5 DC 12V "RoHS" for RoHS Compliant Relay

DIMENSIONS (UNIT:mm)


FRM18

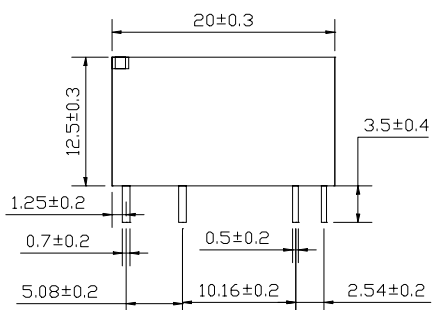


PCB LAYOUT

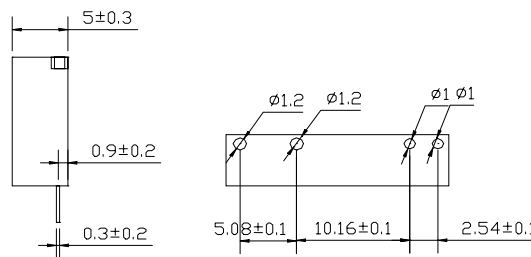


FRM18N

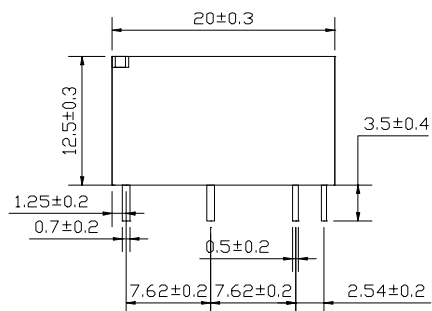

PCB LAYOUT

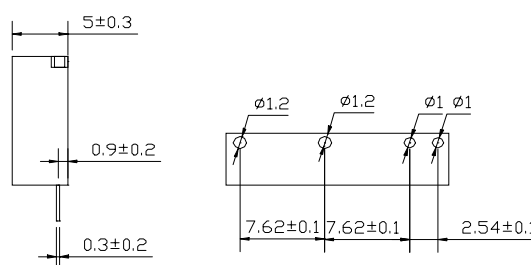

WIRING DIAGRAM



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Forward](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)