

## FS431S


SOT-23

1.Reference  
2.Cathode  
3.Anode



### ■ DESCRIPTION&SYMBOL 功能和符號

輸出電壓從基準電壓到 36 伏可調的穩壓二極管



### ■ MAXIMUM RATINGS 最大額定值

Characteristic 特性參數	Symbol 符號	Rating 額定值	Unit 單位
Cathode to Anode Voltage 陰極到陽極電壓	$V_{KA}$	36	V
Cathode Current Range(Continuous)	$I_{KA}$	-100 ~ +150	mA
Reference Input Current Range 基準電流	$I_{ref}$	0.05 ~ 10	mA
Power Dissipation 耗散功率	PD	200	mW
Operating Temperature 工作溫度	$T_{opr}$	0~70	°C
Storage Temperature 儲存溫度	$T_{stg}$	-55 ~ +150	°C

### ■ DEVICE MARKING 打標

FS431S=431.



## FS431S

### ■ ELECTRICAL CHARACTERISTICS 電特性


( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如無特殊說明，溫度為  $25^{\circ}\text{C}$ )

Characteristic 特性參數	Symbol 符號	Test Condition 測試條件	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Reference Input Voltage 基準電壓精度	$V_{REF}$ 0.5% 1% 2%	$V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$	2.483 2.470 2.445	2.495 2.495 2.495	2.507 2.520 2.545	V
Deviation of reference Input Voltage Over temperature 标准温度内基准電壓偏差	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$ $0 \sim 70^{\circ}\text{C}$	—	10	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage 陰極電壓与基准電壓变化比	$\Delta V_{REF}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$ $\Delta V_{KA}=10\text{V} \sim V_{REF}$ $\Delta V_{KA}=36\text{V} \sim 10\text{V}$	—	-1.0 -0.5	-2.7 -2.0	mV/V
Reference Input Current 基準電流	$I_{REF}$	$I_{KA}=10\text{mA}$ $R1=10\text{k}\Omega, R2=\infty$	—	0.22	4	$\mu\text{A}$
Deviation of Reference Input Current Over Full Temperature Range 标准温度内基准電流偏差	$\Delta I_{REF}/\Delta T$	$I_{KA}=10\text{mA}$ $R1=10\text{k}\Omega, R2=\infty$ $T_A=\text{Full Temperature}$	—	0.4	1.2	$\mu\text{A}$
Minimum Cathode Current for Regulation 最小陰極電流	$I_{KA}(\text{MIN})$	$V_{KA}=V_{REF}$	—	0.45	1.0	mA
Off-state Cathode Current 关闭状态陰極電流	$I_{KA}(\text{OFF})$	$V_{KA}=36\text{V}$ $V_{REF}=0\text{V}$	—	0.05	1.0	$\mu\text{A}$
Dynamic Impedance 輸出阻抗	$Z_{KA}$	$V_{KA}=V_{REF}$ $I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1\text{kHz}$	—	0.15	0.5	$\Omega$


FS431S

■ DIMENSION 外形封裝尺寸

單位(UNIT): mm

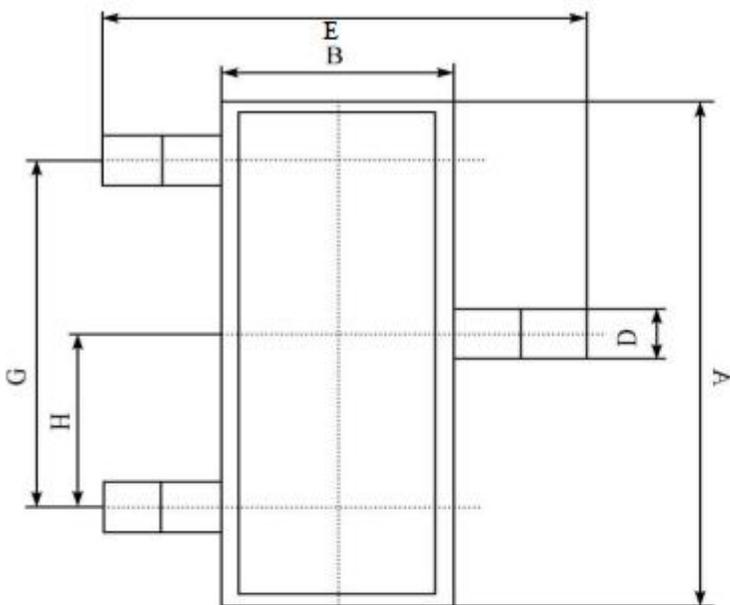

代碼	範圍(單位:mm)
A	2.80~3.00
B	1.20~1.40
C	0.90~1.10
D	0.30~0.50
E	2.20~2.60
G	1.80~2.00
H	0.90~1.00
J	0.08~0.18
K	0.02~0.12
M	≥0.22
N	0.50~0.70
P	6°~10°

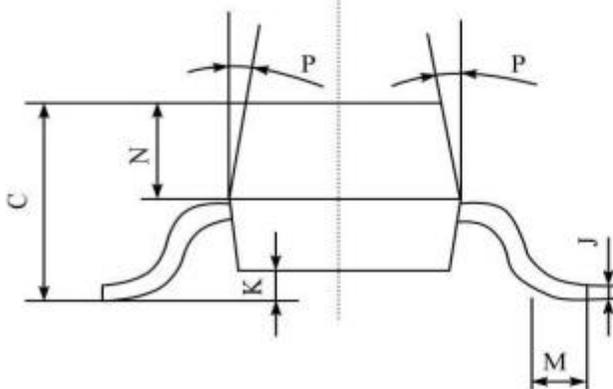



安徽富信半導體科技有限公司  
ANHUI FOSAN SEMICONDUCTOR TECHNOLOGY CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Voltage References](#) category:*

*Click to view products by [FOSAN](#) manufacturer:*

Other Similar products are found below :

[AS431ARTR-E1](#) [AZ431BR-ATRE1](#) [5962-8686103XC](#) [NCV431BVDMR2G](#) [SCV431AIDMR2G](#) [REF01J/883](#) [SC431ILPRAG](#) [AP432AQG-7](#) [LM4040B25QFTA](#) [TL431BL3T](#) [TL431ACZ](#) [KA431SLMF2TF](#) [KA431SMF2TF](#) [KA431SMFTF](#) [LM4040QCEM3-3.0/NOPB](#) [LM4041C12ILPR](#) [LM4050AIM3X-5.0/NOPB](#) [LM4120AIM5-2.5/NOP](#) [LM431SCCMFX](#) [ZXRE250BSA-7](#) [ZXRE125DN8TA](#) [TS3330AQPR](#) [ZXRE250ASA-7](#) [ZTL431ASE5TA](#) [ADR3512WCRMZ-R7](#) [REF3012AIDBZR](#) [LM385BM-2.5/NOPB](#) [LM385D-2.5R2G](#) [LM4040AIM3-10.0](#) [LM4040CIM3-10.0](#) [LM4040CIM3X-2.0/NOPB](#) [LM4041DH5TA](#) [LM4041QDIM3-ADJ/NO](#) [LM4051BIM3-ADJ/NOPB](#) [LM4051CIM3X-1.2/NOPB](#) [LM4128CMF-1.8/NOPB](#) [LM4132DMF-1.8/NOPB](#) [LM4132EMF-1.8/NOPB](#) [LM4132EMF-2.0/NOPB](#) [LM431CIM](#) [LM385BD-2.5R2G](#) [LM385M-2.5/NOPB](#) [LM4030AMF-4.096/NOPB](#) [LM4040D30ILPR](#) [AP432YG-13](#) [AP431IANTR-G1](#) [AP431AWG-7](#) [AS431ANTR-G1](#) [AS431AZTR-G1](#) [AS431BZTR-E1](#)