


FSS2301S

SOT-23 場效應晶體管(SOT-23 Field Effect Transistors)

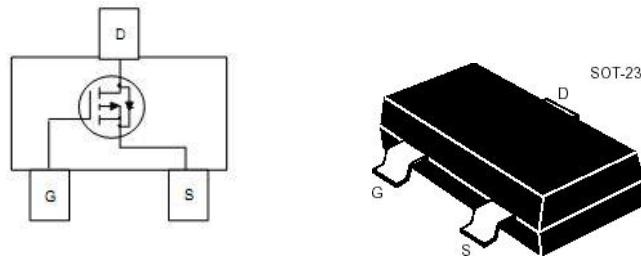

P-Channel Enhancement-Mode MOS FETs

P 沟道增强型 MOS 场效应管

■MAXIMUM RATINGS 最大額定值

Characteristic 特性參數	Symbol 符號	Max 最大值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	BV_{DSS}	-20	V
Gate- Source Voltage 柵極-源極電壓	V_{GS}	± 10	V
Drain Current (continuous) 漏極電流-連續	I_D	-2.3	A
Drain Current (pulsed) 漏極電流-脈沖	I_{DM}	-8	A
Total Device Dissipation 總耗散功率	P_D	700	mW
TA=25°C 環境溫度為 25°C			
Junction 結溫	T_J	150	°C
Storage Temperature 儲存溫度	T_{stg}	-55 to +150	°C

■DEVICE MARKING 打標

FSS2301S

■ ELECTRICAL CHARACTERISTICS 電特性

($T_A=25^\circ\text{C}$ unless otherwise noted 如無特殊說明，溫度為 25°C)


Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓($I_D = -250\mu\text{A}, V_{GS} = 0\text{V}$)	BV_{DSS}	-20	—	—	V
Gate Threshold Voltage 柵極開啓電壓($I_D = -250\mu\text{A}, V_{GS} = V_{DS}$)	$V_{GS(\text{th})}$	-0.4	-0.62	-1.5	V
Diode Forward Voltage Drop 內附二極管正向壓降($I_S = -0.75\text{A}, V_{GS} = 0\text{V}$)	V_{SD}	—	—	-1.5	V
Zero Gate Voltage Drain Current 零柵壓漏極電流($V_{GS} = 0\text{V}, V_{DS} = -16\text{V}$) ($V_{GS} = 0\text{V}, V_{DS} = -16\text{V}, T_A = 55^\circ\text{C}$)	I_{DSS}	—	—	-1 -10	μA
Gate Body Leakage 柵極漏電流($V_{GS} = \pm 8\text{V}, V_{DS} = 0\text{V}$)	I_{GSS}	—	—	± 100	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻($I_D = -1.5\text{A}, V_{GS} = -4.5\text{V}$)	$R_{DS(\text{ON})}$	—	90	120	$\text{m}\Omega$
Static Drain-Source On-State Resistance 靜態漏源導通電阻($I_D = -1.5\text{A}, V_{GS} = -2.5\text{V}$)	$R_{DS(\text{ON})}$	—	115	150	$\text{m}\Omega$
Input Capacitance 輸入電容 ($V_{GS} = 0\text{V}, V_{DS} = -10\text{V}, f = 1\text{MHz}$)	C_{ISS}	—	200	—	pF
Output Capacitance 輸出電容 ($V_{GS} = 0\text{V}, V_{DS} = -10\text{V}, f = 1\text{MHz}$)	C_{OSS}	—	80	—	pF
Turn-ON Time 开啓時間 ($V_{DS} = -10\text{V}, I_D = -2.7\text{A}, R_{GEN} = 6\Omega$)	$t_{(\text{on})}$	—	8	—	ns
Turn-OFF Time 关斷時間 ($V_{DS} = -10\text{V}, I_D = -2.7\text{A}, R_{GEN} = 6\Omega$)	$t_{(\text{off})}$	—	60	—	ns

Pulse Width $\leq 300\ \mu\text{s}$; Duty Cycle $\leq 2.0\%$


FSS2301S

■ DIMENSION 外形封裝尺寸

單位(UNIT): mm

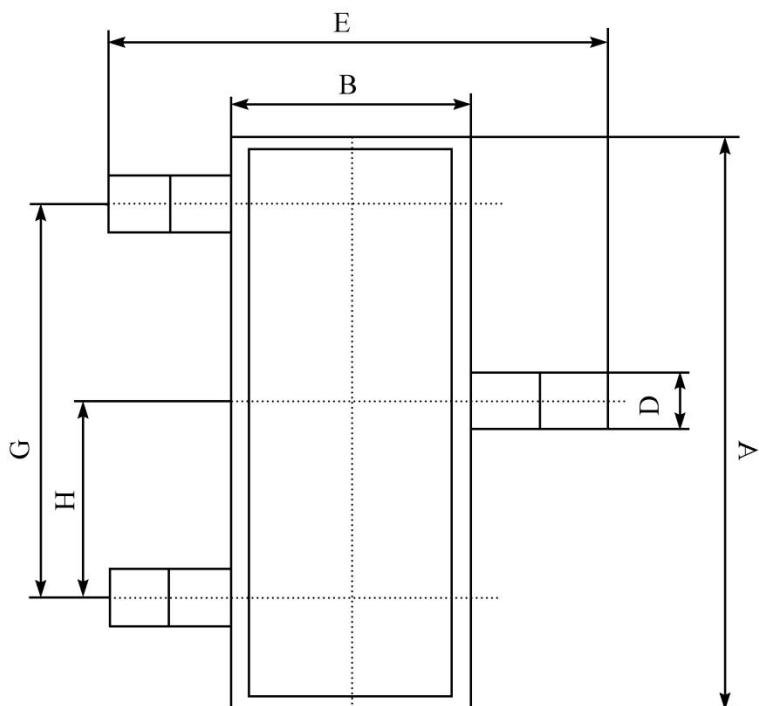

序號	數值及公差
A	2.90 ± 0.10
B	1.30 ± 0.10
C	1.00 ± 0.10
D	0.40 ± 0.10
E	2.40 ± 0.20
G	1.90 ± 0.10
H	0.95 ± 0.05
J	0.13 ± 0.05
K	$0.00-0.10$
M	≥ 0.2
N	0.60 ± 0.10
P	$7 \pm 2^\circ$

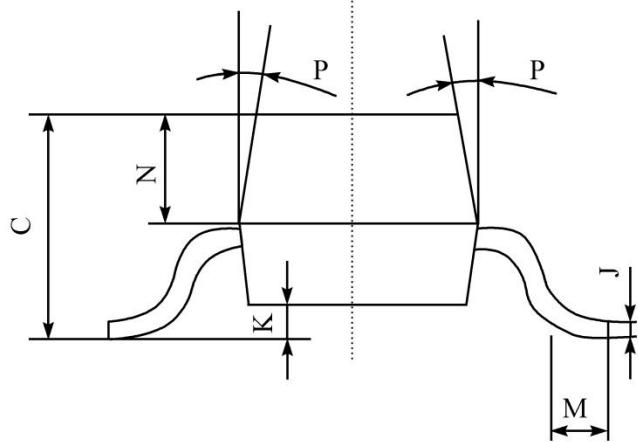

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by FOSAN manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [BSC884N03MS G](#) [BSF024N03LT3 G](#)
[PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-](#)
[7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#)
[SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#)
[IPS60R1K0PFD7SAKMA1](#)