



# 安徽富信半导体科技有限公司

ANHUI FOSAN SEMICONDUCTOR TECHNOLOGY CO., LTD.

PXT8050


## SOT-89 Bipolar Transistor 双极型三极管

### ■ Features 特点

NPN Power Amplifier 功率放大

### ■ Absolute Maximum Ratings 最大额定值

1. BASE
2. COLLECTOR
3. EMITTER



Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Collector-Base Voltage 集电极基极电压	$V_{CBO}$	40	V
Collector-Emitter Voltage 集电极发射极电压	$V_{CEO}$	25	V
Emitter-Base Voltage 发射极基极电压	$V_{EBO}$	5	V
Collector Current 集电极电流	$I_C$	1500	mA
Power dissipation 耗散功率	$P_C(T_a=25^\circ\text{C})$	500	mW
Thermal Resistance Junction-Ambient 热阻	$R_{\theta JA}$	250	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature 结温和储藏温度	$T_J, T_{stg}$	-55to+150 $^\circ\text{C}$	

### ■ Device Marking 产品打标

PXT8050=Y1




## ■ Electrical Characteristics 电特性


(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Collector-Base Breakdown Voltage 集电极基极击穿电压(I <sub>C</sub> =100uA, I <sub>E</sub> =0)	BV <sub>CBO</sub>	40	—	—	V
Collector-Emitter Breakdown Voltage 集电极发射极击穿电压(I <sub>C</sub> =1mA, I <sub>B</sub> =0)	BV <sub>CEO</sub>	25	—	—	V
Emitter-Base Breakdown Voltage 发射极基极击穿电压(I <sub>E</sub> =100uA, I <sub>C</sub> =0)	BV <sub>EBO</sub>	5	—	—	V
Collector-Base Leakage Current 集电极基极漏电流(V <sub>CB</sub> =40V, I <sub>E</sub> =0)	I <sub>CBO</sub>	—	—	100	nA
Collector-Emitter Punch Throng Current 集电极发射极穿透电流(V <sub>CE</sub> =20V, V <sub>BE</sub> =0)	I <sub>CES</sub>	—	—	100	nA
Emitter-Base Leakage Current 发射极基极漏电流(V <sub>EB</sub> =5V, I <sub>C</sub> =0)	I <sub>EBO</sub>	—	—	100	nA
DC Current Gain 直流电流增益(V <sub>CE</sub> =1V, I <sub>C</sub> =100mA)	H <sub>FE</sub> (1)	85	—	400	
DC Current Gain 直流电流增益(V <sub>CE</sub> =1V, I <sub>C</sub> =800mA)	H <sub>FE</sub> (2)	40	—	—	
Collector-Emitter Saturation Voltage 集电极发射极饱和压降 (I <sub>C</sub> =800mA, I <sub>B</sub> =80mA)	V <sub>CE(sat)</sub>	—	—	0.5	V
Base-Emitter Saturation Voltage 基极发射极饱和压降 (I <sub>C</sub> =800mA, I <sub>B</sub> =80mA)	V <sub>BE(sat)</sub>	—	—	1.2	V
Transition Frequency 特征频率(V <sub>CE</sub> =10V, I <sub>C</sub> =50mA)	f <sub>T</sub>	100	—	—	MHz
Output Capacitance 输出电容(V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz)	C <sub>ob</sub>	—	13	—	pF

## Typical Characteristic Curve 典型特性曲线

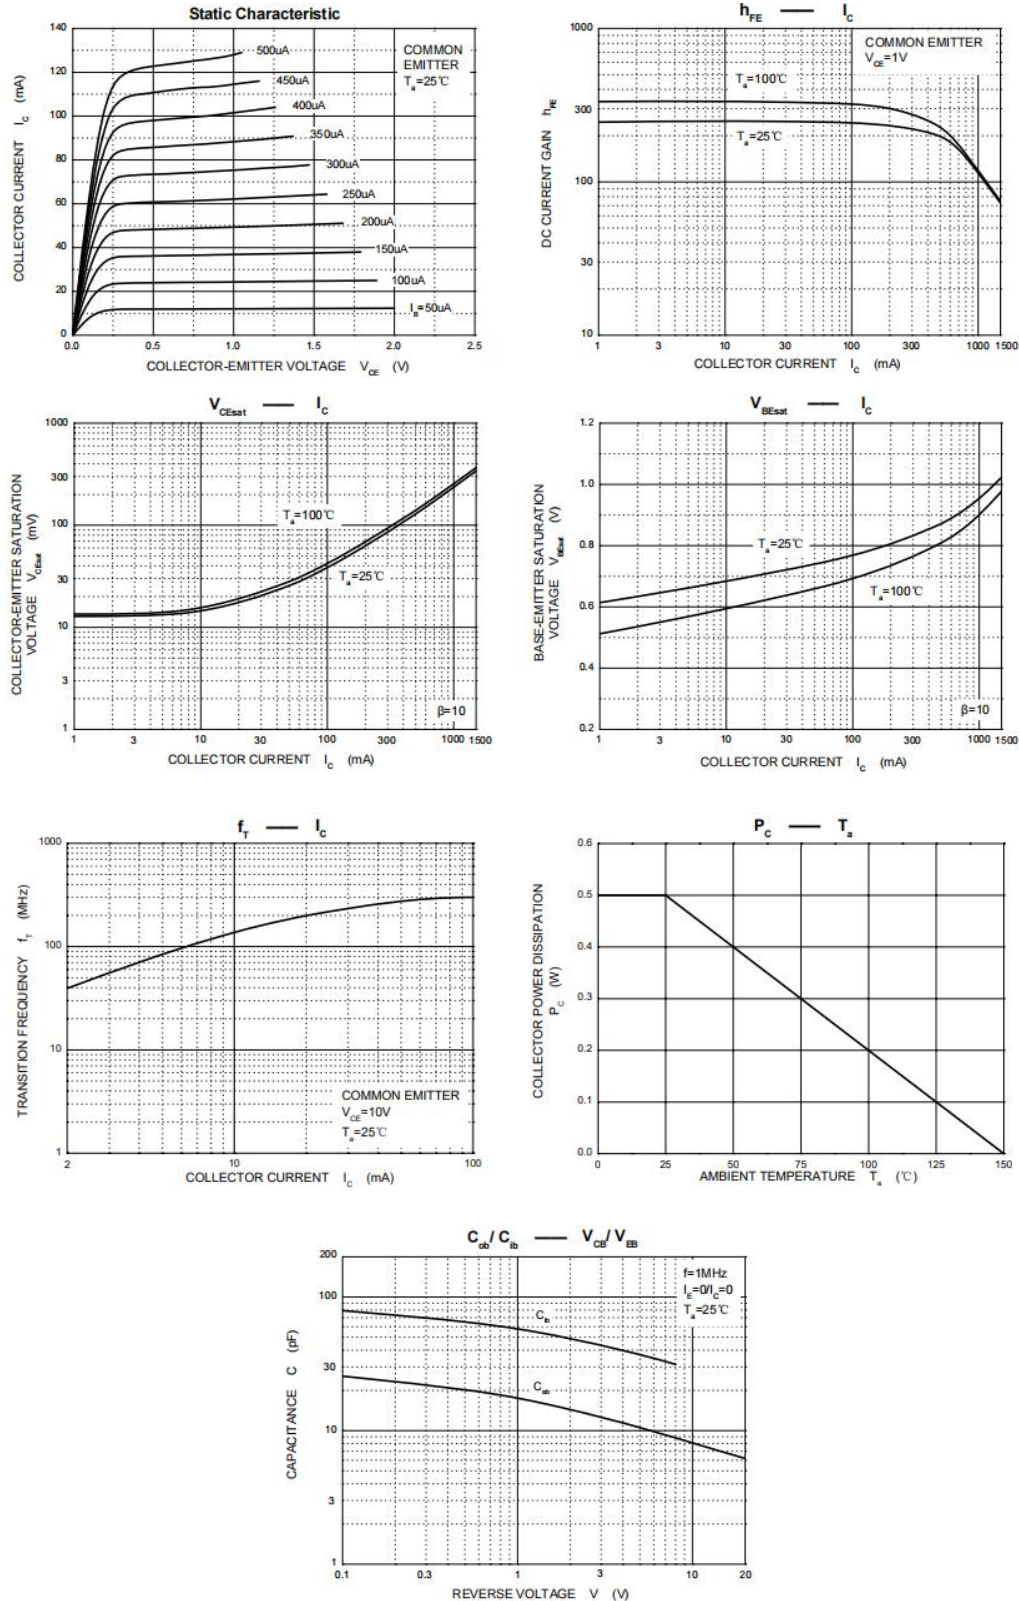

## ■Dimension 外形封装尺寸

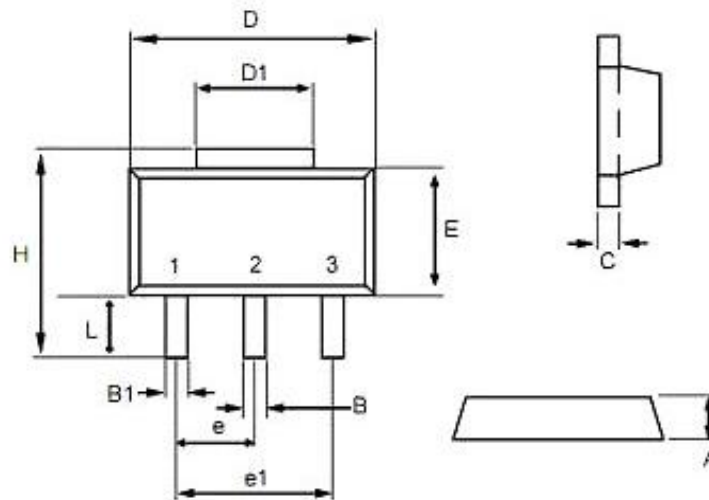

Dim	min	max
A	1.40	1.60
B	0.40	0.56
B1	0.35	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.35	1.83
e	1.50 BSC	
e1	3.00 BSC	
E	2.29	2.60
H	3.75	4.25
L	0.80	1.20

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [FOSAN manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)