

HCMOS 2.0x1.6mm 3.3V SMD Oscillator



Model: F130 SERIES

RoHS Compliant / Pb Free

Rev. 3/9/2011

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- 3.3V Operation
- Standby Function
- Tape and Reel (3,000 pcs. STD)

• PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
837-Frequency-xxxxx	F130	±100PPM ¹	-20 ~ +70	1.000 ~ 80.000
837A-Frequency-xxxxx	F130R	±100PPM ¹	-40 ~ +85	1.000 ~ 80.000
837B-Frequency-xxxxx	F135	±50PPM ¹	-20 ~ +70	1.000 ~ 80.000
837C-Frequency-xxxxx	F135R	±50PPM ¹	-40 ~ +85	1.000 ~ 80.000
837D-Frequency-xxxxx	F136	±25PPM ²	-10 ~ +60	1.000 ~ 80.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.000~ 80.000 MHz
Storage Temperature Range (T _{STG})	-40°C ~ +85°C
Supply Voltage (V _{DD})	3.3V ± 10%
Input Current (I _{DD})	
1.000000 ~ 40.000000 MHz	5mA
40.000001 ~ 60.000000 MHz	10mA
60.000001 ~ 80.000000 MHz	15mA
Output Symmetry (50% V _{DD})	45% ~ 55%
Rise Time (10% ~ 90% V _{DD})	6nS
Fall Time (90% ~ 10% V _{DD})	6nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	4mA Min
(I _{OH})	-4mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (T _s)	2mS
Output Disable Time ³	50uS
Output Enable Time ³	2mS
Phase Noise (36 MHz @ 1 kHz offset)	-120dBc/Hz Typ.
Maximum Soldering Temp / Time	260°C ±5°C / 5 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow freq. shift and one year aging.

² Inclusive of 25°C tolerance and operating temperature range.


³ An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Notes: A 0.01µF capacitor should be placed between V_{DD} (Pin 4) and GND (Pin2) to minimize power supply noise.

Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary.

All specifications subject to change without notice.

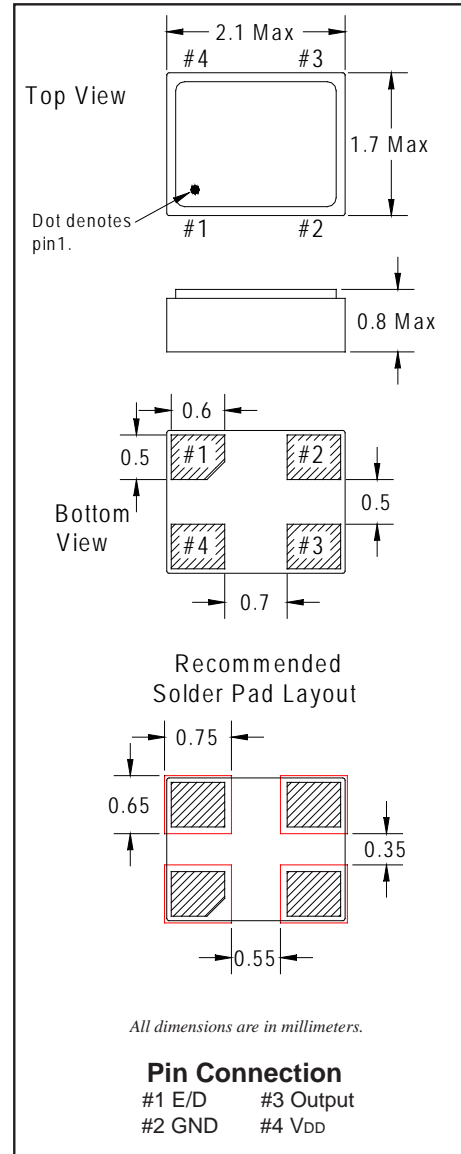

• ENABLE / DISABLE FUNCTION

Pin 1	OUTPUT (Pin 3)
OPEN ³	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

HCMOS 2.0x1.6mm 3.3V SMD Oscillator



Model: F130 SERIES

RoHS Compliant / Pb Free

Rev. 3/9/2011


Page 2 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F130 Series	∅1.5	4.0	4.0	3.5	8.0	1.15	3,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F130 Series	2.0	∅13	∅21	∅60	∅180	9.0	1.7

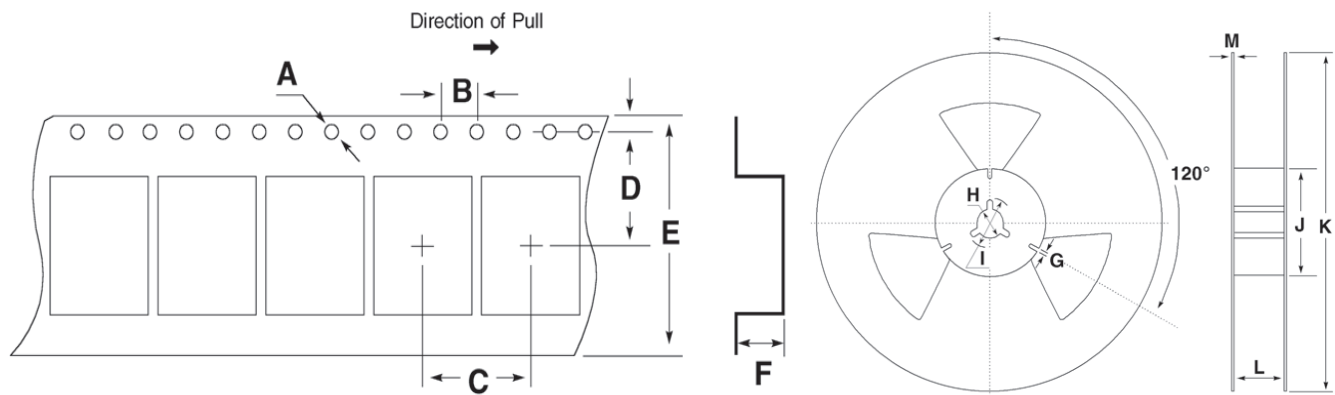

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Fox](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XLH735025.000JU4I8](#)