



HCMOS 5.0x3.2mm SMD Oscillator O5HS DATASHEET

(Former F510L, F540L, F530L Series)

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges as wide as -40°C to $+85^{\circ}\text{C}$
- Supply Voltages: 1.8V, 2.5V, 3.3V

1.8V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_0)	1 ~ 160MHz
Storage Temperature Range (T_{STG})	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	$1.8V \pm 5\%$
Input Current (I_{DD})	
1.000 ~ 32.000MHz	5mA
>32.000 ~ 70.000MHz	10mA
>70.000 ~ 120.000MHz	15mA
>120.000 ~ 160.000MHz	30mA
Standby Current	$10\mu\text{A}$
Output Symmetry (50% V_{DD})	40% ~ 60%
Rise/Fall Time (20%/80% V_{DD} Levels) (T_R/T_F)	
1.000 ~ 32.000MHz	5.0nS
>32.000 ~ 120.000MHz	3.5nS
>120.000 ~ 160.000MHz	3.0nS
Output Voltage (V_{OL})	20% V_{DD}
(V_{OH})	80% V_{DD} Min
Output Load (HCMOS)	15pF
Start-up Time (T_S)	10mS
Output Disable Time ¹	30nS
Output Enable Time ¹	10mS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 1.8V

Frequency Stability	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 160.000
$\pm 100\text{PPM}^2$	$-40 \sim +85$	1.000 ~ 160.000
$\pm 50\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 160.000
$\pm 50\text{PPM}^2$	$-40 \sim +85$	1.000 ~ 160.000
$\pm 25\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 160.000
$\pm 25\text{PPM}^3$	$-40 \sim +85$	1.000 ~ 160.000
$\pm 20\text{PPM}^3$	$-10 \sim +70$	1.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance, operating temperature range.



© Copyright 2019 Fox Electronics. All rights reserved

Title / Description: O5HS SERIES STANDARD SPECIFICATIONS	
Drawing Number: O5HS-DOC-1	Size: A
Part Number:	Cage: 61429
Draftsperson: BEC	Approved: MAJ
Revision Date: 08/12/2019	



2.5V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F _O)	1 ~ 160 MHz
Storage Temperature Range (T _{STG})	-55 ~ +125°C
Supply Voltage (V _{DD})	2.5V±5%
Input Current (I _{DD})	
1.000 ~ 32.000MHz	7mA
>32.000 ~ 50.000MHz	12mA
>50.000 ~ 125.000MHz	26mA
>125.000 ~ 160.000MHz	35mA
Standby Current	10µA
Output Symmetry (50% V _{DD})	
1.000 ~ 50.000MHz	45% ~ 55%
> 50.000 ~ 160.000MHz	40% ~ 60%
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	5nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Load (HCMOS)	15pF
Start-up Time (T _S)	10mS
Output Disable Time ¹	15 nS
Output Enable Time ¹	10mS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

• Available Options by Stability & Operating Temp for 2.5V

Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.000 ~ 160.000
±100PPM ²	-40 ~ +85	1.000 ~ 160.000
+50PPM ²	-10 ~ +70	1.000 ~ 160.000
±50PPM ²	-40 ~ +85	1.000 ~ 160.000
±25PPM ²	-10 ~ +70	1.000 ~ 160.000
±25PPM ³	-40 ~ +85	1.000 ~ 160.000
±20PPM ³	-10 ~ +70	1.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance, operating temperature range.



Title / Description: O5HS SERIES STANDARD SPECIFICATIONS	
Drawing Number: O5HS-DOC-1	Size: A
Part Number:	Cage: 61429
Draftsperson: BEC	Approved: MAJ
Revision Date: 08/12/2019	



3.3V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1 ~ 170MHz
Storage Temperature Range (T _{STG})	-55 ~ +125°C
Supply Voltage (V _{DD})	3.3V±10%
Input Current (I _{DD})	
1.000 ~ 32.000MHz	15mA
>32.000 ~ 50.000MHz	20mA
>50.000 ~ 67.000MHz	25mA
>67.000 ~ 170.000MHz	40mA
Standby Current	10µA
Output Symmetry (50% V _{DD})	
1.000 ~ 50.000MHz	45% ~ 55%
>50.000 ~ 170.000MHz	40% ~ 60%
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	
1.000 ~ 80.000MHz	6nS
>80.000 ~ 125.000MHz	4nS
>125.000 ~ 170.000MHz	3nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	2 mA Min
(I _{OH})	-2 mA Min
Output Load (HCMOS)	15pF
Start-up Time (T _s)	10mS
Output Disable Time ¹	150nS
Output Enable Time ¹	10mS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z


• Available Options by Stability & Operating Temp for 3.3V

Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM ²	-10 ~ +70	1.000 ~ 170.000
±100PPM ²	-20 ~ +70	1.000 ~ 170.000
±100PPM ²	-40 ~ +85	1.000 ~ 170.000
±50PPM ²	-10 ~ +70	1.000 ~ 170.000
±50PPM ²	-20 ~ +70	1.000 ~ 170.000
±50PPM ²	-40 ~ +85	1.000 ~ 170.000
±25PPM ²	-10 ~ +70	1.000 ~ 170.000
±25PPM ²	-20 ~ +70	1.000 ~ 170.000
±25PPM ³	-40 ~ +85	1.000 ~ 170.000
±20PPM ³	-10 ~ +70	1.000 ~ 170.000
±20PPM ³	-20 ~ +70	1.000 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open.


² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, one-year aging, shock, and vibration.

³ Inclusive of 25°C tolerance, operating temperature range.

 © Copyright 2019 Fox Electronics. All rights reserved	Title / Description: O5HS SERIES STANDARD SPECIFICATIONS		
	Drawing Number: O5HS-DOC-1		Size: A
	Part Number:		Cage: 61429
	Draftsperson: BEC	Approved: MAJ	Revision Date: 08/12/2019



DIMENSIONS / MECHANICAL SPECIFICATIONS

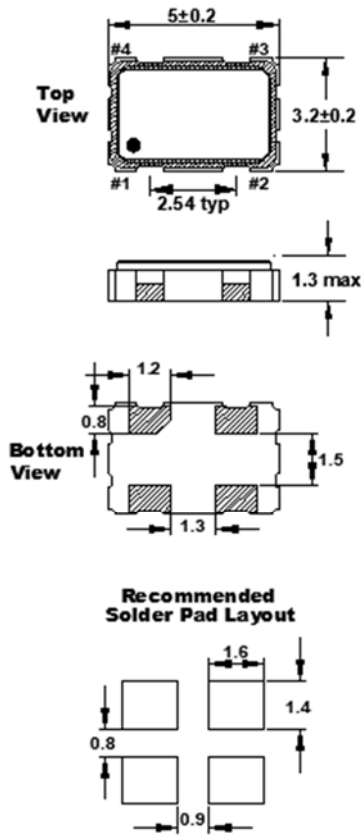

Dimensions in millimeters

Pin Connections

#1 E/D #3 Output
 #2 GND #4 VDD

Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes

Notes:

*A 0.01µF capacitor should be placed between V_{DD} (Pin 4) and GND (Pin2) to minimize power supply line noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary


	Title / Description: O5HS SERIES STANDARD SPECIFICATIONS	
	Drawing Number: O5HS-DOC-1	Size: A
	Part Number:	Cage: 61429
	Draftsperson: BEC	Approved: MAJ
		Revision Date: 08/12/2019



HCMOS 5.0x3.2mm SMD Oscillator

O5HS DATASHEET

(Former F510L, F540L, F530L Series)

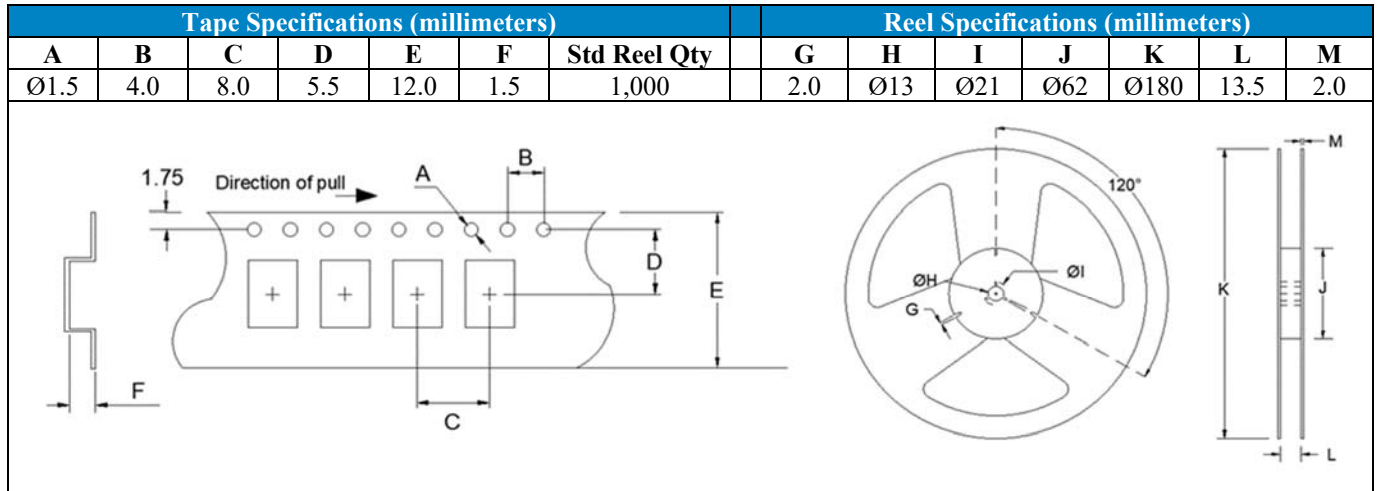

Available Options & Part Identification*

Example: **F O5HS C B M 25.0**

F	O5HS	C	B	M	25.0
Fox	Model Number	Voltage K = 1.8V±5% H = 2.5V±5% C = 3.3V±10%	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C F = -20 to +70°C M = -40 to +85°C	Frequency

*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V_{DD}.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369)
or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

Product use: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third-party owners.

	Title / Description: O5HS SERIES STANDARD SPECIFICATIONS	
	Drawing Number: O5HS-DOC-1	Size: A
	Part Number:	Cage: 61429
	Draftsperson: BEC	Approved: MAJ
		Revision Date: 08/12/2019

© Copyright 2019 Fox Electronics. All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for fox manufacturer:

Other Similar products are found below :

[278LF-20-29](#) [218-20-17966](#) [278LF-5-11](#) [589-33.33-3 TR](#) [218-25-94](#) [FD-25](#) [FOXLF049-20](#) [FOXSDLF/240F-20](#) [FXO-HC736R-125](#)
[FO5LSCDM100.00](#) [FOX924B-10.000](#) [FOXSDLF/240F-20/TR](#) [F4105R-250](#) [HC49ULF-11.0592MHz](#) [FOXSDLF/040R/TR](#) [VCS25AXT-447](#)
[FO7HSCAM8.0](#) [FOXLF098-20](#) [70M15A](#) [FO7HHAAM32.0](#) [FO7HHAAM20.0-BULK](#) [FO7HSCDM50.0](#) [FC7BSCCMM6.0-T1](#)
[FOXSLF/120-20](#) [VCS25AXT-270 27.000MHZ](#) [FOX801BELF-160](#) [FOXLF250F-20](#) [FOXSDLF/049-20/TR](#) [FXO-LC735RGB-156.25](#)
[FOXSDLF/245FR-20/TR](#) [FOXSDLF/200-20/TR](#) [FO7HSCBM3.579545-BULK](#) [FC3VREEEM38.4-T1](#) [FOX923CH-19.20M](#) [FXO-HC735-48](#)
[FO7HSCAE48.0-BULK](#) [FOXSDLF/184-20](#) [F1100E-48.000MHZ](#) [FOXLF221-20](#) [FO7HSCDM20.0-BULK](#) [FOXSLF/245F-20](#) [FOXSLF/073-20-LF](#) [FXO-PC536R-150](#) [FOXSLF041](#) [F4100-75.00](#) [FOXSLF/160-20](#) [FOXSLF/240F-20](#) [FOXLF05A](#) [NC38LF-327](#) [FXU-LC536R-212.50](#)