

SPECIFICATIONS

Mechanical

- Contact Normal Force: 75g min.
- Durability: 100 Cycles
- Contact Retention Force: 0.45kg min.

EH Series


- Vertical Type, T/H
- 1.27mm [.050"] Pitch
- 120 Pos.

Electrical



- Current Rating: 1.0A, 30 Rise above Ambient
- Contact Resistance: 30mW max. initial. 40mW max. after Test
- Dielectric Withstand Voltage: 500V min. at Sea Level
- Pin to Pin Insulation Resistance: 1000MW min.

Physical


- Housing: Thermoplastic, UL 94V-0 rated in White Color
- Contact: Copper alloy
- Plating: See "ORDERING INFORMATION"
- Operating Temperature: -40 to +105

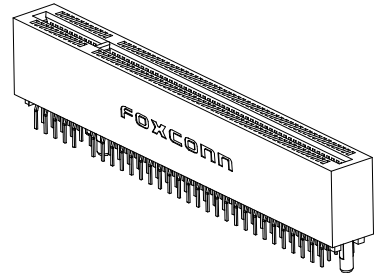

DRAWING

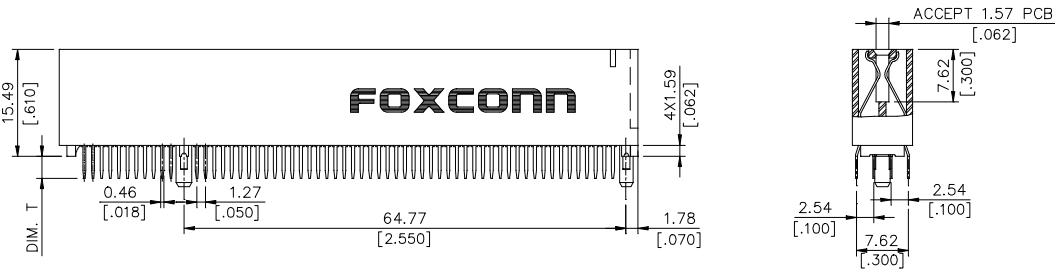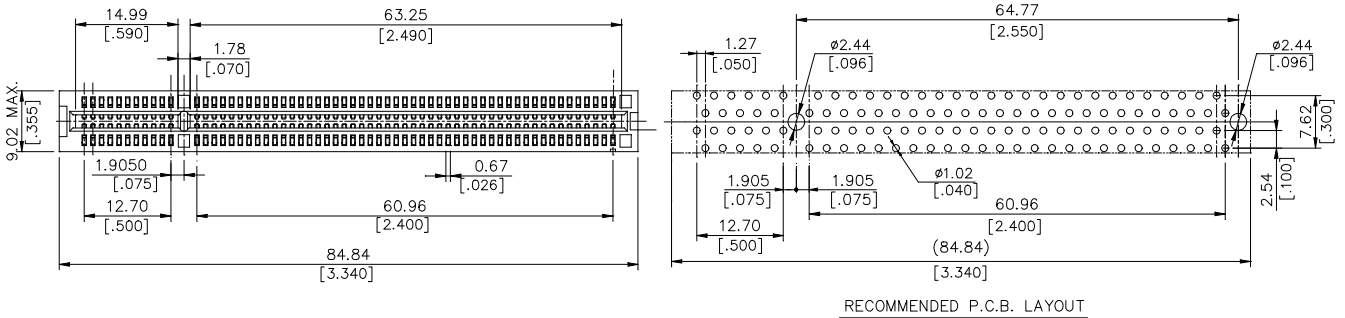

ORDERING INFORMATION

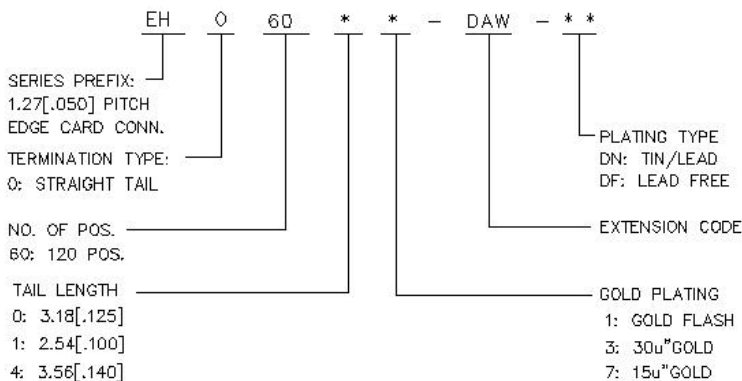

EH0604*-DAW-**	3.56 [.140]	2.36±0.13 [.093±.005]
EH0601*-DAW-**	2.54 [.100]	1.57±0.13 [.062±.005]
EH0600*-DAW-**	3.18 [.125]	1.57±0.13 [.062±.005]
PROD. NO.	DIM. T	PCB THICKNESS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Foxconn](#) manufacturer:

Other Similar products are found below :

[2E0BC21-S64BM-7H](#) [2E0BC21-S85BM-7H](#) [2EF5497-DA9D0-8H](#) [2EF5497-DA9DB-8H](#) [2EF5B57-DA9DN-5F](#) [2EG04927-D2DB-DF](#)
[2EG04927-D2D-DF](#) [2EG04927-D2LN-DF](#) [2EG08217-D2D-DF](#) [2EG14917-D2D8-4F](#) [2EG24927-D5D1-JF](#) [2EG28213-D5D-4F](#) [2EM5407-](#)
[B19BL-8F](#) [2EZ00161-PH2-4F](#) [3H993321-4M41-01H](#) [3S000000-3L-4F](#) [3S1020F3-AD4-4F](#) [3S103823-01-7F](#) [3VD21203-H7U0-4H](#)
[3VM11201-D730-7H](#) [AH58897-T2B20-3F](#) [AS0A621-H2R6-7H](#) [AS0A621-H2S6-7H](#) [AS0A621-H8RN-7H](#) [AS0A621-H8SN-7H](#) [AS0A621-](#)
[HARN-7H](#) [AS0A621-HASN-7H](#) [AS0A626-HASN-7H](#) [AS0A626-J4R6-7H](#) [AS0A821-H2RB-7H](#) [AS0A821-H2SB-7H](#) [AS0A826-H2RB-7H](#)
[AS0A826-H2SB-7H](#) [AS0B221-S52Q-7H](#) [AS0B221-S68Q-7H](#) [AS0B221-S90Q-7H](#) [AS0B226-S99Q-7H](#) [AS0B821-S55B-7H](#) [AS0B826-S78B-](#)
[7H](#) [AS0BC21-S30BA-7H](#) [AS0BC21-S30BB-7H](#) [AS0BC21-S30BE-7H](#) [AS0BC21-S30BM-7H](#) [AS0BC21-S40BB-7H](#) [AS0BC21-S40BE-7H](#)
[AS0BC21-S48BE-7H](#) [ASAA821-EARB0-7H](#) [ASAA821-H4SB5-7H](#) [ASAA826-E8SB0-7H](#) [ASOB226-S52Q-7H](#)