## 1. ELECTRICAL SPECIFICATIONS @25°C

1.1 OCL: 350 uH Min @ 100 KHz, 0.1V with 8mA DC Bias

350 mA Current Capability

1.2 Leakage Inductance: 0.5uH Max @ 100KHz, 0.2V

1.3 DCR: 1.4 Ω Max

1.4 Turns Ratio: 1CT:1CT

1.5 Polarity: 1-16, 6-11 In-Phase

1.6 Insertion Loss: -1.0 dB Max. @ 0.3-100 MHz

1.7 Return Loss: -18 dB Min. @ 1-30 MHz

-14 dB Min. @ 30-60MHz

-12 dB Min.@ 60-80 MHz

1.8 Cross Talk: -30 dB Min@ 1-100 MHz

1.9 Common Mode Rejection : -30 dB Min@ 1-100 MHz

1.10 Isolation HI-POT: 1500Vrms 2mA 60Second

1.11 Operating temperature  $0^{\circ}$ C to  $+70^{\circ}$ C


DRAWN BY:	CHECKED BY:	APPROVED BY:	TITLE: 10/100 BASE-T  FPE PART NO : H16101MC	
Spencer				

*|=|>|E* ® |


Dong guan Meixin Science and Technology Co., Ltd

REV:B PAGE: 1/2

## 2. SCHEMATICS

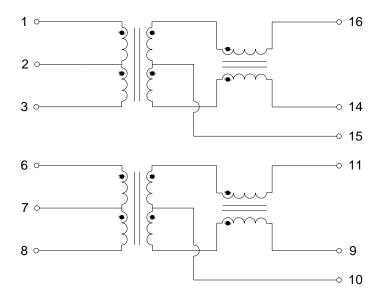

## 3. DIMENSIONS & MARKING

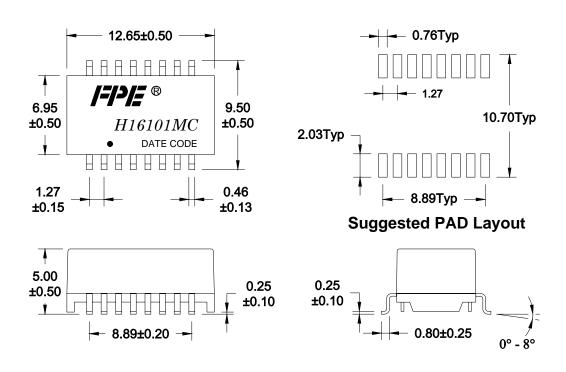

DRAWN BY:	CHECKED BY:	APPROVED BY:	TITLE: 10/100 BASE-T		
Spencer			FPE PART NO : H	Г NO : H16101MC	
= > E ®	Dongguan Meixin Science and Technology Co., Ltd			REV: B	
1-1-12				PAGE: 2 / 2	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by FPE manufacturer:

Other Similar products are found below:

749023020 CU4S0506AT-2655-H1 MET-58 PE-64961 H5008FNL H5020FNLT H5079NLT 1879479-1 1879564-1 PA1277NLT
PA1528ANL PA2007NLT FL1066 T1137NLT T3012NL PE-65812FNL TTC-100 TTC-143-H TTC-5032-1 HX1234NLT HX5008FNLT
100B-1001XNL PA1282NLT HX5084FNL T1108NLT 2-1879391-5 TTC-266-2 3-1879385-4 PA1032NL H2009FNLT PA0801NLT
TTC-266 X-1619 SM51295PEL T5008NLT PE-68517T HX1294NLT HX5084FNLT H5015FNLT H6080NLT CX2024NL HX1294FNLT
TX1473NLT PE-69011NLT CX2047LNLT CX2043LNLT DCT20EFD-U32S003 H5120NLT H7137FNLT H1259NLT