ignion^w

Your innovation. Accelerated.

COMPACT DUAL-BAND REACH XtendTM (NN01-004)

DATASHEET
COMPACT DUAL-BAND REACH XtendTM (NN01-004)



COMPACT DUAL-BAND REACH XtendTM (NN01-004) — WLAN (2.4 – 2.5 GHz and 4.9 – 5.875 GHz)

Ignion specializes in enabling effective mobile communications. Using Ignion technology, we design and manufacture optimized antennas to make your wireless devices more competitive. Our mission is to help our clients develop innovative products and accelerate their time to market through our expertise in antenna design, testing and manufacturing.

The Compact Dual-band Reach Xtend[™] chip antenna for 802.11 ac/a/b/g/n WLAN systems is a tiny rectangular 3D-shaped antenna specifically designed for high performance USB devices and other small PCB devices operating at both 2.4 GHz and 5 GHz bands, where high performance and low-cost are mandatory. The Compact Dual-band Reach Xtend[™] antenna is built on glass epoxy substrate. Its small dimensions allow various configurations within the USB devices and may help Card-bus devices in the enhancement of their throughput by using MIMO algorithms with more than 2 antennas.

Taking advantage of the space-filling properties, this small monopole antenna is ideal for use within indoor (highly scattered) environments. The Fractus Compact Dualband Reach XtendTM chip antenna speeds your time to market by allowing you to easily integrate it within your industrial design (SMD mounting).

Product Benefits

Small form factor

Allows integration into space limited areas easily and efficiently with minimum clearance area.

High efficiency

Increases your device range, signal quality battery life.

Multiband behavior

Provides superior performance for both 2.4 and 5 GHz ISM bands in the same structure areas easily and efficiently.

Omnidirectional pattern

Optimizes device usage due to a uniform radiation pattern.

• Worldwide functionality

Enables devices to work globally in WLAN systems: Europe/ US/ Asia.

2

7.0 mm x 3.0 mm x 2.0 mm




PAT US 7,148,850, US 7,202,822

Last Update: January 2021



VSWR and Total Efficiency (%) vs. Frequency (GHz)

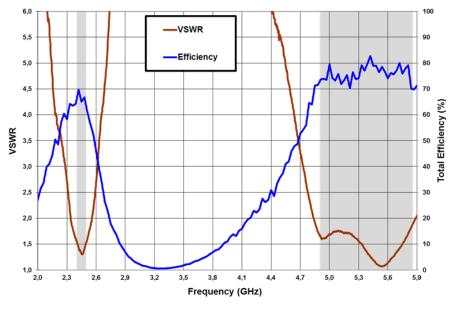

Technical Features	802.11 b/g/n	802.11 ac/a/n
Frequency Range	2.4 – 2.5 GHz	4.9 – 5.875 GHz
Average Efficiency	66.5 %	75.9 %
Peak Gain	1.5 dBi	4.7 dBi
VSWR	< 2:1	< 2:1
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.1 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Antenna Dimensions (L x W x H)	7.0 mm x 3.0 mm x 2.0 mm	

Measures from the evaluation board (EB_NN01-004) (55.4 mm x 20.0 mm x 0.8 mm)

See pictures of the evaluation boards and graphs of the specs in the <u>User Manual</u>.

For additional information, please visit http://www.ignion.io or contact info@ignion.io.

If you need assistance to design your matching network, please contact support@ignion.io, or try our free-of-charge¹ NN Wireless Fast-Track design service, you will get your chip antenna design including a custom matching network for your device in 24h¹. Other related to NN's range of R&D services is available at: https://www.ignion.io/rdservices/

3

Last Update: January 2021

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: https://www.ignion.io/fast-track-project/

ignion^w

Contact: support@ignion.io +34 935 660 710

Barcelona

Av. Alcalde Barnils, 64-68 Modul C, 3a pl. Sant Cugat del Vallés 08174 Barcelona Spain

Shanghai

Shanghai Bund Centre 18/F Bund Centre, 222 Yan'an Road East, Huangpu District Shanghai, 200002 China

New Dehli

New Delhi, Red Fort Capital Parsvnath Towers Bhai Veer Singh Marg, Gole Market, New Delhi, 110001 India

Tampa

8875 Hidden River Parkway Suite 300 Tampa, FL 33637 USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Fractus Antennas manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 GD35-17P-NF P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352