

ignion[™]


Your innovation.
Accelerated.

RUN mXTEND[™] **(NN02-224)**

DATASHEET

RUN mXTEND[™] (NN02-224)

The RUN mXTEND[™] cellular embedded **IoT antenna** is an example of the new generation of tiny antenna boosters available for multiband connectivity. The miniature antenna booster is connected to the RF transceiver through a matching network that shapes the frequency response of the wireless platform such as **2G, 3G, 4G** bands, but also for other regions of the spectrum for example **GNSS and Bluetooth**.

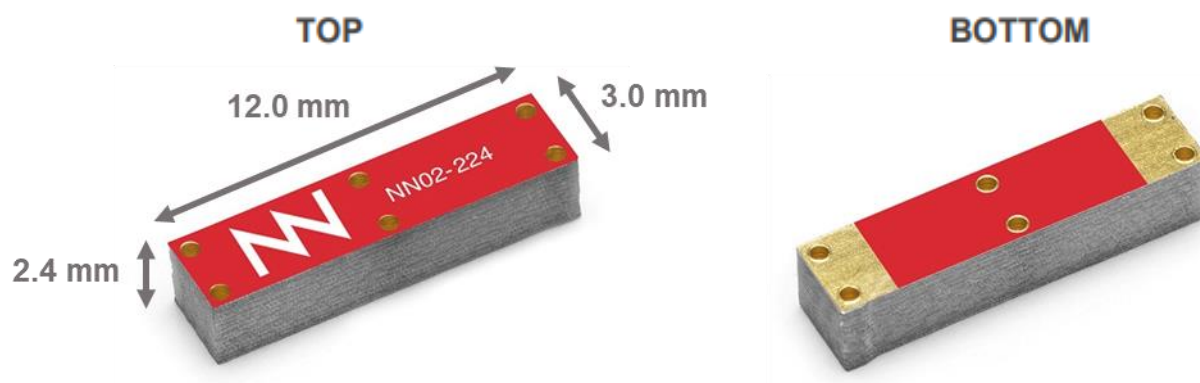

Product Benefits

- **Top performance:** Top multiband IoT performance in a ultracompact form factor: 12.0 mm x 3.0 mm x 2.4 mm.
- **Multiband & Multiport:** 2G/3G/4G/5G, LTE-M and NB-IoT applications
- **Global reach:** Through multiband performance (compatible with multiple regional standards).
- **Reliability:** Off-the-Shelf standard product, no antenna part customization (electronic optimization).
- **Use cases:** Small tracking devices, IoT sensors and IoT cellular/ISM modules, mobile devices.

Operation Bands Summary

- GSM, UMTS, 4G, GNSS, Bluetooth, Wi-Fi Dual Band (824 – 960MHz, 1710 – 2690MHz, 1561 – 1606MHz, 2400 – 2500MHz and 4900 – 5875MHz)

1. AVAILABLE SOLUTIONS SUMMARY

Class	Frequency Regions	Frequency range	More detailed info
1 Port	2	824 – 960 MHz & 1710 – 2690 MHz	<u>CELLULAR LTE</u>
1 Port	1	863 – 928 MHz	<u>ISM</u>
1 Port	3	1561 MHz, 1575 MHz & 1598 – 1606 MHz	<u>GNSS</u>
1 Port	1	2400 – 2500MHz	<u>BLUETOOTH</u>
1 Port	2	2400 – 2500MHz & 4900 – 5875MHz	<u>Wi-Fi DUAL BAND</u>

2. DETAILED AVAILABLE SOLUTIONS

2.1. LTE SOLUTION

Technical features	824 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 65 %	> 70 %
Peak Gain	1.8 dBi	1.9 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.19 g	
Temperature	-40 to + 125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	12.0 mm x 3.0 mm x 2.4 mm	

Technical features. Measures from the evaluation board (131 mm x 60 mm x 1 mm).

2.2 ISM SOLUTION

Technical features	863 – 870 MHz	902 – 928 MHz	863 – 928 MHz
Average Efficiency	> 85 %	> 85 %	> 85 %
Peak Gain	2.1 dBi	2.1 dBi	2.2 dBi
VSWR	< 2:1	< 2:1	< 2:1
Radiation Pattern	Omnidirectional		
Polarization	Linear		
Weight (approx.)	0.19 g		
Temperature	-40 to +125 °C		
Impedance	50 Ω		
Dimensions (L x W x H)	12.0 mm x 3.0 mm x 2.4 mm		

Technical features. Measures from the evaluation board with UFL cables (131 mm x 60 mm x 1 mm).

2.3 GNSS SOLUTION

Technical features	1561 MHz	1575 MHz	1598 – 1606 MHz
Average Efficiency	> 75 %	> 75 %	> 80 %
Peak Gain	2.9 dBi	3.0 dBi	3.3 dBi
VSWR	< 1.5:1		
Radiation Pattern	Omnidirectional		
Polarization	Linear		
Weight (approx.)	0.19 g		
Temperature	-40 to +125 °C		
Impedance	50 Ω		
Dimensions (L x W x H)	12.0 mm x 3.0 mm x 2.4 mm		

Technical features. Measures from the evaluation board with UFL cables (126.5 mm x 60 mm x 1 mm).

2.4 BLUETOOTH SOLUTION

Technical features	2400 – 2500MHz
Average Efficiency	> 75%
Peak Gain	4.2 dBi
VSWR	< 1.5:1
Radiation Pattern	Omnidirectional
Polarization	Linear
Weight (approx.)	0.19 g
Temperature	-40 to +125 °C
Impedance	50 Ω
Dimensions (L x W x H)	12.0 mm x 3.0 mm x 2.4 mm

Technical features. Measures from the evaluation board with UFL cables (126.5 mm x 60 mm x 1 mm).

2.5 Wi-Fi-DUAL BAND SOLUTION

Technical features	2400 – 2500 MHz	4900 – 5875 MHz
Average Efficiency	> 70 %	> 70 %
Peak Gain	2.9 dBi	3.1 dBi
VSWR	< 2.5:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.19 g	
Temperature	-40 to + 125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	12.0 mm x 3.0 mm x 2.4 mm	

Technical features. Measures from the evaluation board with a coplanar grounded transmission line (126.5 mm x 60 mm x 1 mm).

If you need assistance to design your matching network, please contact support@ignion.io

You can also try our free of charge¹ **NN Wireless Fast Track service** you will receive a tailored antenna design approach for free in 24h¹. discover the feasibility of your next wireless project including the antenna!

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: <https://www.ignion.io/fast-track-project/>

ignion[™]

Your innovation.
Accelerated.

Contact:
support@ignion.io
+34 935 660 710

Barcelona

Av. Alcalde Barnils, 64-68 Modul C, 3a pl.
Sant Cugat del Vallés
08174 Barcelona
Spain

Shanghai

Shanghai Bund Centre
18/F Bund Centre, 222 Yan'an Road East,
Huangpu District
Shanghai, 200002
China

New Dehli

New Delhi, Red Fort Capital Parsvnath Towers
Bhai Veer Singh Marg, Gole Market,
New Delhi, 110001
India

Tampa

8875 Hidden River Parkway
Suite 300
Tampa, FL 33637
USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Fractus Antennas](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [GD35-17P-NF](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)