






(1.00 mm) .0394"



FTMH-116-02-L-DV-P



# SMT MICRO TERMINAL STRIPS

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?FTMH](http://www.samtec.com?FTMH) or [www.samtec.com?FTM](http://www.samtec.com?FTM)

**Insulator Material:**  
Black Liquid Crystal Polymer


**Terminal Material:**  
Phosphor Bronze

**Current Rating (FTMH/CLM):**  
2.8 A per pin  
(2 pins powered)

**Operating Temp Range:**  
-55 °C to +125 °C

**Plating:**  
Sn or Au over  
50 μm (1.27 μm) Ni  
**RoHS Compliant:**  
Yes

Mates with:  
CLM, MLE

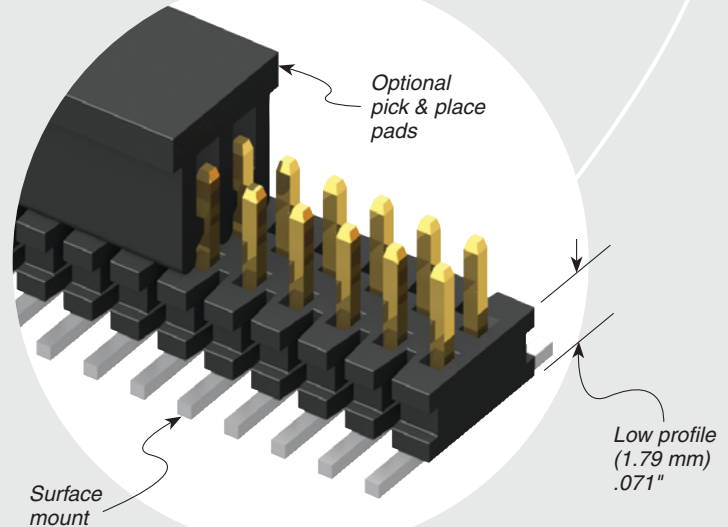

## PROCESSING

**Lead-Free Solderable:**  
Yes

-DV Lead Coplanarity:  
(0.10 mm) .004" max  
-DH Lead Coplanarity:  
(0.10 mm) .004" max (05-25)  
(0.15 mm) .006" max (26-50)\*  
\*(.004" stencil solution may be available; contact IPG@samtec.com)

## RECOGNITIONS


For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



<b>TYPE STRIP</b>	<b>1</b>	<b>NO. PINS PER ROW</b>	<b>LEAD STYLE</b>	<b>PLATING OPTION</b>
<b>FTMH</b> = SMT Micro		<b>FTMH</b> = 05 thru 50	<b>-02</b> = (1.91 mm) .075" Post (Mates with MLE)	<b>-F</b> = Gold flash on post, Matte Tin on tail
<b>FTM</b> = Micro Low Profile		<b>FTM</b> = 02 thru 50 (unshrouded) = 05 thru 46 (shrouded)	<b>-03</b> = (1.65 mm) .065" Post (Mates with CLM)	<b>-L</b> = 10 μm (0.25 μm) Gold on post, Matte Tin on tail

## ALSO AVAILABLE (MOQ Required)

- End shrouds with board locks
- Molded end shrouds for 05 through 08 positions
- Other platings

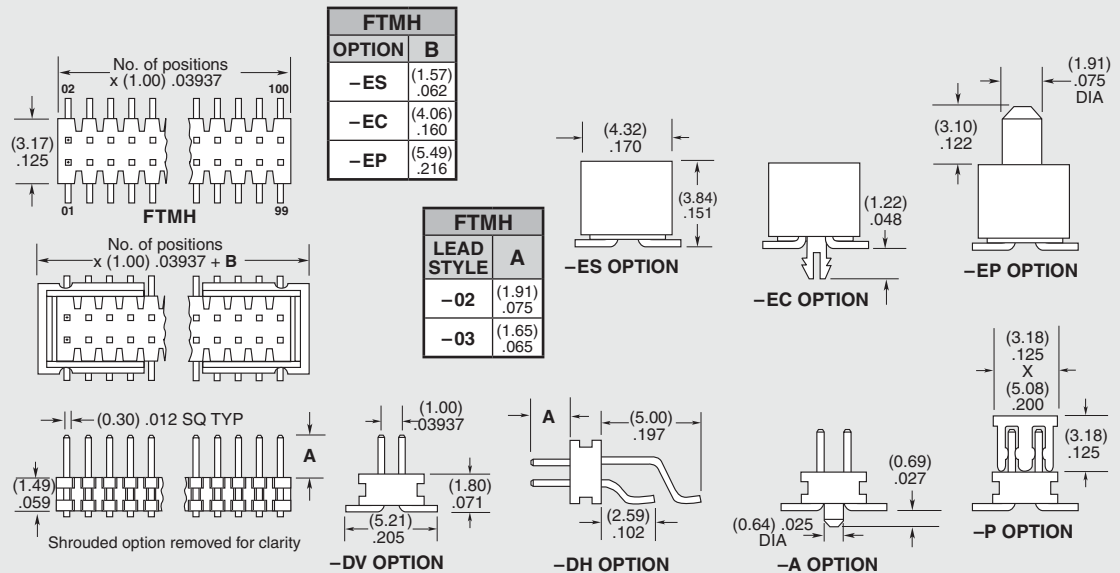


**Note:**  
Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.


[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.


FTMH-122-02-F-DV-EC




FTMH-120-02-L-DV




FTMH-135-02-F-DH





FTMH-125-02-L-DV



FTMH-128-03-L-DV-EP




**FTMH, FTM SERIES**

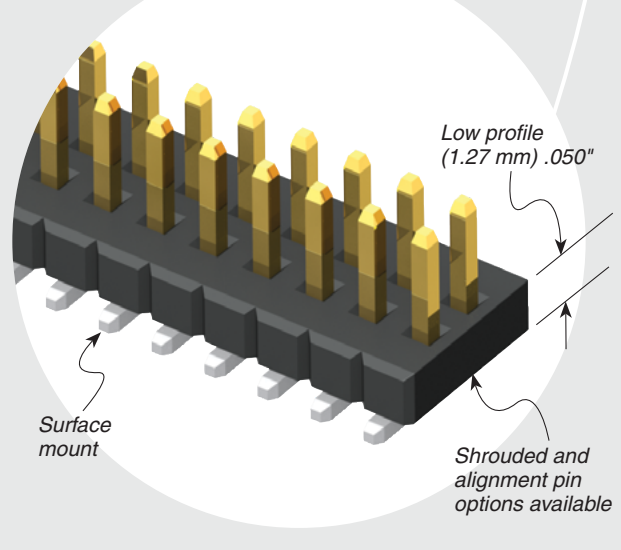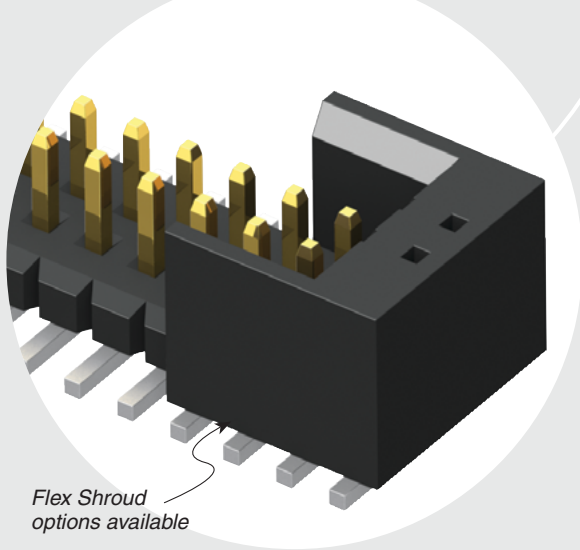

**ROW OPTION**

- DV = Dual Vertical
- DH = Dual Horizontal (FTMH only)



**FLEX SHROUD OPTIONS**

- (FTMH-DV only with 9 pins/row minimum)
- ES = End Shroud
- EC = End Shroud with Locking Clip (Manual placement required)
- EP = End Shroud with Guide Post (Use only when mating with CLM)







- (FTM only)
- S = End Shroud (05 positions minimum). Molded or press-fit shroud at Samtec's discretion (See assembly print at [www.samtec.com?FTM](http://www.samtec.com?FTM) for dimensions)
- SA = End Shroud with Alignment Pins (05 through 46 positions)

**OTHER OPTIONS**

- A = Alignment Pin (3 positions minimum) Metal or plastic at Samtec discretion (FTMH-DV only)
- K = (2.50 mm) .098" DIA Polyimide Film Pick & Place Pad (FTMH-DH only)
- P = Plastic Pick & Place Pad (-DV only) (6 positions minimum FTMH) (7 positions minimum FTM)
- TR = Tape & Reel

FTM	
OPTION	C
-S	(7.00) .276
-SA	(4.00) .157

FTM	
LEAD STYLE	D
-02	(1.91) .075
-03	(1.65) .065

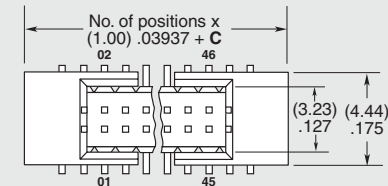

Shrouded options removed for clarity

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)